


### Non-Reversing, Three Pole NEMA Labeled Contactors with AC Coil ①

NEMA Size	Maximum Horsepower						Standard Auxiliary Contacts		Catalog Number	Price
	1Ø		3Ø				NO	NC		
	115V	230V	200V	230V	460V	575V				
00	1/3	1	1-1/2	1-1/2	2	2	1	0	CAN7-12-10-*	237.36
0	1	2	3	3	5	5	1	0	CAN7-16-10-*	266.38
1	2	3	7-1/2	7-1/2	10	10	1	0	CAN7-37-10-*	440.52
2	3	7-1/2	10	15	25	25	1	0	CAN7-43-10-*	470.58
3	7-1/2	15	25	30	50	50	1	0	CAN7-85-10-*	736.96



CAN7 NEMA1 labeled contactor (AC)

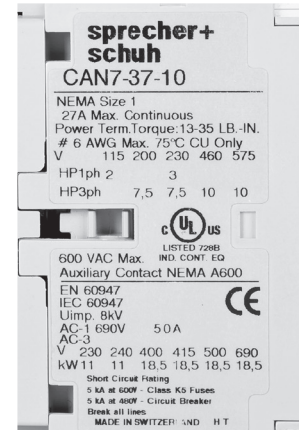

#### Application Notes

- NEMA contactors are UL Listed and rated in accordance with the requirements of NEMA standards publication ICS-2. These contactors are labeled for applications that require compliance with NEMA standards.
- Sizes are based on standard NEMA classifications.
- Easy coil change and contact replacement. See page A56 for CAN7 coils.
- Snap-on auxiliary contact blocks available in many configurations. See pages A47-A48.
- Available as open units or in Type 1, 3R, 4, 4X and 12 enclosures. Contact your Sprecher + Schuh representative for enclosed pricing. NEMA sized starters with AC Coils are listed on page C52.

#### CAN7 AC Coil Codes ②

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
	24Z	24V
120	110V	120V
208	~	208V
220W	~	208V-240V
240	220V	240V
277	240V	277V
380	380V-400V	440V
480	440V	480V
600	550V	600V

#### Ordering Instructions

Specify Catalog Number	
Replace (*) with Coil Code	See Coil Codes on this page.

- ① Refer to page A85 for CAN7 dimensional information.
- ② Other voltages available, see page A56 for other coil voltage.