

Motor Controllers and MCCBs

| | |
|--|-------|
| Series KT9 Motor Circuit Controllers | F1.2 |
| Series KTA9 Base Units | F1.4 |
| Series KTC9 Base Units | F1.6 |
| Series KTB9 Base Units | F1.8 |
| Series KTV9 Base Units | F1.10 |
| Accessories | F1.12 |
| Series KTU9 UL489 Molded Case Circuit Breakers | F1.30 |
| Accessories | F1.32 |
| Technical Information & Dimensions (Online) | F1.34 |
| Ecombo and EcomboPlus Starters | F1.40 |
| CLE8 / CLUE8 Ecombo Starters | F1.42 |
| CLE7 / CLUE7 Ecombo Starters | F1.44 |
| CLE+OL / CLUE+OL Three Component ECombo Starters | F1.49 |
| Enclosed KT9 Motor Controllers & Circuit Breakers | F1.56 |
| KT9 Type-E Manual Combination Controller | F1.57 |
| Explosion-proof KT9 Motor Controllers | F1.63 |
| KTU9 Molded Case Circuit Breakers | F1.65 |
| CX7 Ecombo KWIKstarters | F1.66 |
| CX7 Combination Controllers | F1.73 |
| CX7 Explosion-proof Controllers | F1.78 |
| CX7 Type E/F Simplex & Duplex Pump Controllers | F1.79 |
| Custom Multi-Starter Control Panels | F1.82 |
| Wiring Diagrams & Dimensions (Online) | F1.84 |
| Series KT5 Manual Motor Controllers | F1.89 |
| Accessories | F1.91 |
| Technical Information & Dimensions (Online) | F1.94 |

Continued . . .




| | |
|---|------|
| Series KT7 Motor Circuit Controllers-Discontinued | F2 |
| Series KTA7 Base Units | F4 |
| Series KTC7 Base Units | F6 |
| Series KTB7 Base Units | F8 |
| Series KTV7 Base Units | F10 |
| KF7 Fuse Holders | F19 |
| Technical Information & Dimensions (Online) | F20 |
| | |
| Series KTU7 UL489 Molded Case Circuit Breakers-Discontinued | F47 |
| Accessories | F49 |
| Technical Information & Dimensions (Online) | F51 |
| | |
| KT7 Ecombo and EcomboPlus Starters-Discontinued | F58 |
| CL8 / CLU8 Ecombo Starters | F60 |
| CL7 / CLU7 Ecombo Starters | F62 |
| CK7 / CKU7 EcomboPlus Starters | F66 |
| | |
| Enclosed KT7 Motor Controllers & Circuit Breakers - DISCONTINUED | F88 |
| KT7 Type-E Manual Combination Controller | F89 |
| Explosion-proof KT7 Motor Controllers | F93 |
| KTU7 Molded Case Circuit Breakers | F95 |
| CX7 Combination Controllers | F105 |
| Wiring Diagrams & Dimensions (Online) | F116 |
| | |
| KT4 Manual Motor Starters-Discontinued | F121 |
| Accessories | F123 |
| Technical Information & Dimensions (Online) | F127 |



Series KT9 Motor Circuit Controllers

Versatile, convenient
and space saving...
for a variety of
applications

Sprecher + Schuh's KT9 Series of Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual, Self-Protected Combination Motor Controllers (Type E) and Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

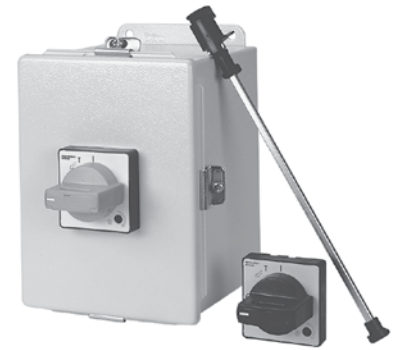

KT9s meet UL requirements for Type E manual motor controllers and "at-motor disconnects"

When UL/CSA Listed as Manual, Self-Protected Combination Motor Controllers, the KT9 Motor Protection Circuit Breakers provide all of the necessary NEC/CEC requirements for the protection and control of individual Motor Branch Circuits without additional branch circuit protective devices. According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

only one Branch Circuit Protective Device (BCPD) for the "Group". Series KT9 devices are also UL Listed for Tap Conductor protection in group installations, which helps reduce conductor sizing. According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices these devices certified for group motor installation may provide the following control and protection functions.



- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

- Disconnect for motor branch circuit
- Overload protection (thermal protection)
- Manual switching (motor control means)


Group motor installations eliminate the need for individual branch short-circuit protective devices for each motor circuit, reducing panel space, installation and wiring time, and costs. There is

See our online white paper

Methods of Applying


KT9

Motor Circuit Controllers




0.10...32A
Standard Interrupting Capacity

KTA9-32S



0.40...40A
High Interrupting Capacity

KTA/C9-40H




0.16...40A
High Interrupting Capacity

KT9-40H




Series KT9 devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Breaker according to IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

KT9 devices provide Trip Class 10 overload protection and phase loss sensitivity protection. These are suitable for single- and three- phase applications. Cat. No. KTV9 devices can also be applied at the output of a variable frequency drive (VFD) in multi-motor applications.

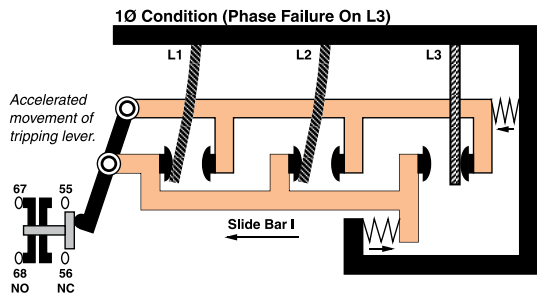

All KT9 Motor Circuit Controllers offer accelerated tripping under single phase conditions

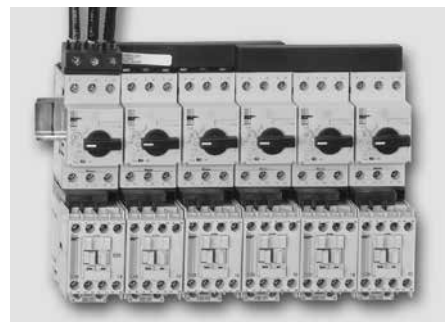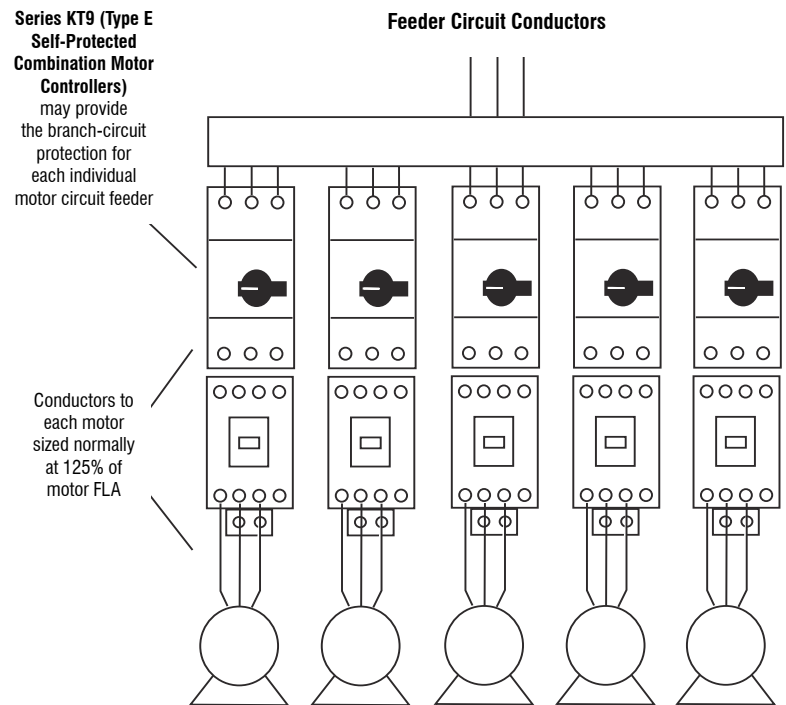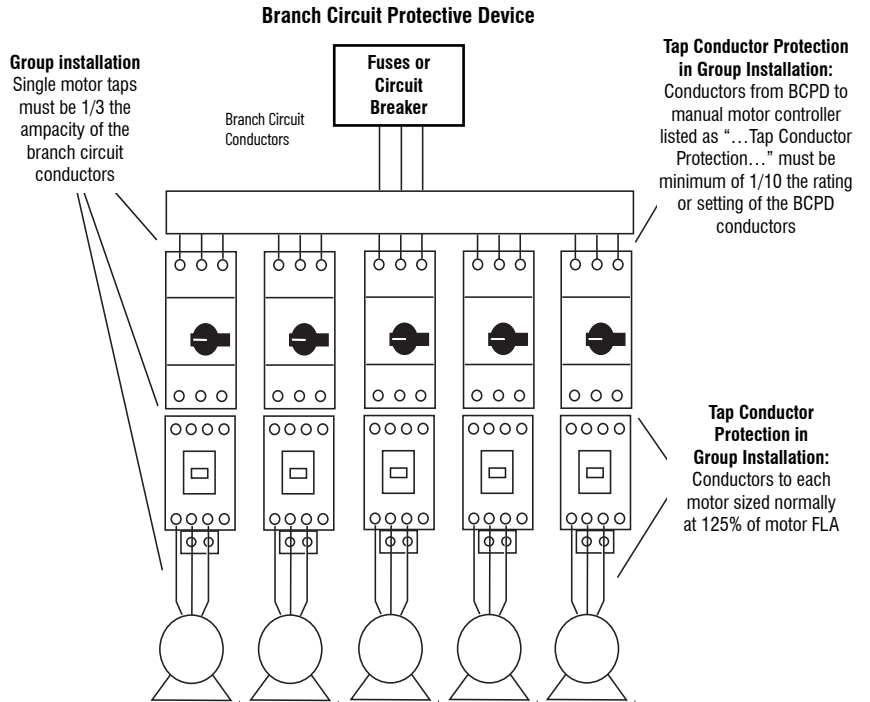

Using KT9s in Multi-Motor Starter applications can replace classic Branch Circuit Protection Devices and reduce panel space up to 60%

KTA9 Base Unit

| Typical Three Phase [HP] | | | | Current Adjustment Range [A] | Magnetic Release Response Current [A] | Catalog Number |
|--|-------|------|-------|------------------------------|---------------------------------------|----------------|
| 200V | 230V | 460V | 575V | | | |
| KTA9-32S Adjustable Thermal/Fixed Magnetic (14 x I_n) | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.4A |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 56 | KTA9-32S-4.0A |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 88 | KTA9-32S-6.3A |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 140 | KTA9-32S-10A |
| 3 | 5 | 10 | 10 | 10...16 | 224 | KTA9-32S-16A |
| 5 | 5 | 10 | 15 | 14.5...20 | 280 | KTA9-32S-20A |
| 5 | 7-1/2 | 15 | 20 | 18...25 | 350 | KTA9-32S-25A |
| 7-1/2 | 10 | 20 | 25 | 23...29 | 406 | KTA9-32S-29A |
| 7-1/2 | 10 | 20 | 30 | 26.5...32 | 448 | KTA9-32S-32A |
| KTA9-40H Adjustable Thermal/Fixed Magnetic (14 x I_n) | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-40H-0.63A |
| ~ | ~ | 1/2 | 1/2 | 0.62...1.0 | 14 | KTA9-40H-1.0A |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-40H-1.6A |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-40H-2.5A |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 56 | KTA9-40H-4.0A |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 88 | KTA9-40H-6.3A |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 140 | KTA9-40H-10A |
| 3 | 5 | 10 | 10 | 10...16 | 224 | KTA9-40H-16A |
| 5 | 5 | 10 | 15 | 14.5...20 | 280 | KTA9-40H-20A |
| 5 | 7-1/2 | 15 | 20 | 18...25 | 350 | KTA9-40H-25A |
| 7-1/2 | 10 | 20 | 25 | 23...29 | 406 | KTA9-40H-29A |
| 7-1/2 | 10 | 20 | 30 | 26.5...32 | 448 | KTA9-40H-32A |
| 10 | 10 | 25 | 30 | 30...36 | 432 | KTA9-40H-36A |
| 10 | 10 | 30 | 30 | 34...40 | 480 | KTA9-40H-40A |
| KTA7-45H Adjustable Thermal/Fixed Magnetic (13 x I_n) | | | | | | |
| 2 | 3 | 5 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A |
| 5 | 5 | 10 | 15 | 14.5...20 | 260 | KTA7-45H-20A |
| 7-1/2 | 7-1/2 | 15 | 20 | 18...25 | 325 | KTA7-45H-25A |
| 7-1/2 | 10 | 20 | 30 | 23...32 | 416 | KTA7-45H-32A |
| 10 | 15 | 30 | 40 | 32...45 | 585 | KTA7-45H-45A |



Catalog Number KTA9-32S



Catalog Number KTA9-40H



Catalog Number KTA7-45H

F KTA9 Motor Circuit Controllers

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

KTA9 UL Ratings Application Chart

| Device | Manual Controller for Group Installation ❶ | | Manual Controller as Motor Disconnect ❷ | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller ❸❹ | | |
|--|--|---------------------------------|---|---------------------------------|---------------------------------------|---------------------------------|--|---------------------------------|-----------|
| | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | | 480V | 600V | 480V | 600V | 480Y/277V | 600Y/347V | 480Y/277V | 600Y/347V |
| KTA9-32S — Standard Interrupting Capacity | | | | | | | | | |
| KTA9-32S-0.16A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-0.25A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-0.4A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-0.63A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-1.0A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-1.6A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-32S-2.5A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-32S-4.0A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-32S-6.3A | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA9-32S-10A | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA9-32S-16A | 450 | 30 | 30 | 30 | 30 | 30 | ~ | 30 | ~ |
| KTA9-32S-20A | 450 | 30 | 30 | 30 | 10 | ~ | ~ | ~ | ~ |
| KTA9-32S-25A | 450 | 30 | 18 | 30 | 5 | ~ | ~ | ~ | ~ |
| KTA9-32S-29A | 450 | 30 | 10 | 10 | ~ | ~ | ~ | ~ | ~ |
| KTA9-32S-32A | 450 | 30 | 10 | 10 | ~ | ~ | ~ | ~ | ~ |
| KTA9-40H — High Interrupting Capacity | | | | | | | | | |
| KTA9-40H-0.63A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-40H-1.0A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-40H-1.6A | 450 | 65 | 50 | 65 | 50 | 65 | 50 | 65 | 50 |
| KTA9-40H-2.5A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-40H-4.0A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-40H-6.3A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-40H-10A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-40H-16A | 450 | 30 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA9-40H-20A | 450 | 30 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA9-40H-25A | 450 | 50 | 30 | 50 | 30 | 50 | ~ | 50 | ~ |
| KTA9-40H-29A | 450 | 50 | 30 | 50 | 30 | 50 | ~ | 50 | ~ |
| KTA9-40H-32A | 450 | 50 | 30 | 30 | 18 | 30 | ~ | 30 | ~ |
| KTA9-40H-36A | 450 | 30 | 30 | 30 | 18 | 30 | ~ | 30 | ~ |
| KTA9-40H-40A | 450 | 30 | 30 | 30 | 18 | 30 | ~ | 30 | ~ |
| KTA7-45H — High Interrupting Capacity | | | | | | | | | |
| KTA7-45H-10A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-16A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-20A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-25A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-32A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-45A | 600 | 65 | 18 | 65 | 18 | 65 | ~ | 65 | ~ |

- ❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
- ❷ UL 508 Part III.
- ❸ UL 508 Part IV.
- ❹ Type E applications require use of the KT9/7-xx-TE terminal adaptor on KT9s and KT7s. Alternatively, the selection of a KT9/7 compact busbar supply block meet Type E requirements for terminal spacing.

It should be noted that the KT9/7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

F
 KT9 Motor Circuit Controllers

KTC9 Base Unit

| Maximum Horsepower | | | | Current Adjustment Range [A] | Magnetic Release Response Current [A] | Catalog Number |
|--|-------|------|-------|------------------------------|---------------------------------------|-----------------------|
| Typical Three Phase [HP] | | | | | | |
| 200V | 230V | 460V | 575V | | | |
| KTC9-40H – High Interrupting Capacity | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 3.2 | KTC9-40H-0.16A |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 5.5 | KTC9-40H-0.25A |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 8.8 | KTC9-40H-0.4A |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 14 | KTC9-40H-0.63A |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 22 | KTC9-40H-1.0A |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 35 | KTC9-40H-1.6A |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 55 | KTC9-40H-2.5A |
| 3/4 | 3/4 | 2 | 3 | 2.5...4 | 88 | KTC9-40H-4.0A |
| 1 | 1-1/2 | 3 | 5 | 4...6.3 | 139 | KTC9-40H-6.3A |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 220 | KTC9-40H-10A |
| 3 | 5 | 10 | 10 | 10...16 | 320 | KTC9-40H-16A |
| 5 | 5 | 10 | 15 | 14.5...2 | 400 | KTC9-40H-20A |
| 5 | 7-1/2 | 15 | 20 | 18...25 | 450 | KTC9-40H-25A |
| KTC7-45H — High Interrupting Capacity | | | | | | |
| 7-1/2 | 7-1/2 | 15 | 20 | 18...25 | 416 | KTC7-45H-25A |
| 7-1/2 | 10 | 20 | 30 | 23...32 | 585 | KTC7-45H-32A |



KTC9-40H

Description

The KTC9 has a fixed magnetic trip set at 18...22x the maximum value of the current adjustment range (as opposed to the KTA9s magnetic trip of approximately 14x adjustment range.) KTC9 are typically used in applications where nuisance tripping might occur, as with some high efficiency motors.

F KTC9 Motor Circuit Controllers

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTC9-40H-4.0A.

KTC9 UL Ratings Application Chart

| Device | Manual Controller for Group Installation ❶ | | Manual Controller as Motor Disconnect ❷ | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller ❸❹ | | |
|--|--|---------------------------------|---|---------------------------------|---------------------------------------|---------------------------------|--|---------------------------------|-----------|
| | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | | 480V | 600V | 480V | 600V | 480Y/277V | 600Y/347V | 480Y/277V | 600Y/347V |
| KTC9-40H — High Interrupting Capacity | | | | | | | | | |
| KTC9-40H-0.16A | 450 | 65 | 50 | 65 | 50 | 65 | 47 | 65 | 50 |
| KTC9-40H-0.25A | 450 | 65 | 50 | 65 | 50 | 65 | 47 | 65 | 50 |
| KTC9-40H-0.4A | 450 | 65 | 50 | 65 | 50 | 65 | 47 | 65 | 50 |
| KTC9-40H-0.63A | 450 | 65 | 50 | 65 | 50 | 65 | 47 | 65 | 50 |
| KTC9-40H-1.0A | 450 | 65 | 50 | 65 | 50 | 65 | 47 | 65 | 50 |
| KTC9-40H-1.6A | 450 | 65 | 50 | 65 | 50 | 65 | 30 | 65 | 50 |
| KTC9-40H-2.5A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC9-40H-4.0A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC9-40H-6.3A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC9-40H-10A | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC9-40H-16A | 450 | 65 | 30 | 65 | 18 | 65 | 30 | 65 | ~ |
| KTC9-40H-20A | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTC9-40H-25A | 450 | 50 | 30 | 50 | 30 | 50 | ~ | 50 | ~ |
| KTC7-45H — High Interrupting Capacity | | | | | | | | | |
| KTC7-45H-25A | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC7-45H-32A | 600 | 65 | 18 | 65 | 18 | 65 | 18 | 65 | 18 |

- ❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
- ❷ UL 508 Part III.
- ❸ UL 508 Part IV.
- ❹ Type E applications require use of the KT9/7-xx-TE terminal adaptor on KT9s and KT7s. Alternatively, the selection of a KT9/7 compact busbar supply block meet Type E requirements for terminal spacing.

It should be noted that the KT9/7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

F
KT9 Motor Circuit Controllers

KTB9 Base Unit ②

| Maximum Horsepower | | | | ① Rated Operational Current [A] | Magnetic Release Response Current [A] | Catalog Number |
|--|-------|------|-------|--|--|----------------|
| Typical Three Phase [HP] | | | | | | |
| 200V | 230V | 460V | 575V | | | |
| KTB9-40H – High Interrupting Capacity | | | | | | |
| ~ | ~ | ~ | ~ | 0.16 | 2.2 | KTB9-40H-0.16A |
| ~ | ~ | ~ | ~ | 0.25 | 3.5 | KTB9-40H-0.25A |
| ~ | ~ | ~ | ~ | 0.40 | 5.6 | KTB9-40H-0.4A |
| ~ | ~ | ~ | ~ | 0.63 | 8.8 | KTB9-40H-0.63A |
| ~ | ~ | 1/2 | 1/2 | 1.0 | 14 | KTB9-40H-1.0A |
| ~ | ~ | 3/4 | ~ | 1.6 | 22 | KTB9-40H-1.6A |
| 1/2 | 1/2 | 1 | 1-1/2 | 2.5 | 35 | KTB9-40H-2.5A |
| 3/4 | 3/4 | 2 | 3 | 4 | 52 | KTB9-40H-4.0A |
| 1 | 1-1/2 | 3 | 5 | 6.3 | 88 | KTB9-40H-6.3A |
| 2 | 2 | 5 | 7-1/2 | 10 | 130 | KTB9-40H-10A |
| 3 | 5 | 10 | 10 | 16 | 208 | KTB9-40H-16A |
| 5 | 5 | 10 | 15 | 20 | 280 | KTB9-40H-20A |
| 5 | 7-1/2 | 15 | 20 | 25 | 325 | KTB9-40H-25A |
| 7-1/2 | 10 | 20 | 25 | 29 | 406 | KTB9-40H-29A |
| 7-1/2 | 10 | 20 | 30 | 32 | 448 | KTB9-40H-32A |
| 10 | 10 | 25 | 30 | 36 | 432 | KTB9-40H-36A |
| 10 | 10 | 30 | 30 | 40 | 480 | KTB9-40H-40A |
| KTB7-45H — High Interrupting Capacity | | | | | | |
| 7-1/2 | 10 | 20 | 25 | 25 | 325 | KTB7-45H-25A |
| 7-1/2 | 10 | 25 | 30 | 32 | 416 | KTB7-45H-32A |
| 10 | 15 | 30 | 40 | 45 | 585 | KTB7-45H-45A |



KTB9-40H

Description

The KTB9 is designed without a thermal trip element (i.e., current adjustment range). It should be selected for applications where a separate motor overload protection device is used, such as on CLE7 Three Component Starters on page F76. Magnetic trip is approximately 14x operational current for the KTB9 (approximately 13x for the KTB7).

F

KT9 Motor Circuit Controllers

① APPLICATION NOTE: Product Selection for Heavy Duty Starting Applications using KTB9-40H and KTB7-45H Motor Circuit Controllers

The KTB9 / KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7 overload relay with selectable trip class should be used to protect the motor against overload.

In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB9 / KTB7 Motor Circuit Controller KTB9-40H and KTB7-45H.

Trip classes according to UL 508 Section 52 and IEC 60947-4-1

CLASS 10 = 1.00 CLASS 15 = 1.22 CLASS 20 = 1.42

CLASS 25 = 1.58 CLASS 30 = 1.73

The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat

resulting from long acceleration applications effecting the rated operational current of the KTB9 / KTB7.

Application Example:

Motor 480 VAC, 10 HP, I_e 14 FLA

Heavy duty starting application with start time of up to 18 seconds

Solution:

Starting time up to 18 seconds requires dimensioning for CLASS 20.

- Selection of the Motor Circuit Controller for Short Circuit Protection:

Multiply the rated operational current I_e with factor for CLASS 20:

$$I_e(20) = 14 \text{ A} \times 1.42 = 19.9 \text{ A}$$

- Select corresponding Sprecher + Schuh KTB9-40H or KTB7-45H from catalog using next higher current rating: KTB9-40H-25A

② Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – (4.2A x 0.9 = 3.78A). Select Catalog Number KTB9-40H-4.0A.

KT9 UL Ratings Application Chart

| Device | Manual Controller for Group Installation | | Manual Controller as Motor Disconnect | | Suitable for Tap Conductor Protection | | |
|---|--|---------------------------------|---------------------------------------|---------------------------------|---------------------------------------|---------------------------------|-------------|
| | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | | 480V | 600V | 480V | 600V | 480Y/277V ❶ | 600Y/347V ❶ |
| KT9-40H — High Interrupting Capacity | | | | | | | |
| KT9-40H-0.16A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-0.25A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-0.4A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-0.63A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-1.0A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-1.6A | 450 | 65 | 50 | 65 | 50 | 65 | 50 |
| KT9-40H-2.5A | 450 | 65 | 30 | 65 | 30 | 65 | 30 |
| KT9-40H-4.0A | 450 | 65 | 30 | 65 | 30 | 65 | 30 |
| KT9-40H-6.3A | 450 | 65 | 30 | 65 | 30 | 65 | 30 |
| KT9-40H-10A | 450 | 65 | 30 | 65 | 30 | 65 | 30 |
| KT9-40H-16A | 450 | 65 | 30 | 65 | 30 | 65 | 30 |
| KT9-40H-20A | 450 | 65 | 30 | 65 | 30 | 65 | ~ |
| KT9-40H-25A | 450 | 50 | 30 | 50 | 30 | 50 | ~ |
| KT9-40H-29A | 450 | 50 | 30 | 50 | 30 | 50 | ~ |
| KT9-40H-32A | 450 | 50 | 30 | 30 | 18 | 30 | ~ |
| KT9-40H-36A ❷ | 450 | 30 | 30 | 30 | 18 | 30 | ~ |
| KT9-40H-40A ❷ | 450 | 30 | 30 | 30 | 18 | 30 | ~ |
| KT9-45H — High Interrupting Capacity | | | | | | | |
| KT9-45H-25A | 600 | 65 | 30 | 65 | 30 | ~ | ~ |
| KT9-45H-32A | 600 | 65 | 30 | 65 | 30 | ~ | ~ |
| KT9-45H-45A | 600 | 65 | 18 | 65 | 18 | ~ | ~ |

F
 KT9 Motor Circuit Controllers

❶ For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

❷ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

KTV9 Base Unit

| Rated Operational Current (I _e) [A] | Current Adjustment Range [A] | Nominal Magnetic Trip Current [A] | Maximum Short Circuit Current [kA] | | Maximum Horsepower Typical ①② Three Phase [HP] | | | | Catalog Number |
|---|------------------------------|-----------------------------------|------------------------------------|--------------------|--|-------|------|------|----------------|
| | | | 480Y/277V Type E | 480V (group motor) | 200V | 230V | 460V | 575V | |
| KTV9-40H – High Interrupting Capacity | | | | | | | | | |
| 1.6 | 1.0...1.6 | 88 | 65 | 65 | ~ | ~ | 3/4 | ~ | KTV9-40H-1.6A |
| 2.5 | 1.6...2.5 | 88 | 65 | 65 | 1/2 | 1/2 | 1 | ~ | KTV9-40H-2.5A |
| 4.0 | 2.5...4.0 | 88 | 65 | 65 | 3/4 | 3/4 | 2 | ~ | KTV9-40H-4.0A |
| 6.3 | 4.0...6.3 | 88 | 65 | 65 | 1 | 1-1/2 | 3 | ~ | KTV9-40H-6.3A |
| 10 | 6.3...10 | 140 | 65 | 65 | 2 | 2 | 5 | ~ | KTV9-40H-10A |
| 16 | 10...16 | 224 | 65 | 65 | 3 | 5 | 10 | ~ | KTV9-40H-16A |
| 20 | 14.5...20 | 280 | 65 | 65 | 5 | 5 | 10 | ~ | KTV9-40H-20A |
| 25 | 18...25 | 350 | 50 | 50 | 5 | 7-1/2 | 15 | ~ | KTV9-40H-25A |
| 29 | 23...29 | 406 | 50 | 50 | 7-1/2 | 10 | 20 | ~ | KTV9-40H-29A |
| 32 | 24.5...32 | 448 | 30 | 50 | 7-1/2 | 10 | 20 | ~ | KTV9-40H-32A |
| 36 | 30...36 | 432 | 30 | 30 | 10 | 10 | 25 | ~ | KTV9-40H-36A ③ |
| 40 | 34...40 | 480 | 30 | 30 | 10 | 10 | 30 | ~ | KTV9-40H-40A ③ |



KTV9-40H

Description

The Sprecher+Schuh KTV9 series motor controllers are suitable for two types of applications under cULus listings:

- (1) as a Manual, Self-protected Motor Controller or
- (2) as a Manual Motor Controller with approval for group installation (and as a motor disconnect)

When UL/CSA listed as a manual, self-protected combination motor controller, the KTV9 provides all of the necessary NEC requirements for protection and control of individual motor branch circuits without additional protective devices (per NEC 430-52C option 6).


When KTV9 devices are applied a manual motor controllers in group installations, then NEC group installation rules state these devices must be applied per the appropriate rules, which require the use of an upstream BCPD-branch circuit protection device (per NEC 430-53C option 2).

The output frequency of the VFD must be limited to 400Hz or less to prevent thermal degradation. Various models of the KTV9 series self-protected combination motor controllers provide disconnection for motor branch circuits, branch-circuit and short-circuit protection (including magnetic protection), overload/thermal protection and manual switching.

The KTV9 self-protected combination motor controllers are current limiting and have a fixed magnetic trip. Interrupt ratings at 400V and 480V are available up to 65kAIC. The VFD output pulse-width modulation frequency must be limited to 4 kilohertz or less. The circuit breakers provide motor overload protection with a trip class 10 characteristic.

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range.
Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A.
Select Catalog Number KTV9-40H-4.0A.

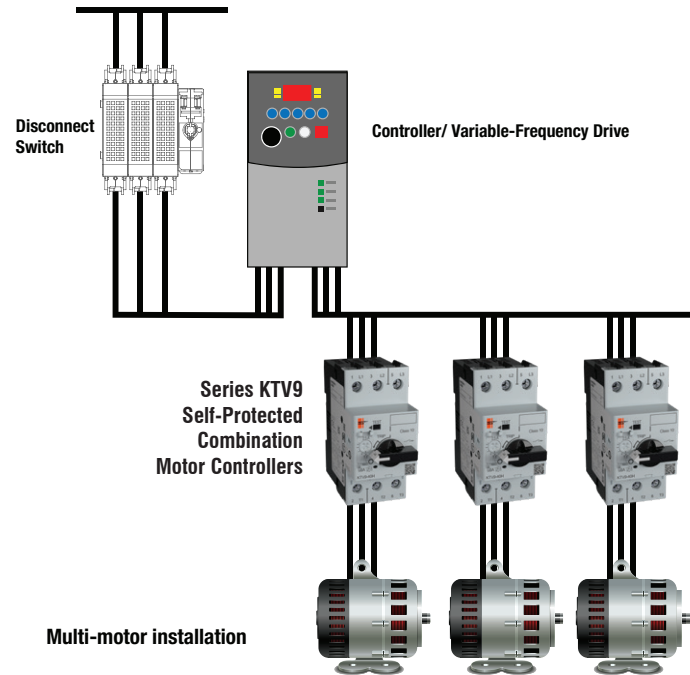

① HP ratings shown are for reference. Final selection of MPCB is determined by actual motor full load current.

② Not applicable at 575V.

③ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150mm (10 x 7 x 6 in.)

KTV9 UL Ratings Application Chart

| Device | Manual Controller for Group Installation | | | Manual Controller as Motor Disconnect | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller | |
|--|--|---------------------------------|------|---------------------------------------|------|---------------------------------------|-------------|---|-------------|
| | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | | 480V | 600V | 480V | 600V | 480Y/277V ❶ | 600Y/347V ❶ | 480Y/277V ❶ | 600Y/347V ❶ |
| KTV9-40H — High Interrupting Capacity | | | | | | | | | |
| KTV9-40H-1.6A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-2.5A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-4.0A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-6.3A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-10A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-16A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-20A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV9-40H-25A | 450 | 50 | ~ | 50 | ~ | 50 | ~ | 50 | ~ |
| KTV9-40H-29A | 450 | 50 | ~ | 50 | ~ | 50 | ~ | 50 | ~ |
| KTV9-40H-32A | 450 | 50 | ~ | 30 | ~ | 30 | ~ | 30 | ~ |
| KTV9-40H-36A ❷ | 450 | 30 | ~ | 30 | ~ | 30 | ~ | 30 | ~ |
| KTV9-40H-40A ❷ | 450 | 30 | ~ | 30 | ~ | 30 | ~ | 30 | ~ |


❶ For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

❷ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

























Accessories for KT9

| Accessory | Description | Operator Position ❶ | | | Term. No. | Type | Connection Diagram and Terminal Markings ❷ | For Use With | Catalog Number | |
|-----------|---|---------------------|-------|---------|-----------|----------|--|------------------------------|-------------------|-------------------|
| | | OFF | ON | Tripped | | | | | | |
| | | | | | | | | | | |
| | | 0 | X | 0 | 13-14 | 1 NO | | KT_9-32S KT_9-40H KTU9 | KT9-PE1-10 | |
| | | | | | | | | KT_7-45H | KT7-PE1-10 | |
| | Front-Mounted Auxiliary Contact • 1-pole or 2-pole • No additional space required • Only one per device. • KT9-PE1...250V max. • KT7-PE1...300V max. | X | 0 | X | 11-12 | 1 NC | | KT_7-45H | KT7-PE1-01 | |
| | | 0 | X | 0 | 13-14 | 1 NO | | KT_9-32S KT_9-40H KTU9 | KT9-PE1-11 | |
| | | X | 0 | X | 21-22 | 1 NC | | | | |
| | | 0 | X | 0 | 13-14 | 1 NO | | | | |
| | | | | | | | | | KT_7-45H | KT7-PE1-11 |
| | | X | 0 | X | 21-22 | 1 NC | | | | |
| | | 0 | X | 0 | 13-14 | 1 NO | | KT_9-32S KT_9-40H KTU9 | KT9-PE1-20 | |
| | | 0 | X | 0 | 23-24 | 1 NO | | | | |
| | | 0 | X | 0 | 13-14 | 1 NO | | | | |
| | | | | | | | | | KT_7-45H | KT7-PE1-20 |
| 0 | X | 0 | 23-24 | 1 NO | | | | | | |
| X | 0 | X | 11-12 | 1 NC | | KT_7-45H | KT7-PE1-02 | | | |
| X | 0 | X | 21-22 | 1 NC | | | | | | |
| | Right Side-Mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the device. • 600V max. • One per device. • Not suitable for UL489 applications | 0 | X | 0 | 33-34 | 1 NO | | KT_9-32S KT_9-40H KTU9 | KT9-PA1-20 | |
| | | 0 | X | 0 | 43-44 | 1 NO | | | | |
| | | 0 | X | 0 | 33-34 | 1 NO | | | | |
| | | | | | | | | | KT_7-45H | KT7-PA1-20 |
| | | 0 | X | 0 | 43-44 | 1 NO | | | | |
| | | X | 0 | X | 31-32 | 1 NC | | KT_9-32S KT_9-40H KTU9 | KT9-PA1-02 | |
| | | X | 0 | X | 41-42 | 1 NC | | | | |
| | | X | 0 | X | 31-32 | 1 NC | | | | |
| | | | | | | | | | KT_7-45H | KT7-PA1-02 |
| | | X | 0 | X | 41-42 | 1 NC | | | | |
| | | 0 | X | 0 | 33-34 | 1 NO | | KT_9-32S KT_9-40H KTU9 | KT9-PA1-11 | |
| | | X | 0 | X | 41-42 | 1 NC | | | | |
| 0 | X | 0 | 33-34 | 1 NO | | | | | | |
| | | | | | | | KT_7-45H | KT7-PA1-11 | | |
| X | 0 | X | 41-42 | 1 NC | | | | | | |

❶ X=Contact Closed
0=Contact Open




Accessories for KT9



| Accessory | Description | Operator Position ❶ | | | Term No. | Type | Connection Diagram and Terminal Markings ❷ | For Use With | Catalog Number |
|--|---|---------------------|------------------------------------|--|--|------------------------------|--|------------------|------------------|
| | | OFF | ON | Tripped | | | | | |
|  <p>Front-Mounted Trip Contact</p> <ul style="list-style-type: none"> • 2-pole • Indicates tripping of device • No additional space required • KT9-PEF1...250V max. • KT7-PEF1...300V max | <p>0 X 0</p> <p>0 0 X</p> <p>0 X 0</p> <p>0 0 X</p> <p>X 0 X</p> <p>0 0 X</p> <p>X 0 X</p> <p>0 0 X</p> <p>0 X 0</p> <p>X X 0</p> <p>0 0 X</p> <p>0 0 X</p> | 13-14 | NO Aux |  | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-N10 | | | |
| | | 27-28 | NO Trip (Short-Circuit & Overload) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-N01 | |
| | | 13-14 | NO Aux |  | | KT 9-32S KT 9-40H KTU9 | | | KT9-PEF1-S10-N01 |
| | | 27-28 | NO Trip (Short-Circuit & Overload) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-N01 | |
| | | 11-12 | NC Aux |  | | KT 9-32S KT 9-40H KTU9 | | | KT9-PEF1-S01-N10 |
| | | 27-28 | NO Trip (Short-Circuit & Overload) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-M10 | |
| | | 11-12 | NC Aux |  | | KT 9-32S KT 9-40H KTU9 | | | KT9-PEF1-S10-M10 |
| | | 27-28 | NO Trip (Short-Circuit & Overload) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-M10 | |
| | | 13-14 | NO Aux |  | | KT 9-32S KT 9-40H KTU9 | | | KT9-PEF1-S01-N10 |
| | | 25-26 | NC Trip (Short-Circuit & Overload) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-M10 | |
| | | 17-18 | NO Trip (Short-Circuit & Overload) |  | | KT 9-32S KT 9-40H KTU9 | | | KT9-PEF1-S10-M10 |
| | | 27-28 | NO Trip (Short-Circuit) | |  | | KT 9-32S KT 9-40H KTU9 | KT9-PEF1-S10-M10 | |
|  <p>Right Side-Mounted Trip Contact</p> <ul style="list-style-type: none"> • 2-pole • Indicates tripping of motor protector • Adds 9 mm to the width of the device • 600V max. • Only one per device • A right-side mounted auxiliary contactor may be tandem on top of this trip contact. | <p>0 0 X</p> <p>0 0 X</p> <p>0 0 X</p> <p>X X 0</p> <p>X X 0</p> <p>0 0 X</p> <p>X X 0</p> <p>X X 0</p> <p>0 0 X</p> <p>X X 0</p> <p>0 0 X</p> <p>X X 0</p> | 57-58 | NO Trip (Short-Circuit & Overload) |  | | KT 7-45H | | | KT7-PAF1-S10-M10 |
| | | 67-68 | NO Trip (Short-Circuit) | |  | | KT 7-45H | KT7-PAF1-S10-M01 | |
| | | 57-58 | NO Trip (Short-Circuit & Overload) |  | | KT 7-45H | | | KT7-PAF1-S10-M01 |
| | | 65-66 | NC Trip (Short-Circuit) | |  | | KT 7-45H | KT7-PAF1-S01/M10 | |
| | | 55-56 | NC Trip (Short-Circuit & Overload) |  | | KT 7-45H | | | KT7-PAF1-S01/M10 |
| | | 67-68 | NO Trip (Short-Circuit) | |  | | KT 7-45H | KT7-PAF1-S01-M01 | |
| | | 55-56 | NC Trip (Short-Circuit & Overload) |  | | KT 7-45H | | | KT7-PAF1-S01-M01 |
| | | 65-66 | NC Trip (Short-Circuit) | |  | | KT 7-45H | KT7-PAF1-S01-M01 | |
| | | 77-78 | NO Trip (Short-Circuit) |  | | KT 7-45H | | | KT7-PAF1-M11 |
| | | 65-66 | NC Trip (Short-Circuit) | |  | | KT 7-45H | KT7-PAF1-M11 | |

F
KT9 Motor Circuit Controllers

❶ X=Contact Closed
O=Contact Open




Accessories for KT9

| Accessory | Description | For Use With | AC Coil Voltage | | Catalog Number | |
|---|--|--|--|---|----------------------|--------------------|
| | | | 50 Hz | 60 Hz | Shunt Trip | Undervoltage |
|  | <p>Undervoltage Trip</p> <ul style="list-style-type: none"> Left-side mounted Adds 18mm to the width of the device Automatically trips MPCD/MCP when voltage falls below 35...70% <p>Shunt trip</p> <ul style="list-style-type: none"> Left-side mounted Adds 18mm to width of device. Provides remote tripping of the MPCB/MCF Maximum on time for DC operated devices: 5 sec. | KTA9 KTB9 KTC9 KTV9 KTU9 ③ | 24V | 24...28V | KT9-AA-24V | KT9-UA-24V |
| | | | 110V | 120V | KT9-AA-120V | KT9-UA-120V |
| | | | 220...230V | ~ | KT9-AA-230V | KT9-UA-230V |
| | | | ~ | 240...260V | KT9-AA-260V | KT9-UA-260V |
| | | | ~ | 277V | KT9-AA-277V | ~ |
| | | | 380...400V | ~ | KT9-AA-400V | KT9-UA-400V |
| | | | 415V | 480V | KT9-AA-480V | KT9-UA-480V |
| | | | DC Coil Voltage | | Shunt Trip | Undervoltage |
| | | | ~ | 24VDC | KT9-AA-24D | ~ |
| | | |  | <p>Undervoltage Trip</p> <ul style="list-style-type: none"> Left-side mounted Adds 18 mm to the width of the KT7 device Automatically trips motor protector when voltage falls below 35...70% <p>Shunt Trip</p> <ul style="list-style-type: none"> Left-side mounted Adds 18 mm to the width of the KT7 device Trips motor protector when voltage is applied remotely | KTA7 KTB7 KTC7 | AC Coil Voltage |
| 12V | 14V | KT7-AA-14V | | | | KT7-UA-14V |
| 21V | 24V | KT7-AA-24V | | | | KT7-UA-24V |
| 24V | 28V | KT7-AA-28V | | | | KT7-UA-28V |
| 42V | 48V | KT7-AA-48V | | | | KT7-UA-48V |
| 110V | 120V | KT7-AA-120V | | | | KT7-UA-120V |
| 110V | 127V | KT7-AA-127V | | | | KT7-UA-127V |
| 220...230V | ~ | KT7-AA-230V | | | | KT7-UA-230V |
| ~ | 240...260V | KT7-AA-240V | | | | KT7-UA-240V |
| 240V | 277V | KT7-AA-277V | | | | KT7-UA-277V |
| 380V | 460V | KT7-AA-460V | | | | KT7-UA-460V |
| 415V | 480V | KT7-AA-480V | | | | KT7-UA-480V |
| 525V | 600V | KT7-AA-600V | | | | KT7-UA-600V |
| DC Coil Voltage | | Shunt Trip | | | | Undervoltage |
| 9V DC | | KT7-AA-9D | | | | KT7-UA-9D |
| 12V DC | | KT7-AA-12D | | | | KT7-UA-12D |
| 24V DC | | KT7-AA-24D | | | | KT7-UA-24D |
| 36V DC | | KT7-AA-36D | | | | KT7-UA-36D |
| 48V DC | | KT7-AA-48D | | | | KT7-UA-48D |
| 60V DC | | KT7-AA-60D | KT7-UA-60D | | | |
| 64V DC | | KT7-AA-64D | KT7-UA-64D | | | |
| 72V DC | | KT7-AA-72D | KT7-UA-72D | | | |
| 80V DC | | KT7-AA-80D | KT7-UA-80D | | | |


F

KT9 Motor Circuit Controllers

Undervoltage Trip Connection Diagram





Shunt Trip Connection Diagram





- ① For Overload (thermal) Trip of KT9/KT7.
- ② For Short-Circuit (magnetic) Trip of KT9/KT7.
- ③ (UL 489 application up to 30 A)




Classic Handle Assembly, Type 1/4/4X/12

| Accessory | Description | Color | Legend | For use with... | Frame Size (Length) | Catalog Number |
|---|--|---------------------|---------------------------|-----------------------------|---------------------|----------------|
|  | Classic Door Coupling Handle <ul style="list-style-type: none"> For 3 padlocks 4...8 mm (5/16") diameter Type 1/3/3R/4/4X/12 and IP66 Interlock override capability Can be modified for locking in ON position Ships with coupling — order extension shaft and legend plate separately See Technical Section for mounting depth information | Gray/Black | 0 - I OFF - ON Trip | KT_9-32S, KT_9-40H, KTU9 | 65 x 65mm | KT9-HTN |
| | | | | KT_7-45H | | KT7-HTN |
| | | Red/Yellow | 0 - I OFF - ON Trip | KT_9-32S, KT_9-40H, KTU9 | 65 x 65mm | KT9-HTRY |
| | | | | KT_7-45H | | KT7-HTRY |
|  | Extension Shaft <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) See Technical Section for mounting depth information | | | KT9-HTN KT9-HTRY | 250 mm | KT9-HT |
| | | KT7-HTN KT7-HTRY | KT7-HT | | | |
| | | | | KT9-HTN KT9-HTRY | 400 mm | KT9-HTL |
| | | KT7-HTN KT7-HTRY | KT7-HTL | | | |

Contemporary Handle Assembly, Type 3R/3/4/4X

| Accessory | Description | Color | Legend | For use with... | Frame Size (Length) | Catalog Number |
|---|---|------------------|---------------------------|-----------------------------|---------------------|----------------|
|  | Contemporary Door Coupling Handle <ul style="list-style-type: none"> Screw Fixing Type 3R, 3, 12, 4, 4X, IP66 Field configurable for defeatable or non-defeatable Ships with coupling — order extension shaft and legend plate separately Requires 30mm hole for mounting For up to 2 padlocks | Black/Black | 0 - I OFF - ON Trip | KT_9-32S, KT_9-40H, KTU9 | 48.7 x 47mm | KT9-SB |
| | | | | KT_7-45H | | KT7-SB |
| | | Red/Yellow | 0 - I OFF - ON Trip | KT_9-32S, KT_9-40H, KTU9 | 48.7 x 47mm | KT9-SY |
| | | | | KT_7-45H | | KT7-SY |
|  | Extension Shaft <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) See Technical Section for mounting depth information | | | KT9-SB KT9-SY | 305mm (12") | KT9-S1 |
| | | KT7-SB KT7-SY | KT7-S1 | | | |
| | | | | KT9-SB KT9-SY | 533mm (21") | KT9-S2 |
| | | KT7-SB KT7-SY | KT7-S2 | | | |







Handle Accessories

| Accessory | Description | For use with... | Catalog Number |
|---|---|--------------------------------|----------------|
|  | Coupler <ul style="list-style-type: none"> Coupler for extension shaft Included with KT9-HTN/HTRY and KT9-SB/SY handles | KTA9-32S, KT_9-40H KTU9-40H | KT9-DNC |
|  | Extension Shaft Support <ul style="list-style-type: none"> Provides consistent alignment of the shafts with handle or door coupling Recommended for shaft lengths >200mm (7.8 in) 9mm in width and snaps on right side of devices Allows for one side-mount auxiliary | KT_9-32S, KT_9-40H, KTU9 | KT9-SHS |
| | | KT_7-45H | KT7-SHS |
|  | Legend Plate <ul style="list-style-type: none"> Marking: "Hauptschalter" and "Main Switch" (Black/Gray) Marking: "Not-Aus" and "Emergency Off" (Black/Yellow) | KT9-HT_ | KT9-HTFCN |
| | | KT7-HT_ | KT7-HTFCN |
| | | KT9-HT_ | KT9-HTFCRY |
| | | KT7-HT_ | KT7-HTFCRY |

① See Dimensions and Technical data in this section for design compatibility.


② See page F41 for assembly example and dimensions.

Accessories for KT9

| Accessory | Description | Color | For Use With | Catalog Number | |
|---|---|--|--------------------------|--------------------------|------------------|
|    | Lockable Twist Knob <ul style="list-style-type: none"> For 1 padlock 4...6 mm (3/16 in.) diameter shackle Can be locked in OFF position | Black | KT_9-32S, KT_9-40H, KTU9 | KT9-KN | |
| | | | | KT_7-45H | KT7-KN1 |
| | | Locking Tag <ul style="list-style-type: none"> Padlock attachment to the lockable handles Up to three padlocks 4...8 mm (5/16 in.) dia. shackle | Red/Yellow | KT_9-32S, KT_9-40H, KTU9 | KT9-KRY |
| | | | | | KT_7-45H |
| | | | Red | KT9-KN KT9-KRY1 | KT9-M3 |
| | | | | KT7-KN1 KT7-KRY1 | KT7-DS |
|  | Terminal Adapter for Type E Applications ⓘ <ul style="list-style-type: none"> Required for self-protected combination motor controller (Type E) application of KT_9-32S, KT_9-40H and KT_7-45H Not for use with bus bars | | KT_9-32S, KT_9-40H | KT9-40-TE | |
| | | | | KT_7-45H | KT7-45-TE |
|  | Anti-Tamper Shield <ul style="list-style-type: none"> Provides protection against inadvertent adjustment of the current setting Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10 | | KT_9-32S, KT_9-40H | KT9-CA | |
| | | | | KT_7-45H | KT7-25-CA |
|  | Screw Adaptor <ul style="list-style-type: none"> For screw fixing of motor protection circuit breaker Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10 | | KT_9-32S, KT_9-40H, KTU9 | KT9-N45 | |
| | | | | KT_7-45H | KT7-45-AS |

F KT9 Motor Circuit Controllers

Marking Systems

| Component | Description | Pkg. Qty. | Catalog Number |
|---|---|-----------|----------------|
|  | Label Sheet - 1 sheet with 105 self-adhesive paper labels each, 6 x17mm | 1 | CA7-FMS |

ⓘ Terminal Adaptors are supplied as standard on enclosed KT9 and CX7 starters, as well as, CLE- assembled products, assuring they can be used in Type E applications. Alternatively, compact busbar supply block KT9- _A2E or -A3E meet Type E requirements for terminal spacing.

Connecting Modules (for connecting KTA7, KTB7 or KTC7 into KT_9 to CA8, CA7 AC coil, or CA7 Electronic DC coil contactors) ②

| Module | Type | Description | For Connecting | Catalog Number ① |
|--------|--|--|-------------------------|----------------------|
| | ECO Connection Module 12A (IEC) , 11A (UL) | <ul style="list-style-type: none"> For DOL and reversing starters Eco-starters mount on single DIN Rail (KT_9 on DIN Rail) Electrical and mechanical interconnection of KT_9 and CA8 contactors | KT_9-32S to CA8 | KT9-32S-PEK12 |
| | ECO Connection Module 25A (IEC) , 22A (UL) | <ul style="list-style-type: none"> Eco-starters mount on single DIN Rail (KT_9 on DIN Rail) Electrical and mechanical interconnection of KT_9 MPCB and CA7 (with AC coils or 24V DC electronic coils) contactors | KT_9-32S to CA7-9...23 | KT9-32S-PEC23 |
| | ECO Connection Module 38A (IEC) , 34A (UL) | | KT_9-40H to CA7-9...23 | KT9-40H-PEC23 |
| | ECO Connection Module KT9-...-PNC23 25A (IEC), 24A (UL) KT9-...-PNC37 38A (IEC), 34A (UL) | <ul style="list-style-type: none"> Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical interconnection of KT_9 and CA7 (with AC coils) | KT_9-32S to CA7-9...23 | KT9-32S-PNC23 |
| | | | KT_9-40H to CA7-9...23 | KT9-40H-PNC23 |
| | | | KT_9-40H to CA7-30...37 | KT9-40H-PNC37 |
| | Connecting Modules — 25 and 45 A | <ul style="list-style-type: none"> Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical Interconnection of KT_7-45H and CA7 (with AC coils) | KT_7-45H to CA7-30...37 | KT7-45H-PNC37 |
| | KT_7-45H to CA7-43 | | KT7-45H-PNC43 | |

Coil Modules

| | | | | |
|--|-------------------------------|---|-------------|----------------------|
| | Coil Extension Modules | <ul style="list-style-type: none"> Provides access to coil terminals on 3-component starters | CA7-9...23 | KT9-32S-PSC23 |
| | | | CA7-30...55 | KT9-80H-PSC43 |
| | | | CA7-30...55 | KT7-45H-PSC43 |

Type W Mounting Modules

| Module | Description | Width (mm) | Catalog Number |
|--------|---|------------|----------------|
| | Short Mounting Module - Requires Connecting Module from tables above <ul style="list-style-type: none"> Provides support for KT7 + CA7 or CA8 Top rail is specifically designed for KT7 Bottom rail is movable for easy assembly and disassembly Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts 228 mm long | 45 | W-32489 |
| | | 54 | W-32490 |
| | Long Mounting Module - See Section D for Connecting Modules <ul style="list-style-type: none"> Provides support for KT7 + PCS Softstarter, CA7 + PCS Softstarter or KTB7 + CA7+CEP7 Top rail is specifically designed for KT7 Bottom rail is movable for easy assembly and disassembly Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts 283 mm long | 45 | W-32496 |
| | | 54 | W-32497 |

① cURus Approved (File # E33916).

② Not for use with KTU9 Circuit Breakers

Compact Busbar System for KT_9 Motor Controllers ①

| Accessory | Description | For Use With | Catalog Number |
|-------------------------------------|--|--------------------------|---|
| | <p>Compact Busbar — 45 mm Spacing (Rated 64 A)</p> <ul style="list-style-type: none"> For use with front-mounted auxiliary contact on KT_9 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers | KTA9-32S, KT_9-40H, KTU9 | <p>KT9-40-DB-45-2</p> <p>KT9-40-DB-45-3</p> <p>KT9-40-DB-45-4</p> <p>KT9-40-DB-45-5</p> |
| | <p>Compact Busbar — 54 mm Spacing (Rated 64 A)</p> <ul style="list-style-type: none"> For use with side-mounted auxiliary contact on KT_9 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers | KTA9-32S, KT_9-40H, KTU9 | <p>KT9-40-DB-54-2</p> <p>KT9-40-DB-54-3</p> <p>KT9-40-DB-54-4</p> <p>KT9-40-DB-54-5</p> |
| | <p>Compact Busbar — 54mm Spacing (Rated 115 A)</p> <ul style="list-style-type: none"> For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers | KT_7-45H | <p>KT7-45-DB-54-2</p> <p>KT7-45-DB-54-3</p> <p>KT7-45-DB-54-4</p> |
| | <p>Compact Busbar — 63 mm Spacing (Rated 115 A)</p> <ul style="list-style-type: none"> For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers | KT_7-45H | <p>KT7-45-DB-63-2</p> <p>KT7-45-DB-63-3</p> <p>KT7-45-DB-63-4</p> |
| <p>KTA9-32S to 40H KT9-KBH</p> | <p>Top Hat Rail Adapter — 10 mm</p> <ul style="list-style-type: none"> Adjust the depth of the KTA9-32S to the KT_9-40H Allows the use of compact busbars across both frame sizes Must be ordered in multiples of 10 Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10 | KTA9-32S | KT9-KBH |
| <p>KT9-40-A2E</p> | <p>Feeder Block for Compact Busbar</p> <ul style="list-style-type: none"> Supply of compact busbars Increases terminal capacity | KTA9-32S | KT9-40-A2E |
| | | KT_7-45H | KT7-45-A2E |
| <p>KT9-40-A3E</p> | <p>Feeder Terminal for Compact Busbar</p> <ul style="list-style-type: none"> For supply of compact busbars Top feed — overlaps compact busbar Meets UL Type E spacing requirements | KTA9-32S, KT_9-40H | KT9-40-A3E |
| | | KT_7-45H | KT7-45-A3E |
| | <p>Terminal Cover</p> <ul style="list-style-type: none"> For covering of unused compact bus bar terminals IP2X finger protection Must be ordered in multiples of 10 Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10 | KT9-40-DB | KT9-40-DBA |
| | | KT7-45-DB | KT7-45-DBA |

F KT9 Motor Circuit Controllers

① UL Approved (File #E33916); CSA Approved (File #13908).

General Data








| Attribute | KT9-32S | KT9-40H | KT7-45H |
|---|--|--|----------------------------|
| Standards compliance | IEC | IEC/EN 60947-2, IEC/EN 60947-4-1 | |
| | cULus ① | UL 60947-4-1, CSA C22.2, No. 60947-4-1 | |
| Certifications | Regional ① | CCC, EAC, CE, IEC, cULus Listed | cULus Listed, CCC, EAC, CE |
| Rated Insulation Voltage U_i | IEC [V] | 690 | |
| | UL/CSA [V] | 600 | |
| Rated Impulse Withstand Voltage U_{imp} | Pollution degree | 3 | |
| | Main circuits U_{imp} /Overvoltage Category | 6 kV/III, 8 kV (Disconnect) | |
| | Auxiliary circuits U_{imp} /Overvoltage Category | 6 kV/III | |
| Rated Frequency | [Hz] | 45-65 | |
| Utilization Category | IEC 60947-2 (Circuit breaker) | A | |
| | IEC 60947-4-1 (Motor starter) | AC-3 | |
| Life Span | Mechanical [operations] | 100,000 | 30,000 |
| | Electrical (I_e max.) [operations] | 100,000 | 30,000 |
| Switching Frequency | [operations/hours] | max. 25 | |
| Ambient Temperature | Storage [°C (°F)] | -40...+85°C (-40-185°F) | |
| | Operation [°C (°F)] | -25...+70°C (-13-158°F) | |
| Climatic resistance | Operating Humidity/Moisture heat (60068-2-3) | 5...95% Non-condensing | |
| Site Altitude | [m] | to 2000 N.N. (6561 ft) | |
| Protection Class | | IP2X from all directions | |
| Resistance to Shock, Transport (60068-2-27) | ON | 15 G/11 ms | |
| | OFF | 30 G/11 ms | |
| Resistance to Vibration, Operation (60068-2-6) | | 5 G | |
| Rated Thermal Current I_{th} | up to 40 °C (104 °F) ambient temperature [A] | 0.1...32 | 0.63...40 |
| | up to 60 °C (140 °F) ambient temperature [A] | 0.1...32 | 0.63...40 |
| Rated Supply Current I_e | [A] | 0.1...32 | 0.63...40 |
| Dependence on Temperature | 40 °C (104 °F) [A] | no reduction | |
| | 50 °C (122 °F) [A] | no reduction | |
| | 60 °C (140 °F) [A] | no reduction | |
| | 70 °C (158 °F) [A] | 15% current reduction of the upper rated current I_e | |
| Overload Protection Characteristics | | IEC 60947-4-1 Motor protection (except Cat. Nos. KTB9-40H, KTB7-45H) | |
| Ambient Temperature Compensation | [°C (°F)] | -25...+60 (-13...+140) | |
| Phase-loss Protection | | Differential release | |
| Trip class | | 10 (except Cat. Nos. KTB9-40H, KTB7-45H) fixed setting | |
| Magnetic Release | | fixed setting | |
| Release current (±20%) | for KTA9, KTB9 [A] | 14 x I_e max. ② | 13 x I_e max |
| | for KTA9, KTB9 36A, 40A [A] | 12 x I_e max. ② | ~ |
| | for KTC9 [A] | 18...22 x I_e max. ③ | |
| Total Power loss P_v | Circuit Breaker at rated load/operating temp. [W] | 4...11 | 4...14 |
| Main Disconnect Switch Application | | Yes, with accessories | |
| Application Conditions | | KT_9-40H...36A, -40A: Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in). For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements KT9 manual starters are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments. | |

① cULus Listing in process.

② I_e max. = maximum values of setting ranges fixed magnetic setting for KTV9-40H; see ratings.

③ I_e max. = maximum values of setting ranges; see ratings.

MPCB Connecting Characteristics

| Connection | No. of conductors | KTA9-32S | KT_9-40H | KT_7-45H |
|--|-------------------|---|--|---|
| Power Terminals | |  |  |  |
| Terminal Type | | Screw Clamp up to 16 A, M4 | Screw Clamp greater than 16 A, M4 | |
| Screwdriver | | Pozidriv No.2/Blade No.3 | Pozidriv No.2/Blade No.3 | Pozidrive No. 2/Blade No. 3 |
| Solid or stranded  | 1 conductor | 1...6 mm ² | 1.5...10 mm ² | 2.5...25 mm ² |
| | 2 conductor | 1...2.5 mm ² 2.5...6 mm ² | 1.5...4 mm ² 4...10 mm ² | 2.5...25 mm ² |
| Flexible with ferrule (end sleeve)  | 1 conductor | 1...6 mm ² | 1.5...10 mm ² | 2.5...25 mm ² |
| | 2 conductor | 1...2.5 mm ² 2.5...4 mm ² | 1.5...4 mm ² 4...10 mm ² | 2.5...25 mm ² |
| Finely stranded  | 1 conductor | 1.5...6 mm ² | 2.5...10 mm ² | 16...25 mm ² |
| | 2 conductor | 1.5...4 mm ² 2.5...6 mm ² | 2.5...6 mm ² 4...10 mm ² | 16...25 mm ² |
| Cross section per UL/CSA solid, stranded  | 1 conductor | No. 14...10 AWG | No. 14...8 AWG | No.14...8 |
| | 2 conductor | No. 14...10 AWG | No. 14...10 AWG No. 12...8 AWG | No.14...8 |
| Stripping length | | 10 mm (0.39 in.) | 10 mm (0.39 in.) | 10 mm (0.39 in.) |
| Tightening torque | [Nm]/[lb-in.] | 2...2.5 / 18...22 | 2...2.5/18...22 | 3...3.5 / 27...30 |

Approval Comparison



KTA9-32S



KT_9-40H



KT_7-45H

Features and Approvals

| | | | |
|--|-----------------|-------------------------------|-----------------|
| Max. Current I_n | 32 A | 32 A | 45 A |
| Current Rating | 0.1...32 A | 0.63...40A | 6.3...45 A |
| Short Circuit Protection | ✓ | ✓ | ✓ |
| Standard magnetic Trip | ✓ | ✓ | ✓ |
| High Magnetic Trip | ✓ | ✓ | ✓ |
| Magnetic Only Trip (MCP) | ✓ | ✓ | ✓ |
| Overload Protection | ✓ | ✓ | ✓ |
| Trip Class | ✓ | ✓ | ✓ |
| Application at output of VFD (multi-motor) | | ✓ (KTV9) | ✓ |
| Standards Compliance: | | | |
| CSA22.2, No. 14 | ✓ | ✓ | ✓ |
| UL508 (Group Installation) | ✓ (see ratings) | ✓ (see ratings) | ✓ (see ratings) |
| UL508 Manual, Self-protected (Type E) | ✓ (see ratings) | ✓ (see ratings) | ✓ (see ratings) |
| UL508 (Overload Protection) | ✓ | ✓ | ✓ |
| IEC60947-1,-2 | ✓ | ✓ | ✓ |
| IEC60947-4-1 | ✓ | ✓ | ✓ |
| CE | ✓ | ✓ | ✓ |
| ATEX (IEC60079-14) | ✓ (up to 25 A) | ✓ (up to 25 A except KTV9) | ✓ |
| CCC | ✓ (up to 25 A) | ✓ (up to 25 A except KTV9) | ✓ |
| Accessories | | | |
| External Rotary Operator | ✓ | ✓ | ✓ |
| Auxiliary Contacts | ✓ | ✓ | ✓ |
| Trip Indicator Contacts | ✓ | ✓ | ✓ |

Auxiliary Contact Specifications – for KTA9-32S... and KT_9-40H devices







| Attribute | | Front-mounted Auxiliary Contacts Cat. Nos. KT9-PE1, -PEF1/ -PEF1-S10M10 | | Right Side-mounted Auxiliary Contacts Cat. No. KT9-PA1 |
|--|-------------------------------------|--|--|---|
| Rated Thermal Current I_{th} | at 40°C (104°F) ambient temperature | [A] | 5 | 10 |
| | at 60°C (140°F) ambient temperature | [A] | 4 | 6 |
| Back-up Fuses gG, gL | | [A] | 10 | 10 |
| General Use current | | [A] | 5 | 10 |
| Rated insulation voltage U_i | IEC | [V] | 250 | 690 |
| | UL/CSA | [V] | 240 | 600 |
| Contact rating code designation (UL/CSA) | | AC | B300 | A600 |
| | | DC | R300 | Q600 |
| Rated Supply Current I_e | AC-15 | 24V [A] | 4 | 6 |
| | | 120V [A] | 3 | 5 |
| | | 240V [A] | 1.5 | 3 |
| | | 415V [A] | - | 2 |
| | | 690V [A] | - | 1 |
| | DC-13 | 24V [A] | 1.2 | 2 |
| | | 125V [A] | 0.22 | 0.55 |
| | | 250V [A] | 0.11 | 0.27 |
| | | 400V [A] | - | 0.15 |
| | | 500V [A] | - | 0.13 |
| Type of Terminals | | | | |
| Recommended Screwdriver | | Poqidrive No. 2/Blade No. 3 | | Pozidrive No. 2/Blade No. 3 |
| | Flexible with insulated ferrule | 1 or 2 conductors | 0.5...1.5 mm ² /No. 18...14 AWG | 0.5...2.5 mm ² /No. 18...14 AWG |
| | Flexible | 1 or 2 conductors | 0.5...1.5 mm ² /No. 18...14 AWG | 0.75...2.5 mm ² /No. 18...14 AWG |
| | Stranded per UL/CSA | 1 or 2 conductors | 0.5...1.5 mm ² /No. 18...14 AWG | 0.75...2.5 mm ² /No. 18...14 AWG |
| | Solid | 1 or 2 conductors | 0.5...1.5 mm ² /No. 18...14 AWG | 0.5...2.5 mm ² /No. 18...14 AWG |
| Conductor steps | | Max 2 conductor steps allowed | | Max 2 conductor steps allowed |
| Tightening torque | | 1...1.2 N•m/8.9...10.6 lb•in | | 1...1.2 N•m/8.9...10.6 lb•in/1...1.2 |

Auxiliary Contact Specifications – for KT_7-45H... devices

| Attribute | | Front-mounted Auxiliary Contacts Cat. Nos. 140M-C-AFA..., 140M-C-AFAR... | | Right Side-mounted Auxiliary Contacts Cat. Nos. 140M-C-ASA..., 140M-C-ASAR... |
|--|-------------------------------------|---|---|--|
| Rated Thermal Current I_{th} | at 40°C (104°F) ambient temperature | [A] | 5 | 10 |
| | at 60°C (140°F) ambient temperature | [A] | 4 | 6 |
| Back-up Fuses gG, gL | | [A] | 10 | 10 |
| Contact rating code designation (UL/CSA) | | AC | B300 | A600 |
| | | DC | R300 | Q600 |
| Rated Supply Current I_e | AC-15 | 24V [A] | 4 | 6 |
| | | 120V [A] | 3 | 5 |
| | | 240V [A] | 1.5 | 3 |
| | | 415V [A] | - | 2 |
| | | 690V [A] | - | 0.7 |
| | DC-13 | 24V [A] | 2 | 2 |
| | | 120V [A] | 0.5 | 0.5 |
| | | 240V [A] | 0.25 | 0.25 |
| | | 415V [A] | - | 0.15 |
| | | | | |
| Type of Terminals | | | | |
| Recommended Screwdriver | | Poqidriv No. 2/Blade No.3 | | Pozidriv No. 2/Blade No.3 |
| | Flexible with insulated ferrule | 1 conductor | 0.5...1.5 mm ² | 0.5...2.5 mm ² |
| | | 2 conductors | 0.75...1.5 mm ² | 0.75...2.5 mm ² |
| | Stranded per UL/CSA | 1 or 2 conductors | 0.75...1.5 mm ² /No. 18...14 AWG | 0.75...2.5 mm ² /No. 18...14 AWG |
| | Solid | 1 or 2 conductors | 0.75...1.5 mm ² /No. 18...14 AWG | 0.75...2.5 mm ² /No. 18...14 AWG |
| Tightening torque | | 1...1.2 N•m/8.9...10.6 lb•in | | 1...1.2 N•m/8.9...10.6 lb•in/1...1.2 |






F
KT9 Motor Circuit Controllers

Undervoltage and Shunt Trip Specifications—For KTA9-32S... and KT_9-40H... devices

| | | Undervoltage Trip for Left-Side Mounting Cat. Number KT9-UA-* | | Shunt Trip for Left-Side Mounting Cat. Number KT9-AA-* | |
|---------------------------------|--|---|-----------|---|--|
| Actuating Voltage | Pull-in | 0.85...1.1 x U _s | | 0.7...1.1 x U _s | |
| | Drop-out | 0.7...0.35 x U _s | | 0.7...1.1 x U _s | |
| Rated AC Control Voltage | KT9-UA-24V | 50 Hz | 24 | - | |
| | | 60 Hz | 28 | - | |
| | KT9-UA-120V | 50 Hz | 110 | - | |
| | | 60 Hz | 120 | - | |
| | KT9-UA-230V | 50 Hz | 220...230 | - | |
| | | 60 Hz | - | - | |
| | KT9-UA-260V | 50 Hz | - | - | |
| | | 60 Hz | 240...260 | - | |
| | KT9-UA-400V | 50 Hz | 380...400 | - | |
| | | 60 Hz | 440...460 | - | |
| | KT9-UA-480V | 50 Hz | 415 | - | |
| | | 60 Hz | 480 | - | |
| | KT9-AA-24V | 50 Hz | - | 24 | |
| | | 60 Hz | - | 24...28 | |
| | KT9-AA-120V | 50 Hz | - | 110 | |
| | | 60 Hz | - | 120 | |
| | KT9-AA-230V | 50 Hz | - | 220...230 | |
| | | 60 Hz | - | - | |
| | KT9-AA-260V | 50 Hz | - | - | |
| | | 60 Hz | - | 240...260 | |
| KT9-AA-277V | 50 Hz | - | 240 | | |
| | 60 Hz | - | 277 | | |
| KT9-AA-400V | 50 Hz | - | 380...400 | | |
| | 60 Hz | - | 440...460 | | |
| KT9-AA-480V | 50 Hz | - | 415 | | |
| | 60 Hz | - | 480 | | |
| On-time | | Continuous duty | | Continuous duty | |
| Coil consumption | | 8.5/8 4/2 | | 8.5/8 4/2 | |
| Rated DC Control Voltage | KT9-AA-24D | - | | 24 | |
| | On-time | - | | Max 5 s | |
| | Coil consumption Pick-up | - | | 50 | |
| Type of Terminals | |  | |  | |
| Recommended screwdriver | | POZIDRIVE No. 2/BLADE No. 3 | | POZIDRIVE No. 2/BLADE No. 3 | |
| Flexible with insulated ferrule |  1 or 2 conductor | 0.5...2.5 mm ² / No. 18...14 AWG | | 0.5...2.5 mm ² / No. 18...14 AWG | |
| Flexible |  1 or 2 conductor | 0.75...2.5 mm ² / No. 18...14 AWG | | 0.75...2.5 mm ² / No. 18...14 AWG | |
| Stranded per UL/CSA |  1 or 2 conductor | 0.75...2.5 mm ² / No. 18...14 AWG | | 0.75...2.5 mm ² / No. 18...14 AWG | |
| Solid |  1 or 2 conductor | 0.5...2.5 mm ² / No. 18...14 AWG | | 0.5...2.5 mm ² / No. 18...14 AWG | |
| Conductor steps | | Max 2 conductor steps allowed | | Max 2 conductor steps allowed | |
| Tightening torque | | 1...1.2 N•m/8.9...10.6 LB•IN | | 1...1.2 N•m/8.9...10.6 LB•IN 1...1.2 | |


F KT9 Motor Circuit Controllers

Undervoltage and Shunt Trip Specifications – For KT_7-45H... devices

| Attribute | | Undervoltage Trip for Left-Side Mounting Cat. Number KT7-UA-* | | Shunt Trip for Left-Side Mounting Cat. Number KT7-AA-* | | |
|---|---------------------------------|--|---|---|---|--|
| Actuating Voltage | Pick-up | [V] | 0.85...1.1 x U _s | 0.7...1.1 x U _s | | |
| | Drop-out | [V] | 0.7...0.35 x U _s | 0.7...1.1 x U _s | | |
| Rated AC Control Voltage | Min | 50 Hz | [V AC] | 21 | 21 | |
| | | 60 Hz | [V AC] | 24 | 24 | |
| | Max | 60 Hz | [V AC] | 600 | 600 | |
| | | On-time | Continuous duty | | Continuous duty | |
| Coil consumption | Pick-up | [VA/W] | 8.5/8 | 8.5/8 | | |
| | Hold-in | [VA/W] | 4/2 | 4/2 | | |
| Type of Terminals | | |  | |  | |
| Recommended Screwdriver | | | Poizdrive No. 2/Blade No. 3 | | Poizdrive No. 2/Blade No. 3 | |
|  | Flexible with insulated ferrule | 1 conductor | 0.5...2.5 mm ² | | 0.5...2.5 mm ² | |
| | | 2 conductors | 0.75...2.5 mm ² | | 0.75...2.5 mm ² | |
|  | Stranded per UL/CSA | 1 or 2 conductors | 0.75...2.5 mm ² /No. 18...14 AWG | | 0.75...2.5 mm ² /No. 18...14 AWG | |
|  | Solid | 1 or 2 conductors | 0.75...2.5 mm ² /No. 18...14 AWG | | 0.75...2.5 mm ² /No. 18...14 AWG | |
| Conductor steps | | | 1.2...1.5 N•m/10.6...13.3 lb•in | | 1.2...1.5 N•m/10.6...13.3 lb•in | |

Time-Current Characteristic

KT9 KTA7 Motor Protection (for KTV9, see ratings)

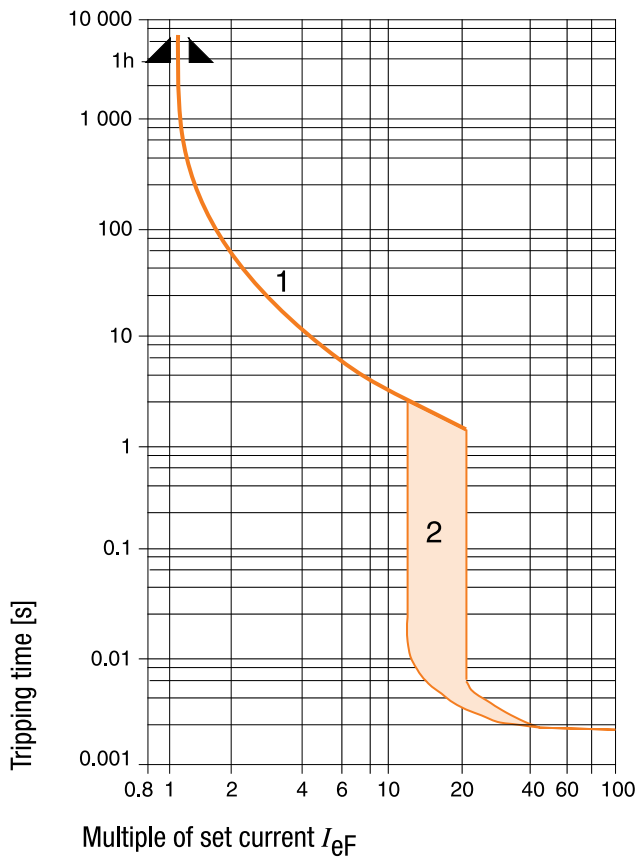

1. Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20°C starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single-phasing. The overload characteristic is also valid for transformer protection.

2. Magnetic Release Trip Current



The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13...14 times the maximum value of setting range (high inrush protection -20 x I_o maximum). At a lower overload setting the magnetic trip is correspondingly higher.

Current Setting I_{ef}

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g., reduced I_o for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current I_o of the motor.

F KT9 Motor Circuit Controllers



Cut-off Current ❶

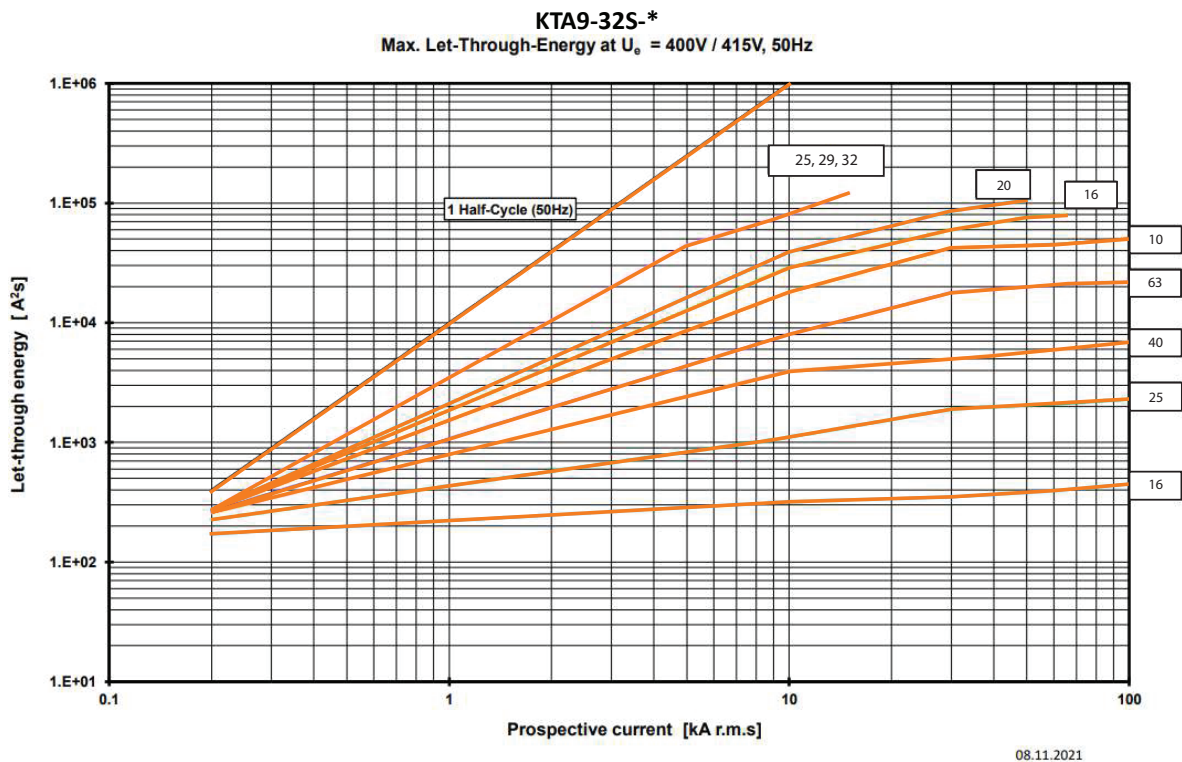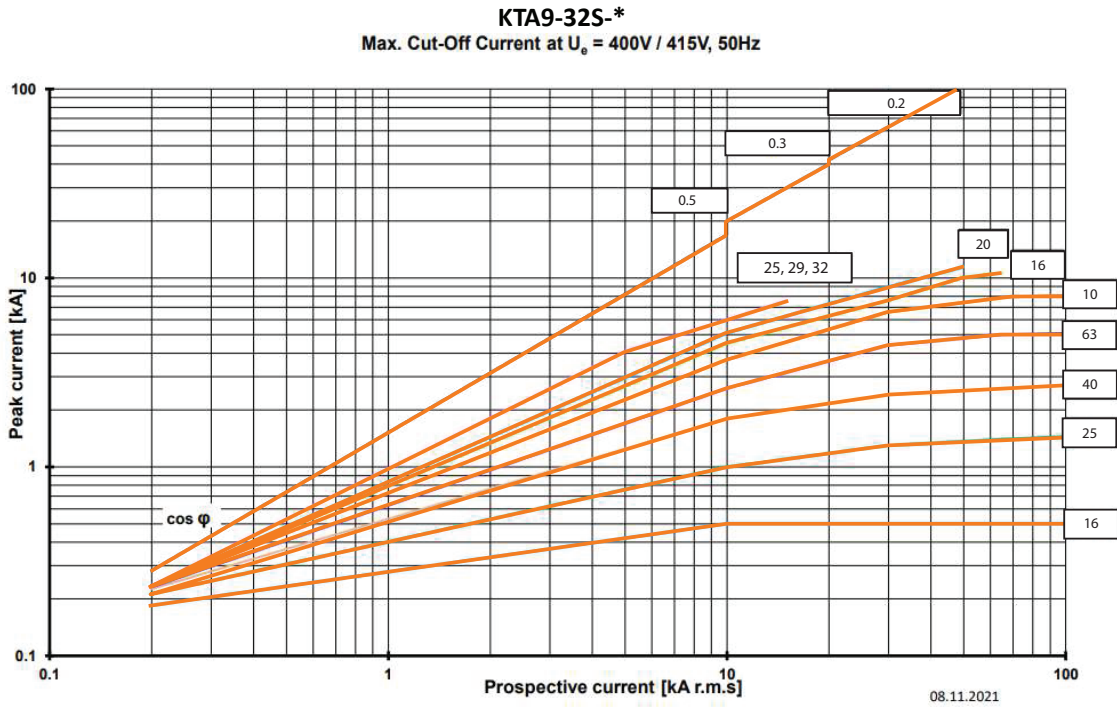

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.

Cut-off Current ①


F KT9 Motor Circuit Controllers

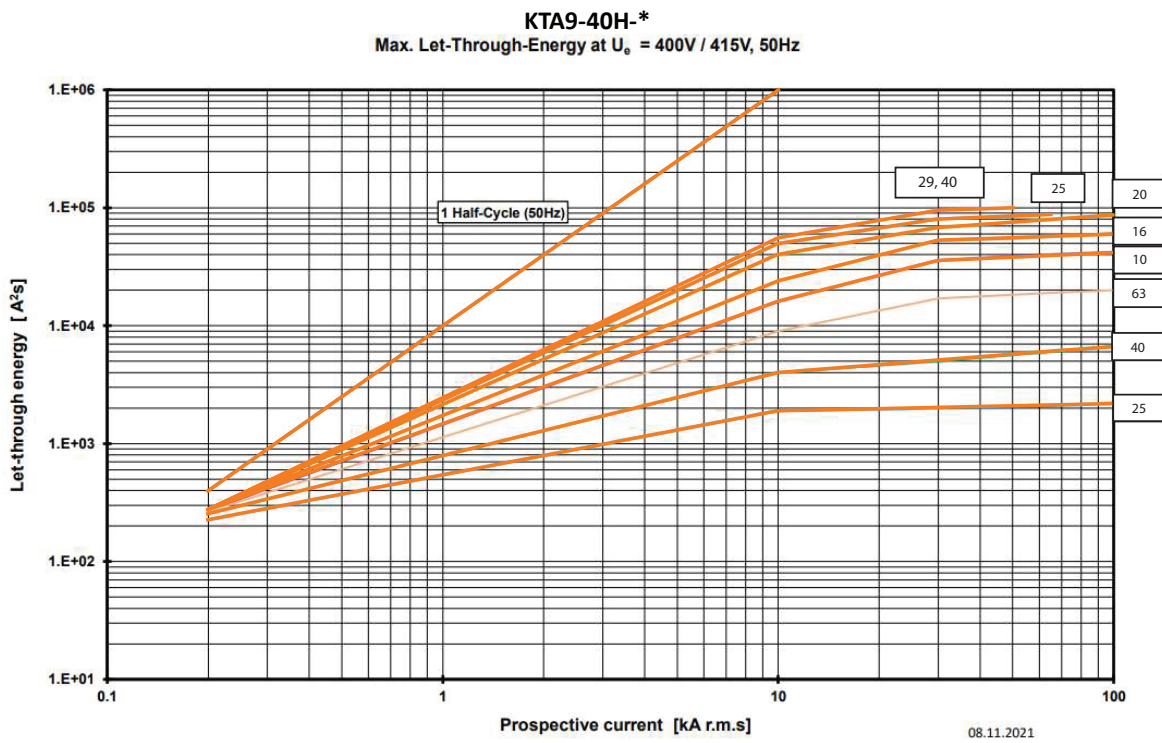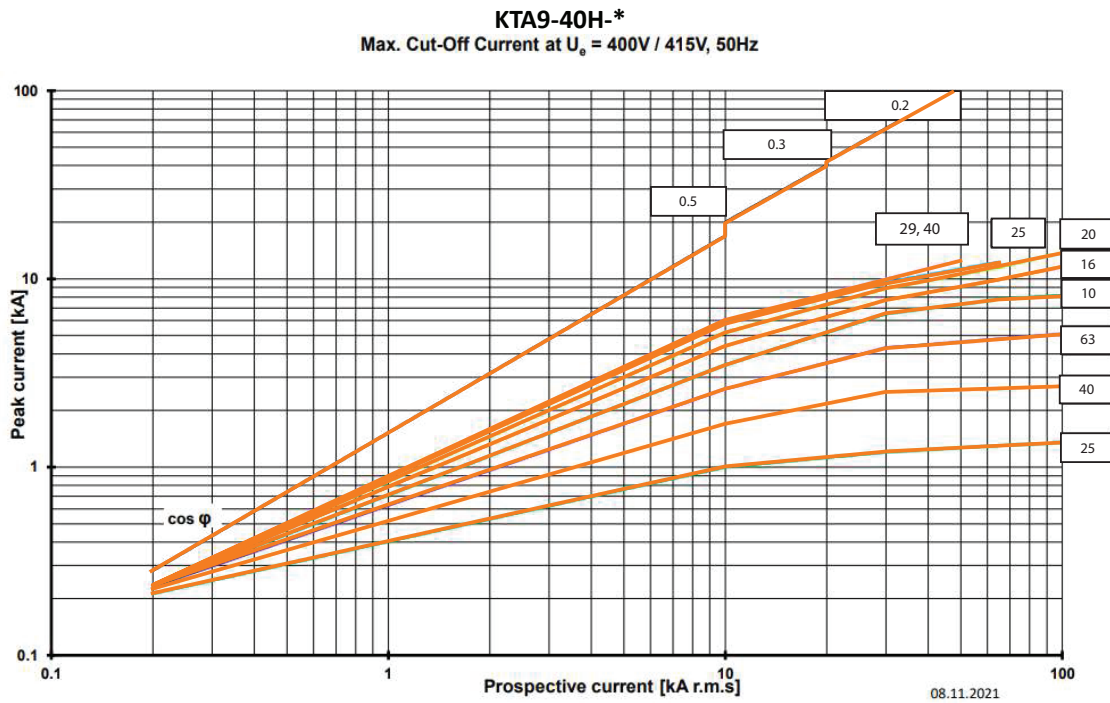


① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.

Approximate Dimensions

KT_9 Devices and Accessories – Mounting Orientation

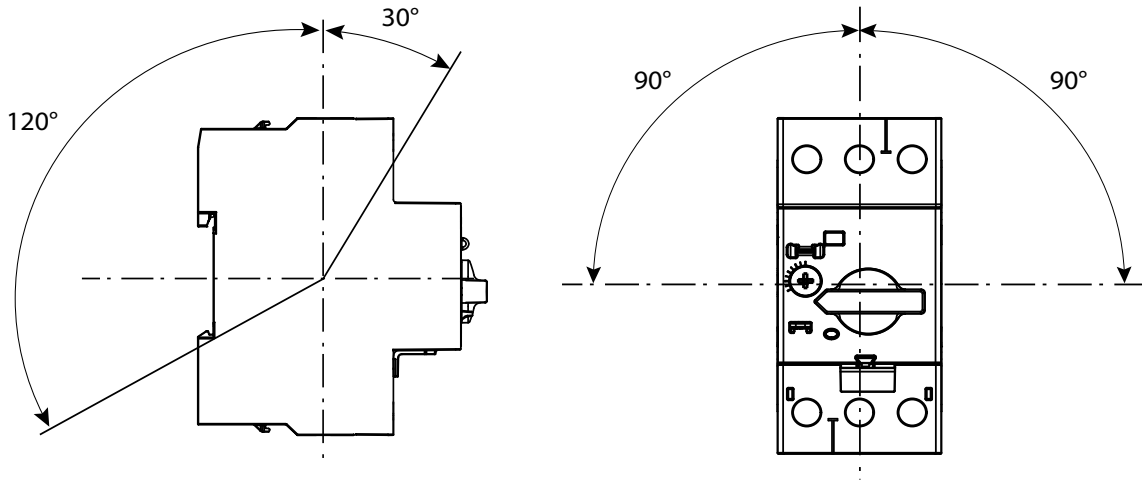


KT_9 Devices and Accessories – Spacing Requirements

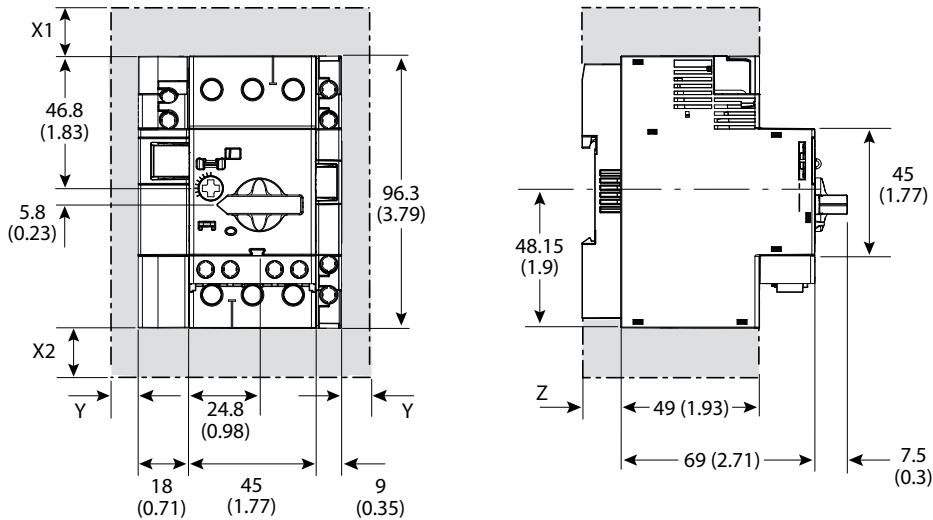


| Frame Size | Voltage [V AC] | Minimum Distance to Grounded Parts or Walls [mm (in)] | | | Z |
|-----------------------|----------------|---|--------------|-------------|--------------|
| | | X1 | X2 | Y | |
| KTA9-32S (C-Frame) | 400 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) | 7.5 (19/64) |
| | 500 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) | |
| | 690 | 50 (1-31/32) | 50 (1-31/32) | 30 (1-3/16) | |
| KT_9-40H (D-Frame) | 400 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) | 13.5 (17/32) |
| | 500 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) | |
| | 690 | 50 (1-31/32) | 50 (1-31/32) | 30 (1-3/16) | |

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprechersschuh.com>.

Motor Protection Circuit Breaker (C-Frame), Cat. No. KTA9-32S...

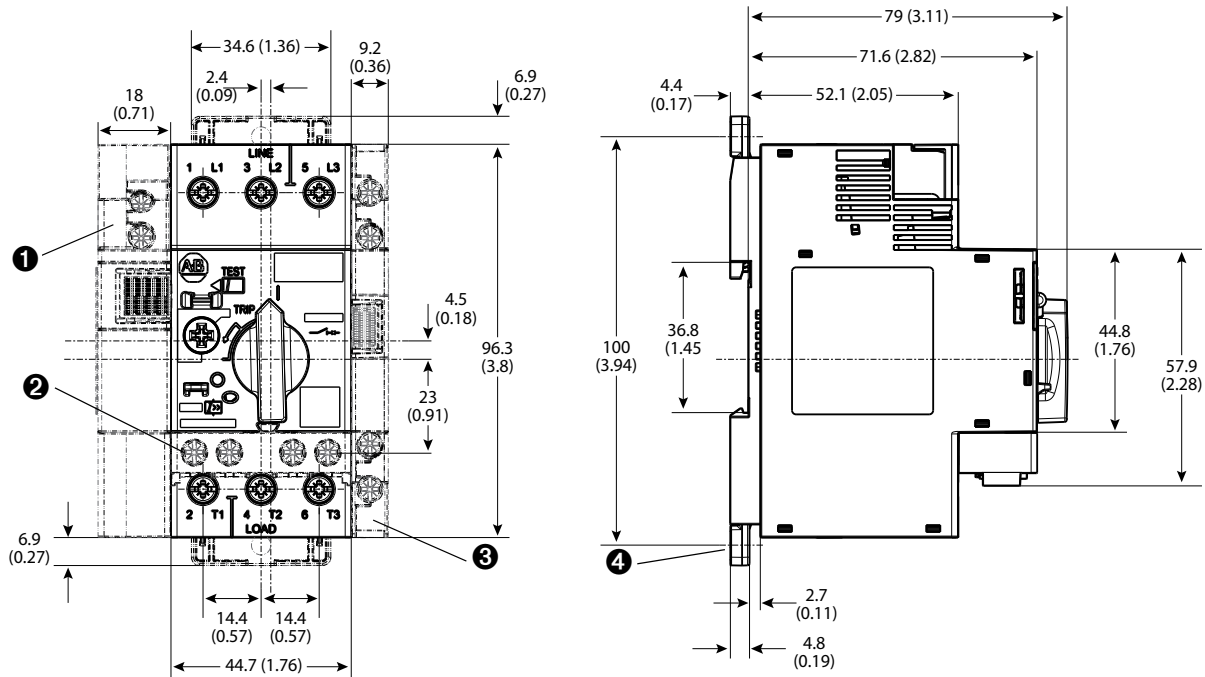


Motor Protection Circuit Breaker (D-Frame), Cat. No. KT_9-40H...

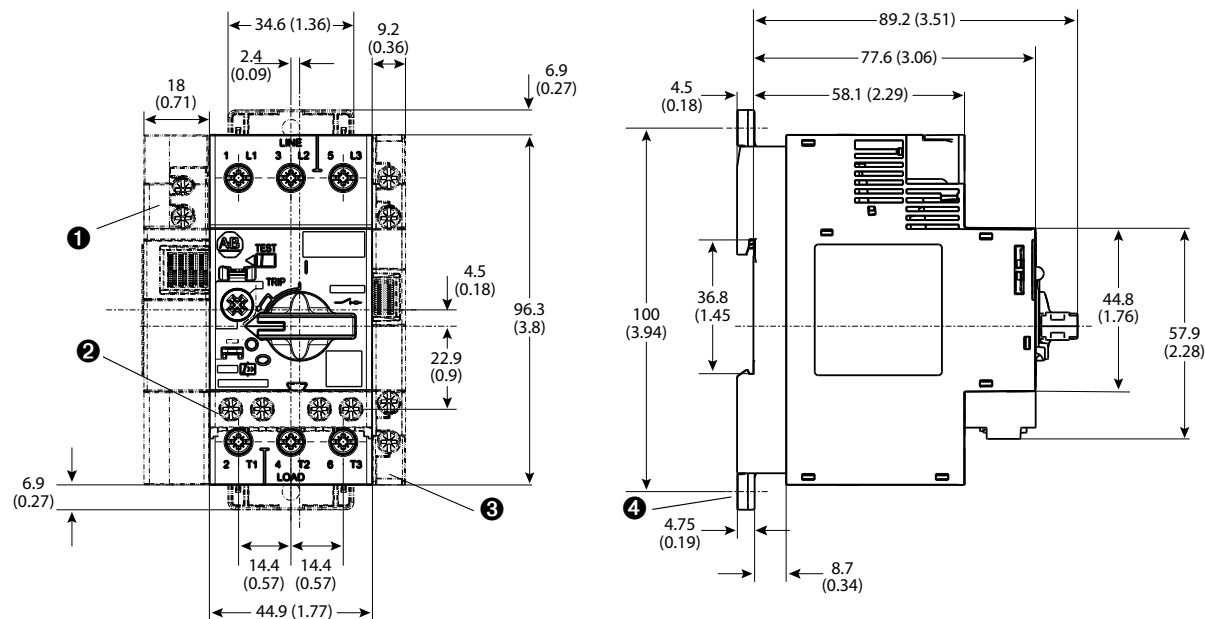

- ❶ Undervoltage/shunt trip
- ❷ Auxiliary contact (front mounted)
- ❸ Auxiliary contact (side mounted)
- ❹ Screw mounting adapter



F
KT9 Motor Circuit Controllers

Feeder Terminal for Compact Busbar, Cat. No. KT9-40-A3E

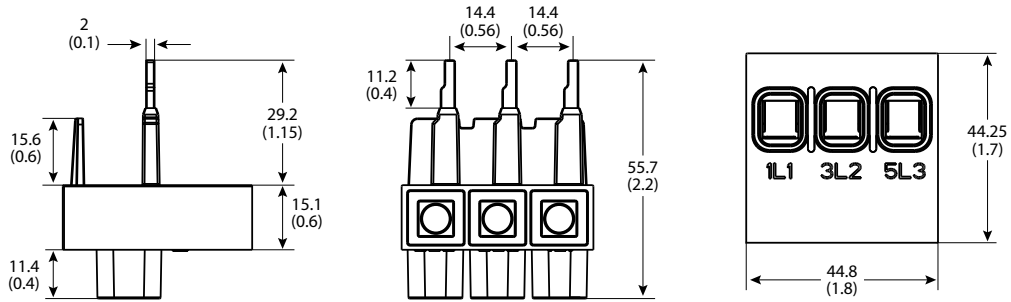


Terminal Cover, Cat. No. KT9-40-DBA


Supply Block, Cat. No. KT9-40-A2E

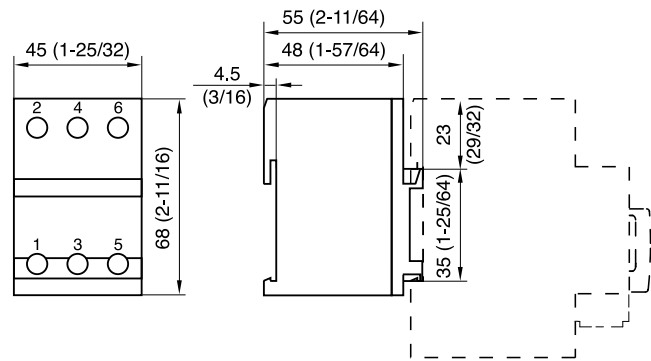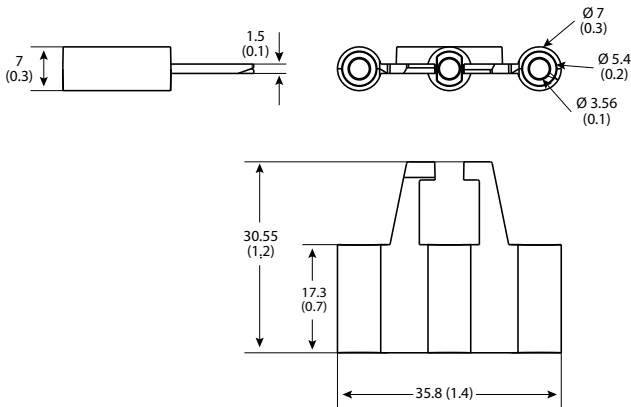


KT9-40-TE Type E adapter on Cat. No. KTA9-32S and KT_9-40H...

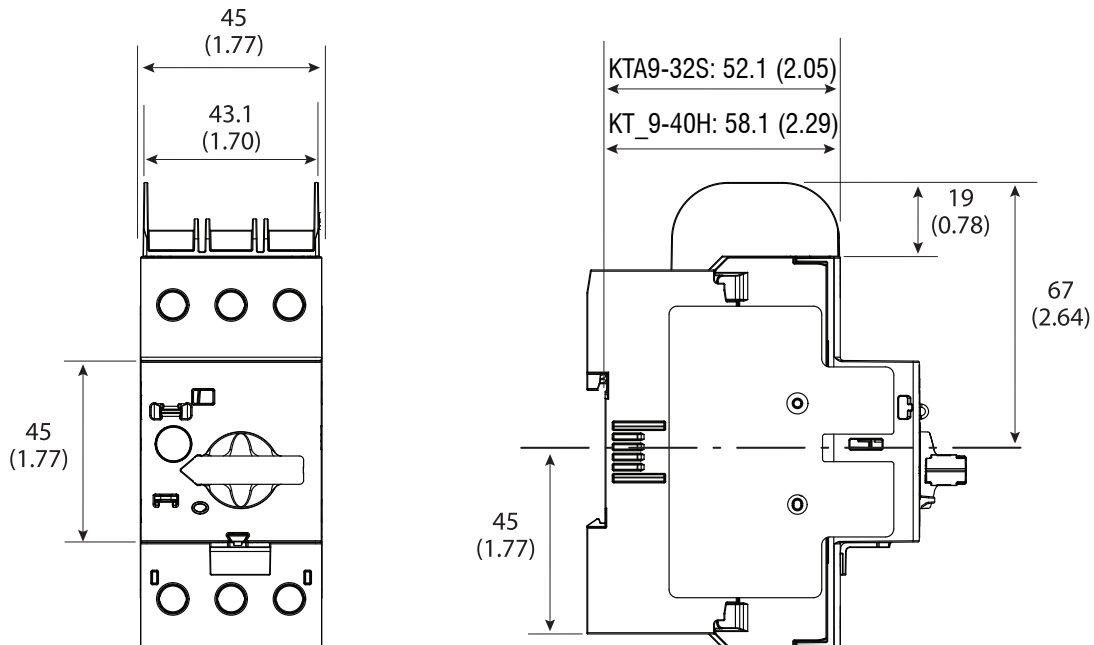

KT_7-45H Mounting Position / Safety Clearance

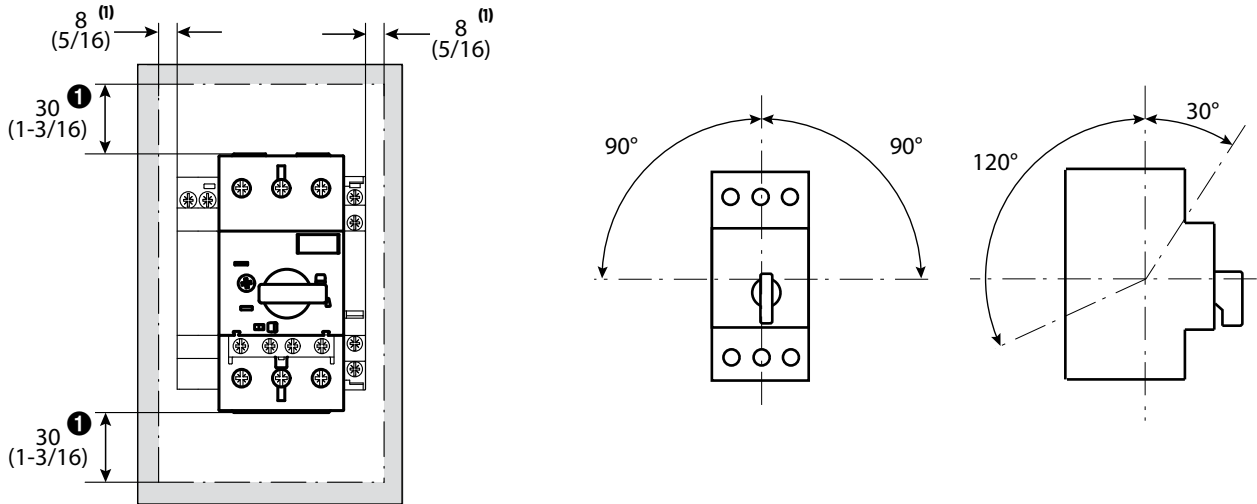

Motor Protection Circuit Breaker (F-Frame), Cat. No. Cat. No. KT_7-45H...

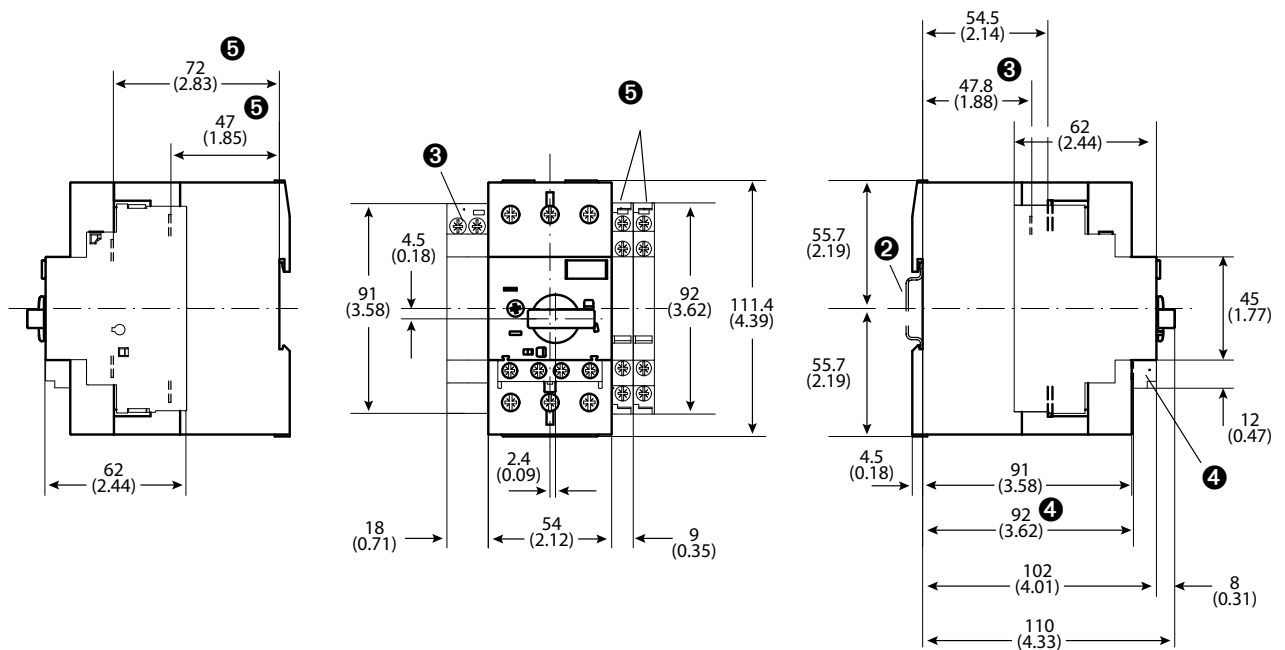


- ❶ Minimum distance to grounded parts or walls
- ❷ Mounting on 35 mm DIN Rail
- ❸ Undervoltage/shunt trip


- ❹ Auxiliary contact (front mounted)
- ❺ Auxiliary contact (side mounted)

KT7-45-TE Type E adapter on Cat. No. KT_7-45H...

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

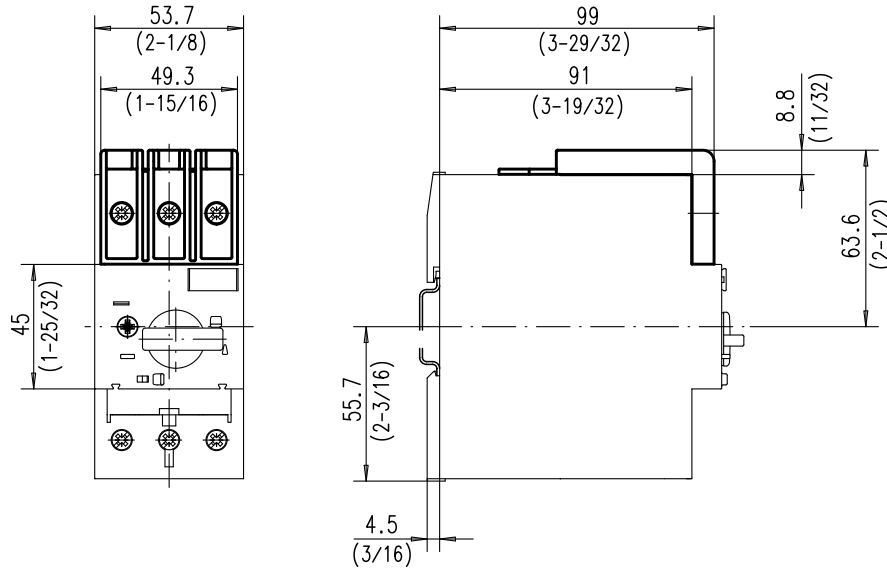

Screw Adapter, Cat. No. KT7-45-AS

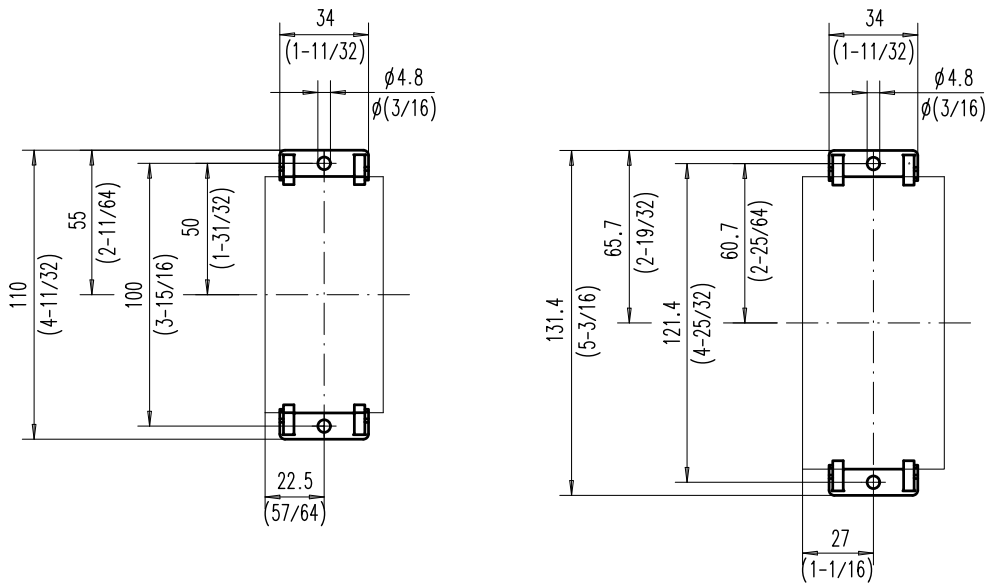

Series KTU9 UL489 Molded Case Circuit Breakers

Versatile, convenient
and space saving...
for a variety of
applications

Sprecher+Schuh's KTU9 series of UL Molded Case Circuit Breakers are UL489 and CE listed for global applications. The current limiting circuit breaker provides fixed short circuit and overcurrent protection and offers high interrupting ratings for 2- and 3-pole devices from 0.5 to 40A. These Circuit breakers are 100% rated up to 10A.

Accessories are intelligently designed to be field installed. The compact busbars and supply blocks reduce wiring errors and installation labor cost. Connection modules for the CA7 Contactors simplify wiring and can reduce the number of DIN rails required, compacting panel space even further.

Advantages...


- Small foot print saves panel space, just 45 x 96 x 89 mm, up to 50% smaller than traditional MCCBs.
- Interrupt rating of 65kA at 480Y/277V may allow higher overall panel short circuit rating
- Up to 6 times higher interrupting rating vs. traditional miniature circuit breakers.

Ideal Applications...

- Feeder Circuits
 - Small Cabinets
 - Distribution panels
 - Branch circuit protection
 - Transformers
 - Heaters
- Control Circuits
 - Control Transformers
 - Power supplies
- Heating, air conditioning and refrigeration (HACR)
- High-intensity discharge
- Switching duty (SWD) 15 and 20 A



Compare these advanced features

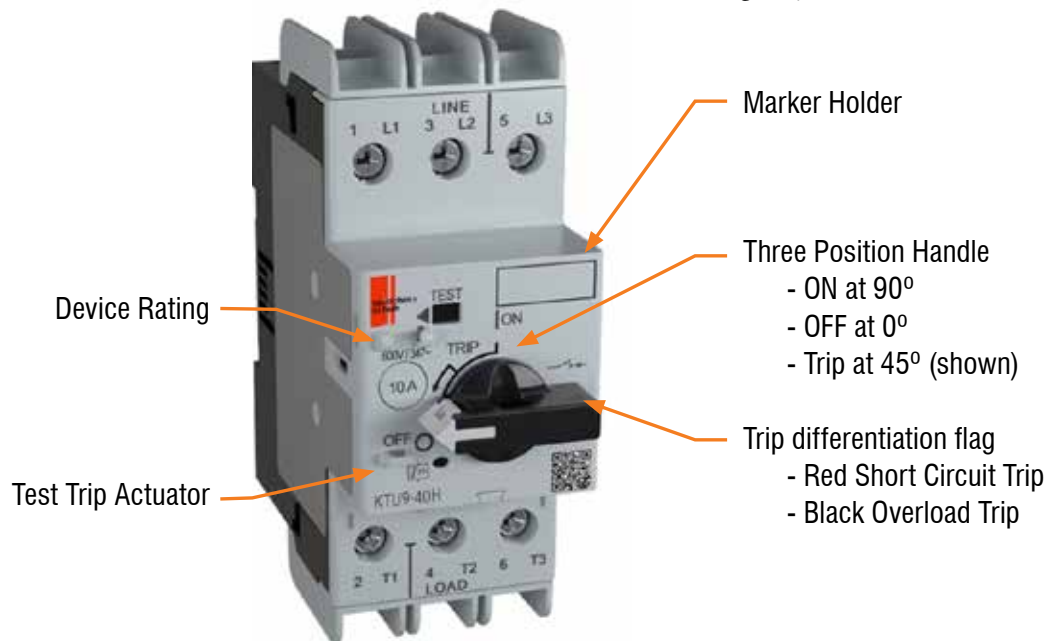

KTU9 Circuit Breaker, Fixed Thermal-Magnetic Ⓜ

Description

The KTU9 is a fixed trip, thermal-magnetic UL489 Molded Case Circuit Breaker.

| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number |
|--|--------------------------|---------------------------------|-----------|-----------|-------------------|
| | | 240V | 480Y/277V | 600Y/347V | |
| KTU9-40H-2D — High Interrupting Capacity – 2-Pole | | | | | |
| 0.5 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-0.5 Ⓜ |
| 1.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-1 Ⓜ |
| 2.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-2 Ⓜ |
| 3.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-3 Ⓜ |
| 4.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-4 Ⓜ |
| 5.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-5 Ⓜ |
| 6.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-6 Ⓜ |
| 8.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-8 Ⓜ |
| 10.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-2D-10 Ⓜ |
| 12.0 | 15...20 x I _n | 65 | 65 | 25 | KTU9-40H-2D-12 |
| 15.0 | 15...20 x I _n | 65 | 65 | 25 | KTU9-40H-2D-15 |
| 20.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-2D-20 |
| 25.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-2D-25 |
| 30.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-2D-30 |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-2D-35 |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-2D-40 |
| KTU9-40H-3D — High Interrupting Capacity – 3-Pole | | | | | |
| 0.5 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-0.5 Ⓜ |
| 1.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-1 Ⓜ |
| 2.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-2 Ⓜ |
| 3.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-3 Ⓜ |
| 4.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-4 Ⓜ |
| 5.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-5 Ⓜ |
| 6.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-6 Ⓜ |
| 8.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-8 Ⓜ |
| 10.0 | 15...20 x I _n | 100 | 100 | 50 | KTU9-40H-3D-10 Ⓜ |
| 12.0 | 15...20 x I _n | 65 | 65 | 25 | KTU9-40H-3D-12 |
| 15.0 | 15...20 x I _n | 65 | 65 | 25 | KTU9-40H-3D-15 |
| 20.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-3D-20 |
| 25.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-3D-25 |
| 30.0 | 15...20 x I _n | 65 | 65 | ~ | KTU9-40H-3D-30 |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-3D-35 |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-3D-40 |



KTU9-40H-3D






KTU9-40H-2D

F KTU9 Molded Case Circuit Breakers

Ⓜ Suitable for continuous operation at 100% of rating only if used in minimum enclosure space of 250 x 175 x 150 mm (10 x 7 x 6 in).
 Ⓜ KTU9 has independent thermal elements suitable for power distribution applications (not two slide bar differential tripping).

Accessories available for KTU9

| | | | |
|--|---|---|--|
|  | <p>KT9-P.. Front/Side Mount Auxiliaries and Trip Contacts</p> <p>1-pole or 2-pole Side-mount not suitable for UL489 applications</p> <p>See pages F1.12-1.13</p> |  | <p>KT9-KN, KT9-KRY or KT9-DS</p> <p>See page F1.16</p> |
|  | <p>KT9-UA Undervoltage Trips ②</p> <p>(UL 489 application up to 30 A) See page F1.14</p> |  | <p>Handle Assemblies KT9-SY or KT9-SB KT9-HTN or KT9-HTRY ②</p> <p>See page F1.15</p> |
|  | <p>KT9-HT/HTL, KT9-S_/N_ & KT9-SHS Extension Shafts & Support</p> <p>See page F1.15</p> |  | <p>KT9-N45 Screw Adaptor</p> <p>See page F1.16</p> |

F

KTU9 Molded Case Circuit Breakers



Extension Shaft Support Assembly

The KT9-SHS is recommended for handle shafts KT9-HT_ or KT9-S_/N_ in lengths greater than 200mm (7.8 inches).
See page F41




Remote Operation Application


The KTU9 3-Pole unit can be combined with CA7 using Connector Modules to achieve remote operation.

- For CA7-9...23 use KTU9-40H-PEC23



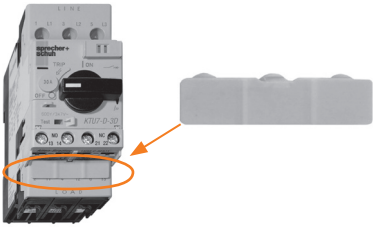
- ① Series B or later.
- ② Series E or later.
- ③ Undervoltage Trip Connection Diagram



Connecting Modules (for connecting KTU9 to CA7 AC coil, or CA7 Electronic DC coil contactors)

| Module | Description | For Connecting... | To Contactor... | Catalog Number |
|---|---|-------------------|-----------------|---------------------|
|  | Connecting Modules <ul style="list-style-type: none"> • 25 Amp maximum • Provides electrical and mechanical interconnection of KTU9 3-Pole and CA7 (with AC coils) or CA7_E (with 12V or 24V Electronic DC coils) • KTU9 and Contactor mount on one DIN rail (see previous page for visual) | KTU9-40H | CA7-9..23 | KTU9-D-PEC23 |

Compact Busbar System for KTU9
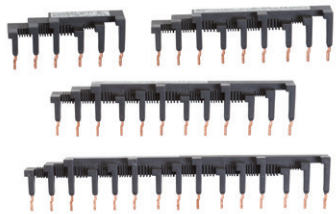
| Accessory | Description | For Use With | Catalog Number |
|---|--|--------------|--|
|  | Compact Busbar — 45 mm Spacing (Rated 64 A) <ul style="list-style-type: none"> • For use with front-mounted auxiliary contact Connects 2-KTU9s Connects 3-KTU9s Connects 4-KTU9s Connects 5-KTU9s (shown) | KTU9-D-3D | KTU9-D-DB-45-2 KTU9-D-DB-45-3 KTU9-D-DB-45-4 KTU9-D-DB-45-5 |
|  | Supply Block and Terminal <ul style="list-style-type: none"> • For power connection to Compact Busbar — 600V, KTU9-D...64A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source • Compliant with UL489 Terminal Clearance standards | KTU9-D-3D | KTU9-D-A3E |
|  | Load Terminal Cover <ul style="list-style-type: none"> • For UL 489 compliance of front mounted auxiliary contacts when installed on KTU9 • The cover packaged in quantities of 10 (must order 10 for one package of 10) | KTU9 | KTU9-D-PF |

F
KTU9 Molded Case Circuit Breakers







IEC Performance Data

(CSA C22.2, UL 489, IEC / EN 60947-1, -2 in connection with a short-circuit protection device)


| | | KTU9-40H- 2 pole & 3 pole | | | | | | | | | | | | | | | |
|--|------|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 0.5A | 1A | 2A | 3A | 4A | 5A | 6A | 8A | 10A | 12A | 15A | 20A | 25A | 30A | 35A | 40A |
| Rated Operational Current I_n | [A] | 0.5 | 1 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 15 | 20 | 25 | 30 | 35 | 40 |
| Fixed Thermal Trip $I_t = I_n$ | [A] | 0.5 | 1 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 15 | 20 | 25 | 30 | 35 | 40 |
| Fixed Magnetic Trip $I_m =$ | [A] | 15...20 x I_n | | | | | | | | | | | | | | | |
| Ultimate Short Circuit Breaking Capacity (50 Hz) I_{cu} | | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 65 | 65 | 65 | 65 | 65 | 65 |
| 500/525V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 |
| 690V | [kA] | 50 | 50 | 18 | 18 | 18 | 18 | 18 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Rated Service Short Circuit Breaking Capacity (50 Hz) I_{cs} | | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| 500/525V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 25 | 25 | 25 | 25 |
| 690V | [kA] | 50 | 50 | 10 | 10 | 10 | 10 | 10 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |

General Data

| | | KTU9-D | |
|---|---|------------------------|--|
| Number of Poles | | 2 and 3 | |
| Rated Insulation | IEC, / EN | [V] | 690 |
| Voltage U_i | UL, CSA | [V] | 690 |
| HACR Ratings | Suitable for continuous operation at 100% of rating only if used in enclosure space for | 480Y/277V 600Y/347V | 0.5...15 A, cubicle space 250 x 175 x 150 mm (10 x 7 x 6 in) 0.5...15 A, cubicle space 300 x 175 x 150mm (11.8 x 7 x 6in) |
| Rated Impulse Withstand Voltage U_{imp} | Pollution degree | | 3 |
| | Main circuits U_{imp} /Overvoltage Category | | 6 kV/III |
| | Auxiliary circuits U_{imp} /Overvoltage Category | | 6 kV/III |
| | Safe separation between main and auxiliary circuits | | up to 400V |
| Rated Frequency | | [Hz] | 50/60 |
| Utilization Category | IEC 60947-2 (Circuit breaker) | | A |
| Life Span | Mechanical | [operations] | 100,000 |
| | Electrical (t_e max.) | [operations] | 10,000 |
| | Switching Frequency | [operations/hour] | max. 25 |
| Ambient Temperature | Storage | [°C (°F)] | -40...+80 |
| | Operation | [°C (°F)] | -25...+60 (70 with 15% In current reduction) (-13...+140 °F [+158 with 15% In current reduction]) |
| Climate Resistance | Moisture / Heat Resistance | (600068-2-30) | 23 °C (73 °F)/83% relative humidity and 40 °C (104 °F)/92% relative humidity, 56 cycles |
| | Dry Heat | (60086-2-2) | 100 °C (212 °F), relative humidity < 50%, 7 days |
| | Moisture Heat | (60068-2-3) | 40 °C (104 °F), relative humidity 93%, 56 days |
| Site Altitude | | [m] | up to 2000 N.N. (6561 ft) |
| Protection Class | | | IP2X when wired |
| Resistance to Shock, Transport | | (60068-2-27) | 30G, 11 ms, all axes |
| Resistance to Vibration, Operation | | (60068-2-6) | 18 G |
| Overload Protection Characteristics | | | Yes per IEC/EN 60947-2, UL489, CSA 22.2 |
| Ambient Temperature Compensation | | [°C (°F)] | -25...+60 (-13...+140) |
| Phase-loss Protection | | | No |
| Short-circuit protection (Magnetic) | | | fixed setting 15...20 x In, (35 A - 14 x In and 40 A - 12 x In) |
| Backfeeding | | | Suitable for backfeeding up to 480Y/277V |
| Total Power loss P_v | at In max | [W] | 7.5 |
| Main Disconnect Switch Application | | | Yes, with accessories |
| HID (High Intensity Discharge) Listed | | | 0.5...40 A |
| Switching Duty | | | 15 A, 20 A |
| Heating, air conditioning and refrigeration (HACR) | | | 0.5...40 A |
| Application Conditions | For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements KTU9 are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments. | | |
| Standards Compliance | | | UL489; CSA C22.2 No. 5(1); IEC / EN 60947-1, -2 |
| Certifications | | | CE; cULus Listed Circuit Breaker (pending) |

| Connection | | No. of conductors | KTU9 ≤ 15A | KTU9 > 15A |
|--|---------------|-------------------|---|---|
| Power Terminals | | |  |  |
| | Terminal Type | | Screw Clamp up to 16 A, M4 | Screw Clamp greater than 16 A, M4 |
| | Screwdriver | | Pozidriv No.2/Blade No.3 | Pozidriv No.2/Blade No.3 |
| Solid or stranded  | 1 conductor | | 1...6 mm ² | 1.5...10 mm ² |
| | 2 conductor | | 1...2.5 mm ² 2.5...6 mm ² | 1.5...4 mm ² 4...10 mm ² |
| Flexible with ferrule (end sleeve)  | 1 conductor | | 1...6 mm ² | 1.5...10 mm ² |
| | 2 conductor | | 1...2.5 mm ² 2.5...4 mm ² | 1.5...4 mm ² 4...10 mm ² |
| Finely stranded  | 1 conductor | | 1.5...6 mm ² | 2.5...10 mm ² |
| | 2 conductor | | 1.5...4 mm ² 2.5...6 mm ² | 2.5...6 mm ² 4...10 mm ² |
| Cross section per UL/CSA solid, stranded  | 1 conductor | | No. 14...10 AWG | No. 14...8 AWG |
| | 2 conductor | | No. 14...10 AWG | No. 14...10 AWG No. 12...8 AWG |
| Stripping length | | | 10 mm (0.39 in.) | 10 mm (0.39 in.) |
| Tightening torque | | [Nm]/[lb-in.] | 2...2.5 / 18...22 | 2...2.5/18...22 |

Time-Current Characteristic

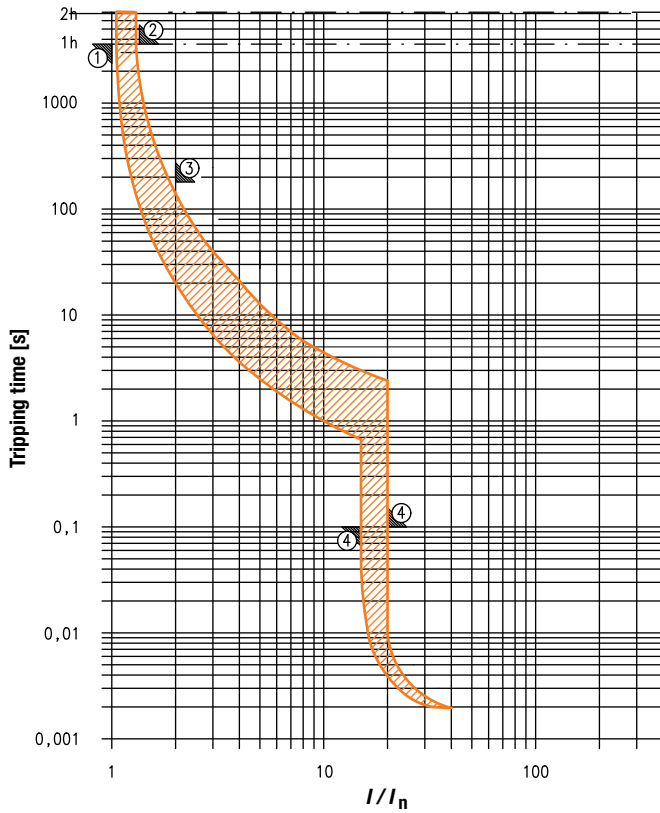

**Tripping characteristic
acc. to UL 489 and IEC 60947-2**

- ① conventional non-tripping current $I_{nt} = 1.0 I_n$
- ② conventional tripping current $I_t = 1.35 I_n ; t < 1h$
- ③ $2.0 I_n ; t = 180s$ max.

**Instantaneous tripping
acc. to UL 489 and IEC 60947-2**


- ④ Trip Curve : $15 \dots 20 I_n$

F


KTU9 Molded Case Circuit Breakers

Cut-off Current ①

KTU9-40H-D*-*
Max. Cut-Off Current at $U_0=480V/60Hz$

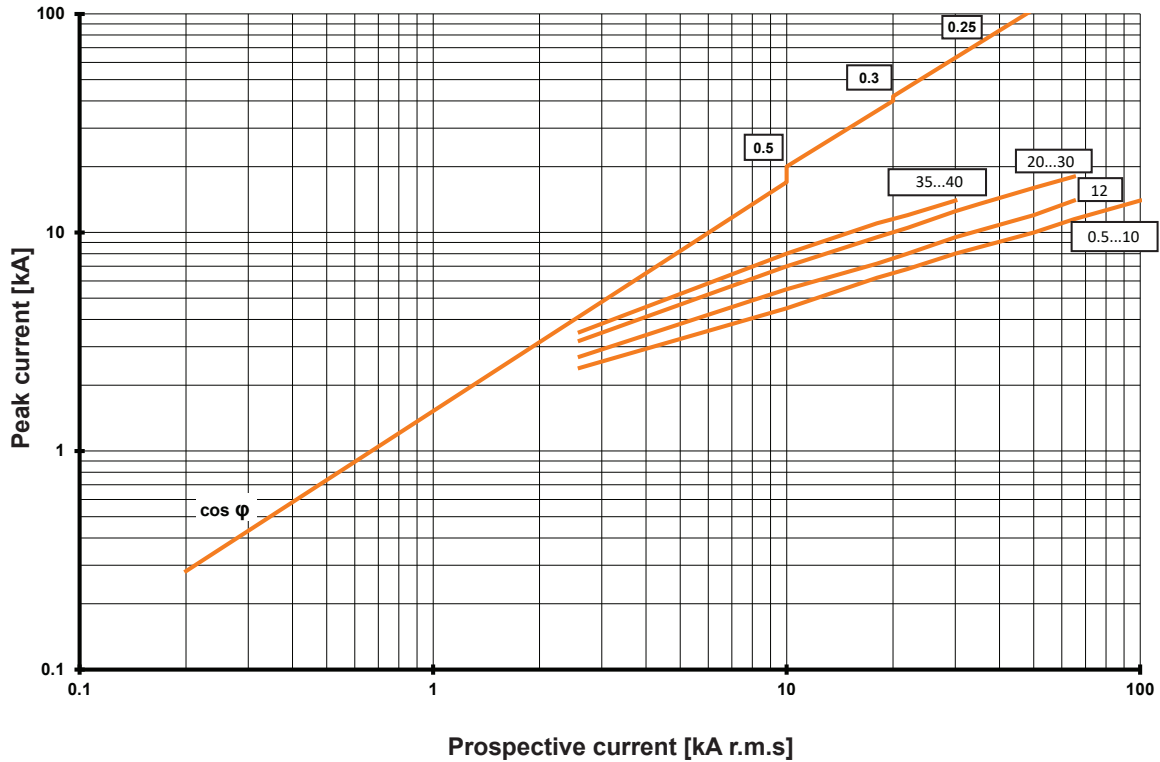

KTU9-40H-D*-*
Max. Let-Through-Energy at $U_0=480V/60Hz$

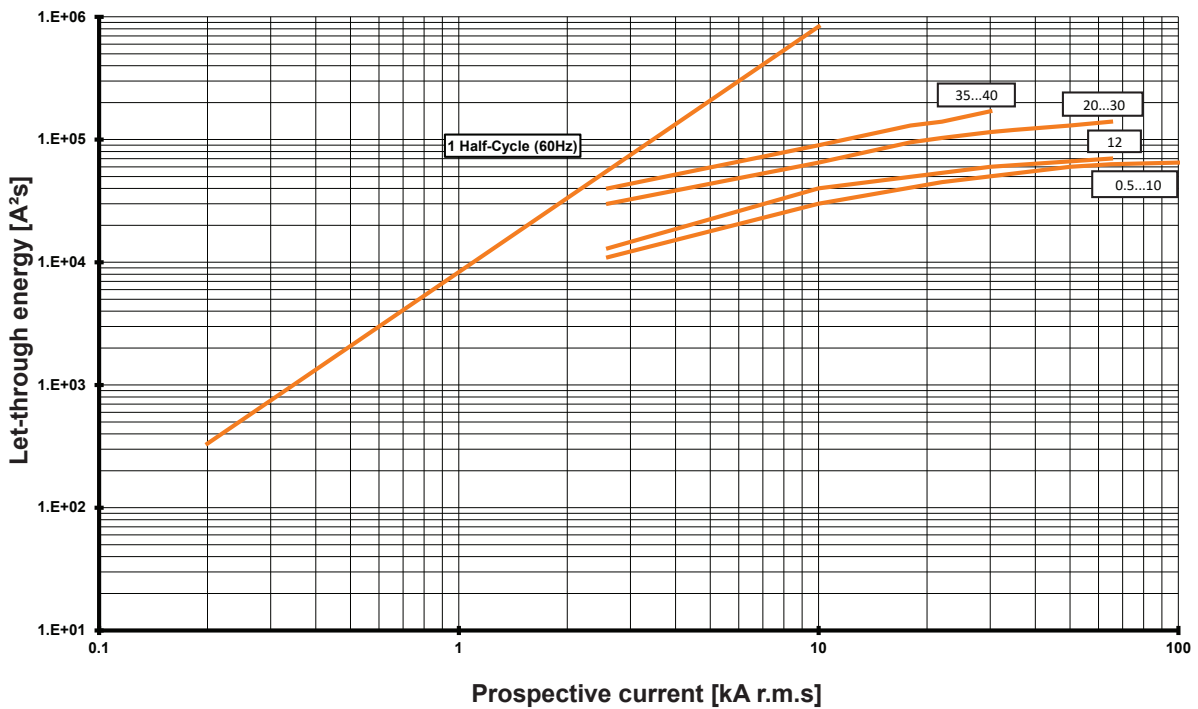


① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.


F
KTU9 Molded Case Circuit Breakers

Cut-off Current ①

KTU9-40H-D*-*
Max. Cut-Off Current at $U_e=600V/60Hz$

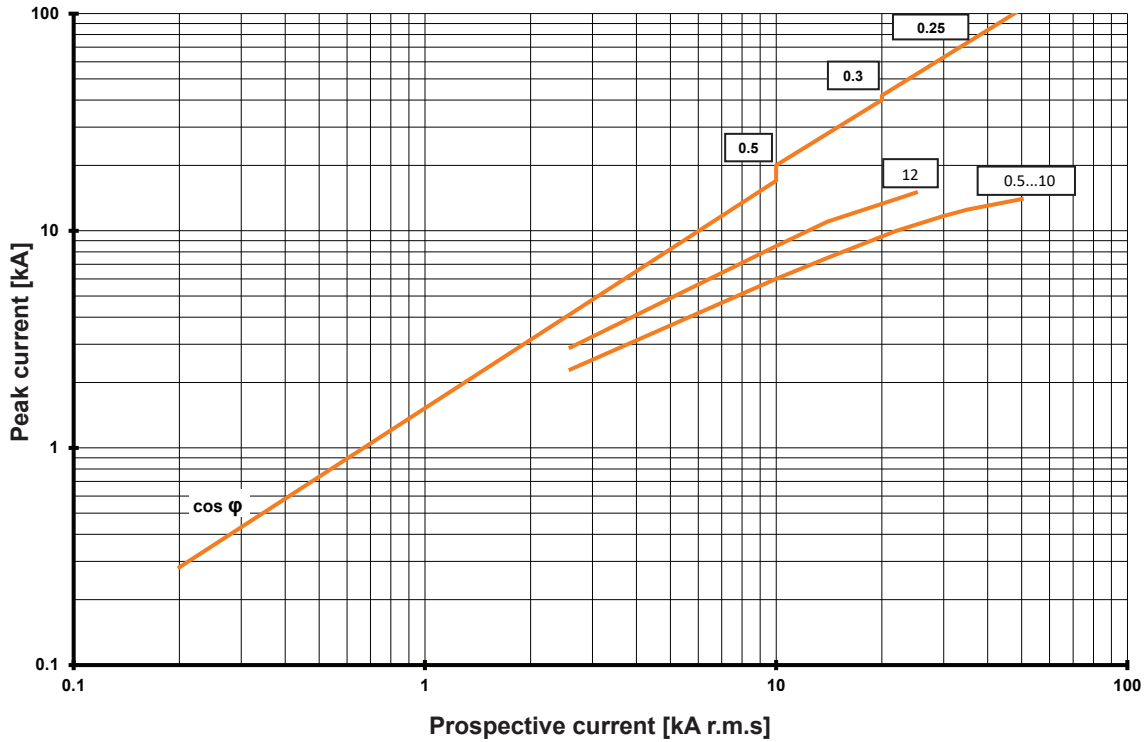


KTU9-40H-D*-*
Max. Let-Through-Energy at $U_e=600V/60Hz$

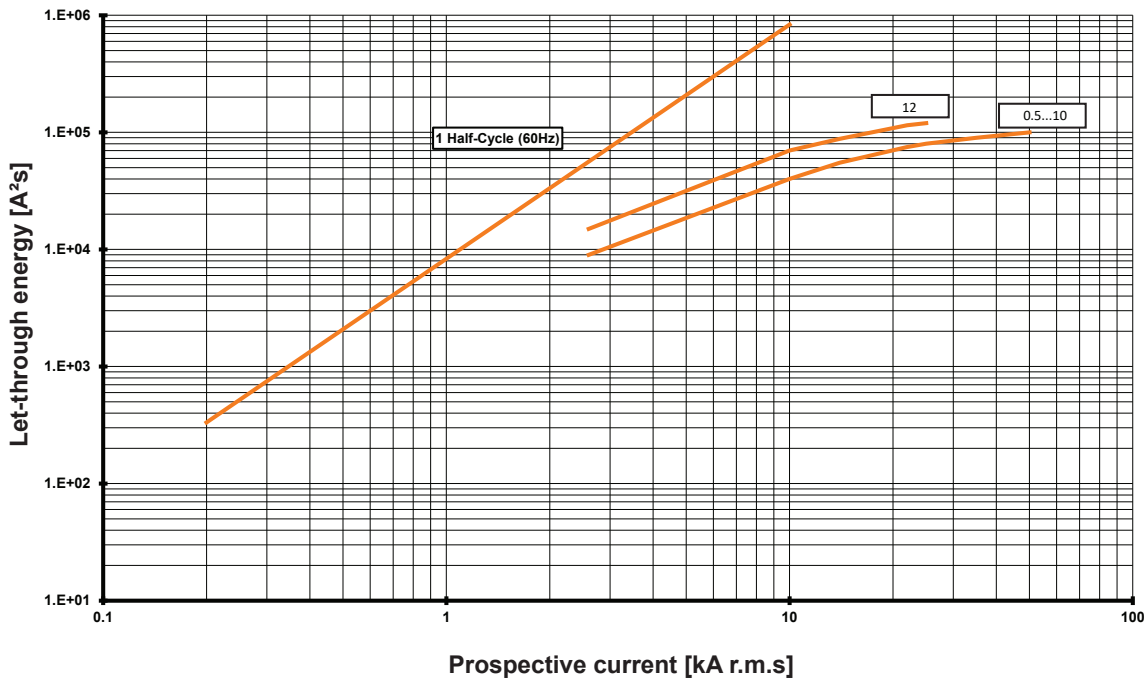

① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprechersschuh.com>.

KTU9-40H Dimensions


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

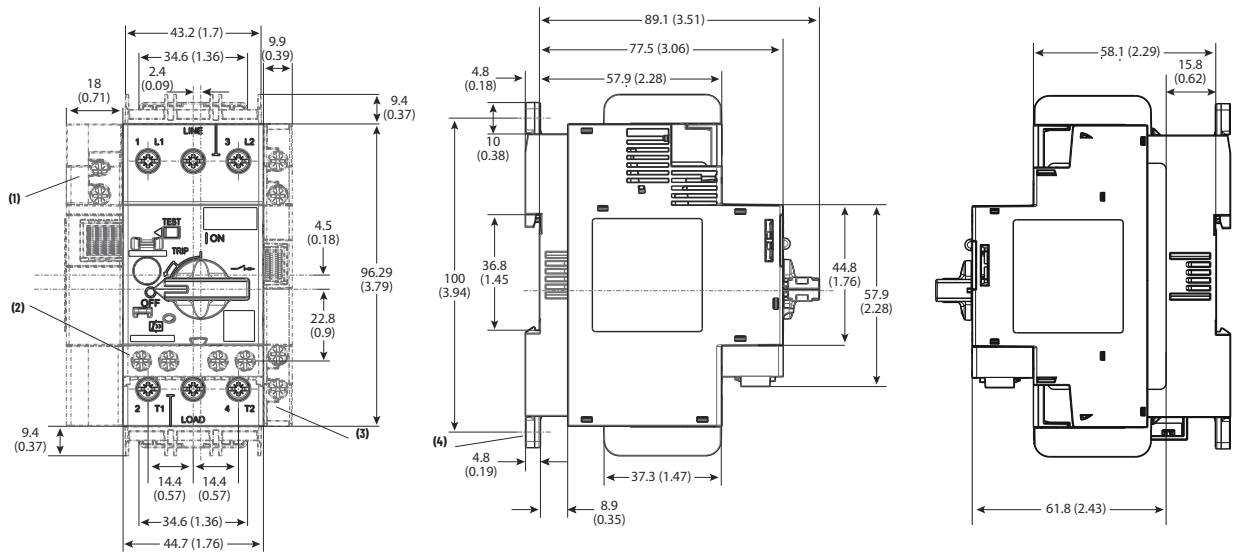


| Note | Information |
|------|-----------------------------------|
| 1 | Undervoltage/shunt trip |
| 2 | Auxiliary contact (front mounted) |
| 3 | Auxiliary contact (side mounted) |
| 4 | Screw mounting adapter |

KTU9 Wiring Diagram

**3-Phase
KTU9-40H-3D**

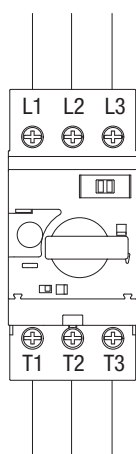


**2-Phase
KTU9-40H-2D**

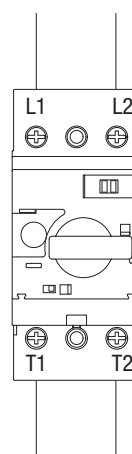


F
KTU9 Molded Case Circuit Breakers

KTU9 with Screw Adaptor KT9-N45

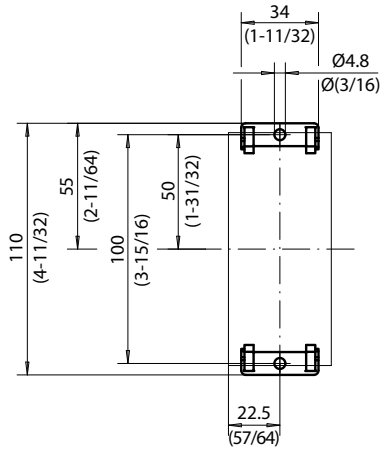


KTU9 Mounting Position

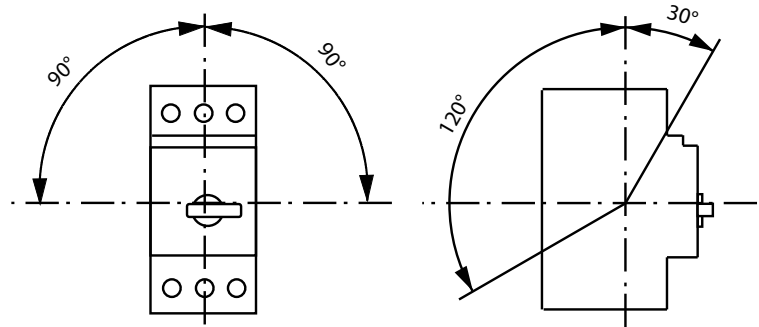

KTU9 Circuit Breaker Enclosure Requirements

Mounting Position and Spacing Requirements

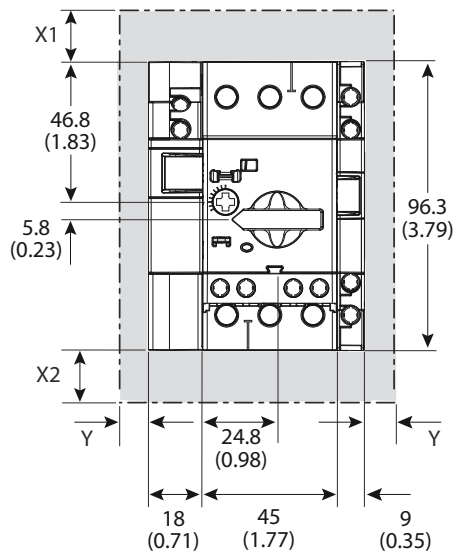

| Voltage [V AC] | Minimum Distance to Grounded Parts or Walls [mm (in.)] | | |
|----------------|--|--------------|-------------|
| | X1 | X2 | Y |
| 400 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) |
| 500 | 30 (1-3/16) | 30 (1-3/16) | 9 (23/64) |
| 690 | 50 (1-31/32) | 50 (1-31/32) | 30 (1-3/16) |

F

KTU9 Molded Case Circuit Breakers

Ecombo Starters

Save space,
save money
in individual or
multi-motor
starter applications

Ecombo Circuit Controllers




See our online white paper

Methods of Applying

KT9

Motor Circuit Controllers

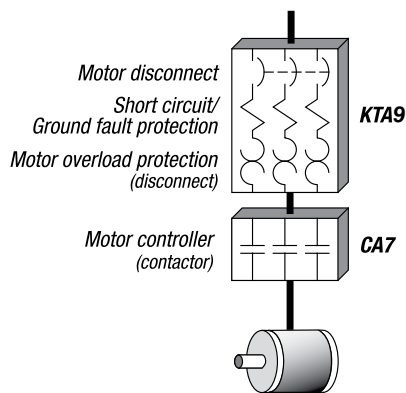

The Ecombo starter line combines a KTA9 self-protected Type E combination controller with a CA7 contactor to form a cost effective compact Type E/F alternative to traditional combination starters.

Sprecher + Schuh's Ecombo starters are the compact alternative to larger and higher priced combination starters. Both models consist of a KTA9 Motor Circuit Controller (cULus listed as a Type E, self-protected combination starter), assembled with a CA7 or CA8 contactor, which provides remote operation (Type E/F). Whether used as a standalone starter or in multi-motor starter applications, Ecombo starters save significant panel space and dollars over conventional combination starter alternatives.

Control and protection for most industrial applications

The Ecombo starter line covers motors to 40 amperes, while providing current limiting short circuit protection up to 65kA. Class 10 thermal overload protection is also assured with a very accurate current adjustment setting which is factory calibrated to the smallest and largest current the unit can handle. A "differential tripping" mechanism also provides accelerated tripping under single phase conditions (see illustration on page F3). Ecombo starters may be selected as Type 2 Coordinated per IEC 60947-4-1, or UL Construction Type E or F.

The Ecombo starter...

Ecombo starters (CLE) come standard with a KTA9 Motor Circuit Controller connected to Sprecher + Schuh's CA7 contactor (or CA8 mini contactor) through a specially designed connection module. The unit is DIN-rail mounted. Contactor coil connections are at the bottom of the starter to provide attractive and cost effective panel wiring. Ecombo starters may also be purchased with just three parts and assembled by the user to further increase economy. The CLE + O/L is a three component starter with a KTB9 controller, CA7 contactor, and a CEP7 solid state overload relay, pre-assembled on a bus bar module and ready to mount to a DIN rail or panel.



CLE Ecombo starter



CLE Three-Component starter

Reduce panel size, complexity and cost

Because KT9 Motor Circuit Controllers are UL listed as self-protected combination starters, NEC / CEC group motor rules are simplified substantially. In many cases, only a non-fused switch is required for panel disconnect. See our online white paper "Methods of Applying KT9 Motor Circuit Controllers", which explains applying KT9s in multi-motor starter applications.

| Series | |
|------------|-------------------|
| CL | Non-reversing S+S |
| CLU | Reversing S+S |

| Mounting Style | |
|----------------|------------------------|
| E | ECO (no mounting rail) |
| S | Sliding Din |

| Contactor Size | |
|----------------|-----|
| 809 | 9A |
| 812 | 12A |
| 709 | 9A |
| 712 | 12A |
| 716 | 16A |
| 723 | 23A |
| 730 | 30A |
| 737 | 37A |

| Contactor Coil | |
|----------------|-------------------------------|
| CA8 | |
| 024Z | 24V 50Hz / 60Hz |
| 0120 | 110V 50Hz / 120V 60Hz |
| 0240 | 240V 50Hz / 60Hz |
| 0600 | 525V 50Hz/ 600V60Hz CA |
| 024D | 24V DC |
| 24DD | 24V DC With Diode |
| CA7 | |
| 024Z | 24V 50Hz / 60Hz |
| 0120 | 110V 50Hz / 120V 60Hz |
| 220W | 208-220V 50Hz / 208-240V 60Hz |
| 220W | 240V 50Hz / 60Hz |
| 0480 | 440V 50Hz / 480V 60Hz |
| 0600 | 550V50Hz / 600V 60Hz |
| 024E | 24V DC |

| Contactor Aux | |
|---------------|-----------------|
| 01 | 1 N.C. |
| 10 | 1 N.O. |
| 02 | 2 N.C. |
| 11 | 1 N.O. + 1 N.C. |
| 12 | 1 N.O. + 2 N.C. |
| 21 | 2 N.O. + 1 N.C. |
| 22 | 2 N.O. + 2 N.C. |
| 30 | 3 N.O. |
| 31 | 3 N.O. + 1 N.C. |
| 32 | 3 N.O. + 2 N.C. |
| 33 | 3 N.O. + 3 N.C. |

| Breaker Frame | |
|---------------|-------------------------------|
| C | KT9 C Frame MCPB only (32S) |
| D | KT9 D Frame MCPB or MCP (40H) |

| Breaker Current | |
|-----------------|---------------|
| A16 | 0.1 - 0.16A |
| A25 | 0.16A - 0.25A |
| A40 | 0.25 - 0.40A |
| A63 | 0.40 - 0.63A |
| B10 | 0.63 - 1A |
| B16 | 1 - 1.6A |
| B25 | 1.6 - 2.5A |
| B40 | 2.5 - 4A |
| B63 | 4 - 6.3A |
| C10 | 6.3 - 10A |
| C16 | 10 - 16A |
| C20 | 14.5 - 20A |
| C25 | 18 - 25A |
| C29 | 23 - 29A |
| C32 | 26.5 - 32A |
| C36 | 30 - 36A |
| C40 | 34 - 40A |

CL E - 709 0120 10 - C B40 B
 CLU E - 723 024E 22 - C C20 B
 CL E - 712 024Z 10 - C C16 B - FDB

| Options | |
|------------|----------------------------|
| -KN | Black Lockable Knob |
| -KY | Red/Yellow Lockable Knob |
| -TE | Spacing Adapter for Type E |
| -W | Mounting Module |
| -JE | Interface Adapter |

| Breaker Aux Code | |
|------------------|----------------------------|
| X | w/o Aux. and Trip Contacts |
| A | 1 NC |
| B | 1 NO |
| C | 1 NO + 1 NC |
| D | 2 NO |
| E | 2 NC |
| R | 1 NC + 1 NO (SC+OL) |
| S | 1 NO + 1 NO (SC+OL) |
| T | 1 NO + 1 NC (SC+OL) |
| N | 1 NO (SC+OL) + 1 NC (SC) |

| Overload Relay | |
|----------------|----------------------------|
| - | No Separate Overload Relay |
| FAB | 0.1...0.5A Solid State |
| FBB | 0.12...1.0A Solid State |
| FCB | 1.0...5.0A Solid State |
| FDB | 3.2...16A Solid State |
| FEB | 5.4...27A Solid State |
| FED | 5.4...27A Solid State |
| FFD | 11...55A Solid State |

This illustration is for reference only.
 Turn to the appropriate page to determine
 specific catalog number.

❶ (D & E) designations indicate DC coil.

Non-Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|--------------------------|-------|-------|---------|------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S – Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLE-809*10-CA16X |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLE-809*10-CA25X |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLE-809*10-CA40X |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-809*10-CA63X |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-809*10-CB10X |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-809*10-CB16X |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-809*10-CB25X |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-809*10-CB40X |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ⑤ | CLE-809*10-CB63X |
| 6.3...10A | 140 | 2 | 2 | 5 | 5 ⑤ | CLE-809*10-CC10X |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ⑥ | CLE-812*10-CC10X |
| 10...16A | 224 | 3 | 3 | 7-1/2 | 10 ⑥ | CLE-812*10-CC16X |




Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Can mount on one DIN-rail

Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|--------------------------|-------|-------|---------|-------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S – Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLUE-809*10-CA16X |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLUE-809*10-CA25X |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLUE-809*10-CA40X |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-809*10-CA63X |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-809*10-CB10X |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-809*10-CB16X |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-809*10-CB25X |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-809*10-CB40X |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ⑤ | CLUE-809*10-CB63X |
| 6.3...10A | 140 | 2 | 2 | 5 | 5 ⑤ | CLUE-809*10-CC10X |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ⑥ | CLUE-812*10-CC10X |
| 10...16A | 224 | 3 | 3 | 7-1/2 | 10 ⑥ | CLUE-812*10-CC16X |

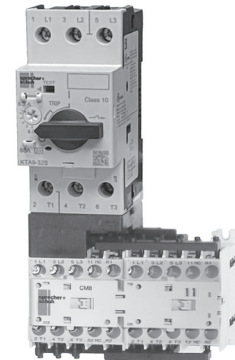

Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

| AC Coil Code | Voltage Range | |
|--------------|--------------------|-------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 0240 | 240V | 240V |
| 0380 ④ | Use Coil Code 0400 | |
| 0400 ④ | 400V | 400V |
| 0480 | 440V | 480V |
| 0575 ⑤ | Use Coil Code 0600 | |
| 0600 ⑤ | 525V | 600V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

② Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.

③ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.

④ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.

⑤ Use this code for 575V applications.

⑥ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|--------------------------|-------|-------|---------|-------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S – Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLE-809*D10-CA16X |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLE-809*D10-CA25X |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLE-809*D10-CA40X |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-809*D10-CA63X |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-809*D10-CB10X |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-809*D10-CB16X |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-809*D10-CB25X |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-809*D10-CB40X |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ⑤ | CLE-809*D10-CB63X |
| 6.3...10A | 140 | 2 | 2 | 5 | 5 ⑤ | CLE-809*D10-CC10X |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ⑥ | CLE-812*D10-CC10X |
| 10...16A | 224 | 3 | 3 | 7-1/2 | 10 ⑥ | CLE-812*D10-CC16X |

Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|--------------------------|-------|-------|---------|--------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S – Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLUE-809*D10-CA16X |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLUE-809*D10-CA25X |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLUE-809*D10-CA40X |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-809*D10-CA63X |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-809*D10-CB10X |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-809*D10-CB16X |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-809*D10-CB25X |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-809*D10-CB40X |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ⑤ | CLUE-809*D10-CB63X |
| 6.3...10A | 140 | 2 | 2 | 5 | 5 ⑤ | CLUE-809*D10-CC10X |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ⑥ | CLUE-812*D10-CC10X |
| 10...16A | 224 | 3 | 3 | 7-1/2 | 10 ⑥ | CLUE-812*D10-CC16X |



Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Can mount on one DIN-rail



Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

| DC Coil Code | Voltage |
|--------------|---------|
| 012 | 12V |
| 024 | 24V ③ |
| 110 | 110V |
| 125 | 125V |
| 220 | 220V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

- KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- Does not include auxiliary contacts. See Factory Options on page F1.48 for additional auxiliary contact configurations.
- The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
- Integrated surge suppressor for coil is available. See page F1.48 for options.
- The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
- Use this code for 575V applications.
- Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ②

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ① |
|--|-------------------|--------------------------|-------|-------|---------|------------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S - Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLE-709*10-CA16B |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLE-709*10-CA25B |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLE-709*10-CA40B |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-709*10-CA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-709*10-CB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-709*10-CB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-709*10-CB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-709*10-CB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ④ | CLE-709*10-CB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ④ | CLE-709*10-CC10B |
| 6.3...10A | 140 | 3 | 3 | 7-1/2 | 7-1/2 ④ | CLE-712*10-CC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 ④ | CLE-716*10-CC16B |
| KTA9-40H – High Interrupting Capacity (14 x In) | | | | | | |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-709*10-DA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-709*10-DB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-709*10-DB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-709*10-DB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-709*10-DB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 | CLE-709*10-DB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLE-709*10-DC10B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLE-712*10-DC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 | CLE-716*10-DC16B |
| 14.5...20A | 280 | 5 | 5 | 10 | 15 ④ | CLE-723*10-DC20B |
| 18...25A | 350 | 5 | 7-1/2 | 15 | 20 ④ | CLE-723*10-DC25B |
| 23...29A | 406 | 7-1/2 | 10 | 20 | 25 ④ | CLE-730*10-DC29B |
| 26.5...32A | 448 | 7-1/2 | 10 | 20 | 30 ④ | CLE-730*10-DC32B |
| 30...36A | 432 | 10 | 10 | 25 | 30 ④ | CLE-737*10-DC36B |
| 34...40A | 480 | 10 | 10 | 25 | 30 ④ | CLE-737*10-DC40B |
| KTA7-45H – High Interrupting Capacity (13 x In) | | | | | | |
| 6.3...10A | 130 | 2 | 3 | 5 | 7-1/2 | CLE-730*10-FC10B-W ② |
| 10...16A | 208 | 3 | 5 | 10 | 10 | CLE-730*10-FC16B-W ② |
| 14.5...20A | 260 | 5 | 5 | 10 | 15 | CLE-730*10-FC20B-W ② |
| 18...25A | 325 | 7-1/2 | 7-1/2 | 15 | 20 | CLE-730*10-FC25B-W ② |
| 23...32A | 416 | 7-1/2 | 10 | 20 | 25 | CLE-730*10-FC32B-W ② |
| 32...45A | 585 | 10 | 10 | 25 | 30 | CLE-737*10-FC45B-W ② |
| 32...45A | 585 | 10 | 15 | 30 | 30 | CLE-743*11-FC45C-W ② ③ |

For applications above 45 amps please consider open type combination starters on page C59.

Coil Codes (*) ①

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 230Z | 230V | 230V |
| 0277 | 240V | 277V |
| 0415 | 400-415V | ~ |
| 0480 ⑤ | 440V | 480V |
| 0600 ⑤ | 550V | 600V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.




Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (AC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ②

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C26 to C29 and 45H models. See modifications on page F69.

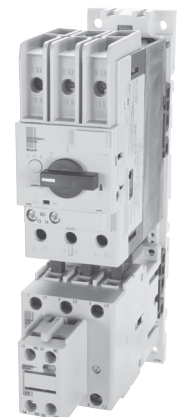

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① Other voltages available, see Section A in this catalog.
- ② CLE-730...743 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 32S models add -W to end of catalog number. See page F69 for modifications.
- ③ CLE-743 supplied with (1) NO and (1) NC front mount auxiliary.
- ④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with DC Coil, Series CA7 Contactor ②

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ① |
|--|-------------------|--------------------------|-------|-------|---------|-------------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S - Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLE-709*E10-CA16B |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLE-709*E10-CA25B |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLE-709*E10-CA40B |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-709*E10-CA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-709*E10-CB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-709*E10-CB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-709*E10-CB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-709*E10-CB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ④ | CLE-709*E10-CB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ④ | CLE-709*E10-CC10B |
| 6.3...10A | 140 | 3 | 3 | 7-1/2 | 7-1/2 ④ | CLE-712*E10-CC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 ④ | CLE-716*E10-CC16B |
| KTA9-40H – High Interrupting Capacity (14 x In) | | | | | | |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLE-709*E10-DA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLE-709*E10-DB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLE-709*E10-DB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-709*E10-DB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLE-709*E10-DB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 | CLE-709*E10-DB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLE-709*E10-DC10B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLE-712*E10-DC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 | CLE-716*E10-DC16B |
| 14.5...20A | 280 | 5 | 5 | 10 | 15 ④ | CLE-723*E10-DC20B |
| 18...25A | 350 | 5 | 7-1/2 | 15 | 20 ④ | CLE-723*E10-DC25B |
| 23...29A | 406 | 7-1/2 | 10 | 20 | 25 ④ | CLE-730*E10-DC29B |
| 26.5...32A | 448 | 7-1/2 | 10 | 20 | 30 ④ | CLE-730*E10-DC32B |
| 30...36A | 432 | 10 | 10 | 25 | 30 ④ | CLE-737*E10-DC36B |
| 34...40A | 480 | 10 | 10 | 25 | 30 ④ | CLE-737*E10-DC40B |
| KTA7-45H – High Interrupting Capacity (13 x In) | | | | | | |
| 6.3...10A | 130 | 2 | 3 | 5 | 7-1/2 | CLE-730*E10-FC10B-W ② |
| 10...16A | 208 | 3 | 5 | 10 | 10 | CLE-730*E10-FC16B-W ② |
| 14.5...20A | 260 | 5 | 5 | 10 | 15 | CLE-730*E10-FC20B-W ② |
| 18...25A | 325 | 7-1/2 | 7-1/2 | 15 | 20 | CLE-730*E10-FC25B-W ② |
| 23...32A | 416 | 7-1/2 | 10 | 20 | 25 | CLE-730*E10-FC32B-W ② |
| 32...45A | 585 | 10 | 10 | 25 | 30 | CLE-737*E10-FC45B-W ② |
| 32...45A | 585 | 10 | 15 | 30 | 30 | CLE-743*E11-FC45C-W ② ③ |

For applications above 45 amps please consider open type combination starters on page C59.

Coil Codes (*) ①

| DC Coil Codes | Voltage |
|---------------|----------|
| 012 | 12V |
| 024 | 24V |
| 036 | 36-48V |
| 048 | 48-72V |
| 110 | 110-125V |
| 220 | 220-250V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- Other voltages available, see Section A in this catalog.
- CLE-730...743 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 32S models add -W to end of catalog number. See page F1.48 for modifications.
- CLE-743 supplied with (1) NO and (1) NC front mount auxiliary.
- Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.




Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (DC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ②


- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C26 to C29 and 45H models. See modifications on page F1.48.

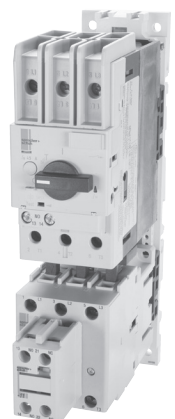

ECombo Circuit Controllers

Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ②

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ① |
|--|-------------------|--------------------------|-------|-------|---------|------------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S - Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLUE-709*22-CA16B |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLUE-709*22-CA25B |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLUE-709*22-CA40B |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-709*22-CA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-709*22-CB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-709*22-CB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-709*22-CB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-709*22-CB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ④ | CLUE-709*22-CB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ④ | CLUE-709*22-CC10B |
| 6.3...10A | 140 | 3 | 3 | 7-1/2 | 7-1/2 ④ | CLUE-712*22-CC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 ④ | CLUE-716*22-CC16B |
| KTA9-40H - High Interrupting Capacity (14 x In) | | | | | | |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-709*22-DA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-709*22-DB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-709*22-DB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-709*22-DB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-709*22-DB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 | CLUE-709*22-DB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLUE-709*22-DC10B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLUE-712*22-DC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 | CLUE-716*22-DC16B |
| 14.5...20A | 280 | 5 | 5 | 10 | 15 ④ | CLUE-723*22-DC20B |
| 18...25A | 350 | 5 | 7-1/2 | 15 | 20 ④ | CLUE-723*22-DC25B |
| 23...29A | 406 | 7-1/2 | 10 | 20 | 25 ④ | CLUE-730*22-DC29B ② |
| 26.5...32A | 448 | 7-1/2 | 10 | 20 | 30 ④ | CLUE-730*22-DC32B ② |
| 30...36A | 432 | 10 | 10 | 25 | 30 ④ | CLUE-737*22-DC36B ② |
| 34...40A | 480 | 10 | 10 | 25 | 30 ④ | CLUE-737*22-DC40B ② |
| KTA7-45H - High Interrupting Capacity (13 x In) | | | | | | |
| 6.3...10A | 130 | 2 | 3 | 5 | 7.5 | CLUE-730*22-FC10B-W ② |
| 10...16A | 208 | 3 | 5 | 10 | 10 | CLUE-730*22-FC16B-W ② |
| 14.5...20A | 260 | 5 | 5 | 10 | 15 | CLUE-730*22-FC20B-W ② |
| 18...25A | 325 | 7.5 | 7.5 | 15 | 20 | CLUE-730*22-FC25B-W ② |
| 23...32A | 416 | 7.5 | 10 | 20 | 25 | CLUE-730*22-FC32B-W ② |
| 32...45A | 585 | 10 | 10 | 25 | 30 | CLUE-737*22-FC45B-W ② |
| 32...45A | 585 | 10 | 15 | 30 | 30 | CLUE-743*22-FC45C-W ②③ |

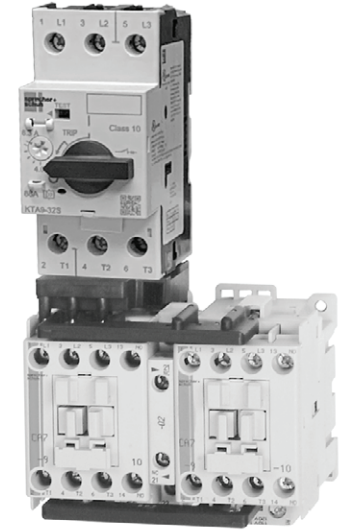

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (AC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ②

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C29...C40 and 45H models. See modifications on page F69.

F

Ecombo Circuit Controllers

Coil Codes (*) ①

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 230Z | 230V | 230V |
| 0277 | 240V | 277V |
| 0415 | 400-415V | ~ |
| 0480 ⑤ | 440V | 480V |
| 0600 ⑤ | 550V | 600V |

Horsepower ratings shown in the tables are for reference only. **The final selection of the controller depends on the actual motor full load current and service factor.**

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.


Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① Other voltages available, see Section A in this catalog.
- ② CLUE-730...743 with KTA9-40H and KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17
- ③ CLUE-743 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
- ④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Reversing Ecombo Starters with DC Coil, Series CA7 Contactor ②

| Thermal Trip [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ① |
|--|-------------------|--------------------------|-------|-------|---------|-------------------------|
| | | 200V | 230V | 460V | 575V | |
| KTA9-32S - Standard Interrupting Capacity (14 x In) | | | | | | |
| 0.10...0.16A | 2.2 | ~ | ~ | ~ | ~ | CLUE-709*E22-CA16B |
| 0.16...0.25A | 3.5 | ~ | ~ | ~ | ~ | CLUE-709*E22-CA25B |
| 0.25...0.40A | 5.6 | ~ | ~ | ~ | ~ | CLUE-709*E22-CA40B |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-709*E22-CA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-709*E22-CB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-709*E22-CB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-709*E22-CB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-709*E22-CB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 ④ | CLUE-709*E22-CB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 ④ | CLUE-709*E22-CC10B |
| 6.3...10A | 140 | 3 | 3 | 7-1/2 | 7-1/2 ④ | CLUE-712*E22-CC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 ④ | CLUE-716*E22-CC16B |
| KTA9-40H - High Interrupting Capacity (14 x In) | | | | | | |
| 0.40...0.63A | 8.8 | ~ | ~ | ~ | ~ | CLUE-709*E22-DA63B |
| 0.63...1.0A | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-709*E22-DB10B |
| 1.0...1.6A | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-709*E22-DB16B |
| 1.6...2.5A | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-709*E22-DB25B |
| 2.5...4.0A | 56 | 3/4 | 3/4 | 2 | 3 | CLUE-709*E22-DB40B |
| 4.0...6.3A | 88 | 1 | 1-1/2 | 3 | 5 | CLUE-709*E22-DB63B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLUE-709*E22-DC10B |
| 6.3...10A | 140 | 2 | 2 | 5 | 7-1/2 | CLUE-712*E22-DC10B |
| 10...16A | 224 | 3 | 5 | 10 | 10 | CLUE-716*E22-DC16B |
| 14.5...20A | 280 | 5 | 5 | 10 | 15 ④ | CLUE-723*E22-DC20B |
| 18...25A | 350 | 5 | 7-1/2 | 15 | 20 ④ | CLUE-723*E22-DC25B |
| 23...29A | 406 | 7-1/2 | 10 | 20 | 25 ④ | CLUE-730*E22-DC29B ② |
| 26.5...32A | 448 | 7-1/2 | 10 | 20 | 30 ④ | CLUE-730*E22-DC32B ② |
| 30...36A | 432 | 10 | 10 | 25 | 30 ④ | CLUE-737*E22-DC36B ② |
| 34...40A | 480 | 10 | 10 | 25 | 30 ④ | CLUE-737*E22-DC40B ② |
| KTA7-45H - High Interrupting Capacity (13 x In) | | | | | | |
| 6.3...10A | 130 | 2 | 3 | 5 | 7.5 | CLUE-730*E22-FC10B-W ② |
| 10...16A | 208 | 3 | 5 | 10 | 10 | CLUE-730*E22-FC16B-W ② |
| 14.5...20A | 260 | 5 | 5 | 10 | 15 | CLUE-730*E22-FC20B-W ② |
| 18...25A | 325 | 7.5 | 7.5 | 15 | 20 | CLUE-730*E22-FC25B-W ② |
| 23...32A | 416 | 7.5 | 10 | 20 | 25 | CLUE-730*E22-FC32B-W ② |
| 32...45A | 585 | 10 | 10 | 25 | 30 | CLUE-737*E22-FC45B-W ② |
| 32...45A | 585 | 10 | 15 | 30 | 30 | CLUE-743*E22-FC45C-W ②⑥ |

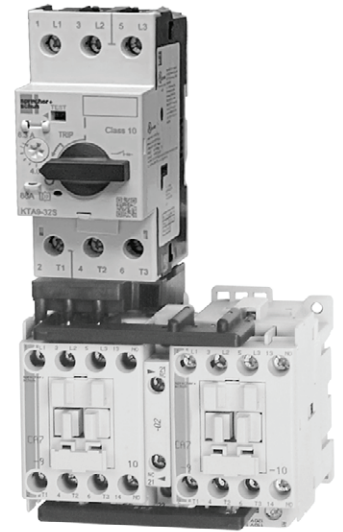

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (DC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ②

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C29...C40 and 45H models. See modifications on page F1.48.

F

Ecombo Circuit Controllers

Coil Codes (*) ①

| DC Coil Codes | Voltage |
|---------------|----------|
| 012 | 12V |
| 024 | 24V |
| 036 | 36-48V |
| 048 | 48-72V |
| 110 | 110-125V |
| 220 | 220-250V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① Other voltages available, see Section A in this catalog.
- ② CLUE-730...743 with KTA9-40H and KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17
- ③ CLUE-743 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
- ④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

CLE and CLUE Modifications ③

| Modification | Change Last Digit in Catalog Number to: ❶ |
|--|---|
| KT9 Auxiliary (Front Mount 250VAC max.) and Trip Contacts | |
| Auxiliary Contact 1 NO (CL_-8 only) | B |
| Auxiliary Contact 1 NC | A |
| Auxiliary Contact 1 NO + 1 NC | C |
| Auxiliary Contact 2 NO | D |
| 1 NO SC or OL + 1 NC Auxiliary Contact | R |
| 1 NO SC or OL + 1 NO Auxiliary Contact | S |
| 1 NC SC or OL + 1 NO Auxiliary Contact | T |
| KT9 Auxiliary (Side Mount 600VAC max.) and Trip Contacts | |
| Auxiliary Contact 2 NC | E |

CLE and CLUE Additions ③

Add desired suffix AFTER auxiliary contact option code.

| Addition | Add Suffix to Catalog Number: |
|---|-------------------------------|
| Accessories | |
| Electronic Interfaces (CA7) | -JE ❷ |
| Lockable Twist Knob (KT9) - Black | -KN |
| Lockable Twist Knob (KT9) - Red/Yellow | -KY |
| Type W Mounting Module for CLE-709...723 includes 45mm short module (W-32489) | -W |
| Type W Mounting Module for CLUE-709...723 includes 45mm (W-32849) and 54mm (W-32490) short module | -W |
| Additional KT9 Trip Contacts (Side Mount) | |
| 1 NO SC or OL + 1 NO SC | -R00 |
| 1 NO SC or OL + 1 NC SC | -R01 |
| 1 NC SC or OL + 1 NO SC | -R10 |
| 1 NC SC or OL + 1 NC SC | -R11 |
| 1 NO SC + 1 NC SC | -M11 |

F
ECombo Circuit Controllers

❶ For CLE-8... or CLUE-8..., change last digit "X" to one of the modifications listed. Example: – CLE-809*10-CA16X changes to CLE-809*10-CA16B.
For CLE-7... or CLUE-7..., change last digits "B" to one of the modifications listed. Example: CLE-709*10-CA16B changes to CLE-709*10-CA16C.

❷ CRI7E-24 will be used. CRI7E-12 by special order only.

❸ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.

Non-Reversing 3-Component Ecombo Starters ③④

| Rated Oper. Current [A] ⑥ | Overload Adj. Range [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------------|-------------------|--------------------------|-------|-------|-------|----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTB9-40H – High Interrupting Capacity (14 x In) | | | | | | | |
| 0.63 | 1.0...5.0 | 8.8 | ~ | ~ | ~ | ~ | CLE-709*10-DA63B-FCB |
| 1.0 | 1.0...5.0 | 14 | ~ | ~ | 1/2 | 1/2 | CLE-709*10-DB10B-FCB |
| 1.6 | 1.0...5.0 | 22 | ~ | ~ | 3/4 | 3/4 | CLE-709*10-DB16B-FCB |
| 2.5 | 1.0...5.0 | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLE-709*10-DB25B-FCB |
| 4.0 | 1.0...5.0 | 52 | 3/4 | 3/4 | 2 | 3 | CLE-709*10-DB40B-FCB |
| 6.3 | 3.2...16 | 88 | 1 | 1-1/2 | 3 | 5 | CLE-709*10-DB63B-FDB |
| 10 | 3.2...16 | 130 | 2 | 2 | 5 | 7-1/2 | CLE-709*10-DC10B-FDB |
| 16 | 5.4...27 | 208 | 3 | 3 | 7-1/2 | 10 | CLE-712*10-DC16B-FEB |
| 20 | 5.4...27 | 280 | 5 | 5 | 10 | ~ | CLE-723*10-DC20B-FEB |
| 25 | 5.4...27 | 325 | 5 | 7-1/2 | 15 | ~ | CLE-723*10-DC25B-FEB |
| 29 | 11...55 | 406 | 7-1/2 | 10 | 20 | ~ | CLE-730*10-DC29B-FFD |
| 32 | 11...55 | 448 | 7-1/2 | 10 | 20 | ~ | CLE-730*10-DC32B-FFD |
| KTB7-45H – High Interrupting Capacity (13 x In) | | | | | | | |
| 25 | 5.4...27 | 325 | 5 | 7-1/2 | 15 | 20 | CLE-730*10-FC25B-FED |
| 32 | 11...55 | 416 | 7-1/2 | 10 | 20 | 25 | CLE-730*10-FC32B-FFD |
| 32 | 11...55 | 416 | 7-1/2 | 10 | 20 | 25 | CLE-737*10-FC32B-FFD |
| 45 | 11...55 | 585 | 10 | 10 | 25 | 30 | CLE-737*10-FC45B-FFD |
| 45 | 11...55 | 585 | 10 | 15 | 30 | ~ | CLE-743*11-FC45C-FFD |



Includes:

- KTB9 Motor Controller
- CA7 Contactor (AC)
- CEP7 Solid State Overload Relay
- KT9 Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 40H or 45H Frame Units as required from page F17
- See page F72 for Factory Options

Coil Codes (*) ①

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 230Z | 230V | 230V |
| 0277 | 240V | 277V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |


Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Other voltages available, see Section A in this catalog.
- ③ All CLE are supplied with Auxiliary Contacts for customer use as follows:
 CLE-709...723 (1) NO Internal Mount
 CLE-730...737 (1) NO Side Mount
 CLE-743 (1) NO & (1) NC Front Mount
 All KTB9s are supplied with (1) NO auxiliary contact, which should be used in series with the NC contact on the overload (95-96).
- ④ Horsepower ratings shown in tables are for reference only. **The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.**
- ⑤ The KTB9 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a shortcircuit. A separate Sprecher + Schuh CEP7-1EF overload relay with selectable trip class should be used to protect the motor against overload. In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (Ie) of the motor FLA must be multiplied by the following factors for selection of the KTB9 Motor Circuit Controller KTB9-40H and KTB7-45H.
 Trip classes according to UL 508 Section 52 and IEC 60947-4-1
 CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.7
 The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB9.

Reversing 3-Component Ecombo Starters ③④⑤

| Rated Oper. Current [A] ⑥ | Overload Adj. Range [A] | Magnetic Trip [A] | Typical Three Phase [HP] | | | | Catalog Number ②④⑦ |
|--|-------------------------|-------------------|--------------------------|-------|-------|-------|-----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTB9-40H – High Interrupting Capacity (14 x In) | | | | | | | |
| 0.63 | 1.0...5.0 | 8.8 | ~ | ~ | ~ | ~ | CLUE-709*10-DA63B-FCB |
| 1.0 | 1.0...5.0 | 14 | ~ | ~ | 1/2 | 1/2 | CLUE-709*10-DB10B-FCB |
| 1.6 | 1.0...5.0 | 22 | ~ | ~ | 3/4 | 3/4 | CLUE-709*10-DB16B-FCB |
| 2.5 | 1.0...5.0 | 35 | 1/2 | 1/2 | 1 | 1-1/2 | CLUE-709*10-DB25B-FCB |
| 4.0 | 1.0...5.0 | 52 | 3/4 | 3/4 | 2 | 3 | CLUE-709*10-DB40B-FCB |
| 6.3 | 3.2...16 | 88 | 1 | 1-1/2 | 3 | 5 | CLUE-709*10-DB63B-FDB |
| 10 | 3.2...16 | 130 | 2 | 2 | 5 | 7-1/2 | CLUE-709*10-DC10B-FDB |
| 16 | 5.4...27 | 208 | 3 | 3 | 7-1/2 | 10 | CLUE-712*10-DC16B-FEB |
| 20 | 5.4...27 | 280 | 5 | 5 | 10 | ~ | CLUE-723*10-DC20B-FEB |
| 25 | 5.4...27 | 325 | 5 | 7-1/2 | 15 | ~ | CLUE-723*10-DC25B-FEB |
| 29 | 11...55 | 406 | 7-1/2 | 10 | 20 | ~ | CLUE-730*10-DC29B-FFD |
| 32 | 11...55 | 448 | 7-1/2 | 10 | 20 | ~ | CLUE-730*10-DC32B-FFD |
| KTB7-45H – High Interrupting Capacity (13 x In) | | | | | | | |
| 25 | 5.4...27 | 325 | 5 | 7-1/2 | 15 | 20 | CLUE-730*22-FC25B-FED |
| 32 | 11...55 | 416 | 7-1/2 | 10 | 20 | 25 | CLUE-730*22-FC32B-FFD |
| 32 | 11...55 | 416 | 7-1/2 | 10 | 20 | 25 | CLUE-737*22-FC32B-FFD |
| 45 | 11...55 | 585 | 10 | 10 | 25 | 30 | CLUE-737*22-FC45B-FFD |
| 45 | 11...55 | 585 | 10 | 15 | 30 | ~ | CLUE-743*22-FC45B-FFD |

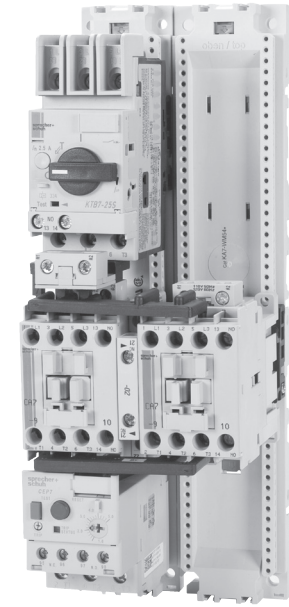

Includes:

- KTB9 Motor Controller
- CAU7 Reversing Contactor (AC)
- CEP7 Solid State Overload Relay
- KT9 Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 40H or 45H Frame Units as required from page F17
- See page F72 for Factory Options

Coil Codes (*) ①

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 230Z | 230V | 230V |
| 0277 | 240V | 277V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Other voltages available, see Section A in this catalog.
- ③ All CLUE are supplied with Auxiliary Contacts for customer use as follows;
 - CLUE-709...723 (1) NO Internal Mount
 - CLUE-730...737 (1) NO Side Mount
 - CLUE-743 (1) NO & (1) NC Front Mount
 - CM7-02 interlock (2) NC (Electrical Interlocks)
 All KTB9s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
- ④ All CAU7 reversing contactors are supplied with CM7-02, including (2) NC contacts for electronic interlocking (not available for customer use).
- ⑤ Horsepower ratings shown in tables are for reference only. **The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.**
- ⑥ The KTB9 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-1EF overload relay with selectable trip class should be used to protect the motor against overload. In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (Ie) of the motor FLA must be multiplied by the following factors for selection of the KTB9 Motor Circuit Controller KTB9-40H and KTB7-45H.
 - Trip classes according to UL 508 Section 52 and IEC 60947-4-1
 - CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
 The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB9.

KT9 Assembly – Application Rating Chart (Ratings are dependent on type of application) ①

| KT9 | UL 60947-4-1 | | | | | | UL Type 4-1 Type F | | |
|---|--|------------------------|---------------------------------|------|---------------------------------|------|------------------------------|---------------------------------|-------------|
| | Max. Fuse or Circuit Breaker per NEC [A] | Minimum Contactor Size | Group Motor Installation | | Motor Disconnect | | Combination Motor Controller | | |
| | | | Max. Short-Circuit Current [kA] | | Max. Short-Circuit Current [kA] | | Minimum Contactor Size | Max. Short-Circuit Current [kA] | |
| | | | 480V | 600V | 480V | 600V | | 480Y/277V ① | 600Y/347V ① |
| KTA9-32S + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | | | | |
| KTA9-32S-0.16A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-0.25A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-0.40A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-0.63A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-1.0A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-1.6A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-32S-2.5A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-32S-4.0A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-32S-6.3A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | ~ |
| KTA9-32S-10A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | ~ |
| KTA9-32S-16A | 450 | CA7-12 | 30 | 30 | 30 | 30 | CA7-12 | 30 | ~ |
| KTA9-32S-20A | 450 | CA7-23 | 30 | 30 | 30 | 10 | ~ | ~ | ~ |
| KTA9-32S-25A | 450 | CA7-23 | 30 | 18 | 10 | 5 | ~ | ~ | ~ |
| KTA9-32S-25A | 450 | CA7-30 | 30 | 18 | 30 | 5 | ~ | ~ | ~ |
| KTA9-32S-29A | 450 | CA7-30 | 30 | 10 | 10 | ~ | ~ | ~ | ~ |
| KTA9-32S-32A | 450 | CA7-37 | 30 | 10 | 10 | ~ | ~ | ~ | ~ |
| KTA9-40H + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | | | | |
| KTA9-40H-0.63A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-40H-1.0A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-40H-1.6A | 450 | CA7-9 | 65 | 50 | 65 | 50 | CA7-9 | 65 | 50 |
| KTA9-40H-2.5A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-40H-4.0A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-40H-6.3A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-40H-10A | 450 | CA7-9 | 65 | 30 | 65 | 30 | CA7-9 | 65 | 30 |
| KTA9-40H-16A | 450 | CA7-12 | 65 | 30 | 65 | 30 | CA7-12 | 65 | 30 |
| KTA9-40H-20A | 450 | CA7-23 | 65 | 30 | 65 | 30 | CA7-23 | 65 | ~ |
| KTA9-40H-25A | 450 | CA7-23 | 50 | 30 | 50 | 30 | CA7-23 | 50 | ~ |
| KTA9-40H-29A | 450 | CA7-30 | 50 | 30 | 50 | 30 | CA7-30 | 50 | ~ |
| KTA9-40H-32A | 450 | CA7-37 | 50 | 30 | 50 | 18 | CA7-37 | 30 | ~ |
| KTA9-40H-36A | 450 | CA7-37 | 30 | 30 | 30 | 18 | CA7-37 | 30 | ~ |
| KTA9-40H-40A | 450 | CA7-37 | 30 | 30 | 30 | 18 | CA7-37 | 30 | ~ |
| KTA7-45H + CA7 UL Assemblies (CLE) / (13 x In) | | | | | | | | | |
| KTA7-45H-10A | 600 | CA7-30 | 65 | 30 | 65 | 30 | CA7-30 | 65 | 30 |
| KTA7-45H-16A | 600 | CA7-30 | 65 | 30 | 65 | 30 | CA7-30 | 65 | 30 |
| KTA7-45H-20A | 600 | CA7-30 | 65 | 30 | 65 | 30 | CA7-30 | 65 | 30 |
| KTA7-45H-25A | 600 | CA7-30 | 65 | 30 | 65 | 30 | CA7-30 | 65 | 30 |
| KTA7-45H-32A | 600 | CA7-30 | 65 | 30 | 65 | 30 | CA7-30 | 65 | 30 |
| KTA7-45H-45A | 600 | CA7-37 | 65 | 18 | 65 | 18 | CA7-37 | 65 | ~ |

① The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

UL 60947 Application Ratings, MPCBs' with Series CA8 Contactors

| KT9 | UL 60947-4-1 | | | | | | UL Type 4-1 Type F | | |
|---|--|------------------------|-----------------------------------|------|-----------------------------------|------|------------------------------|---------------------------------|-------------|
| | Max. Fuse or Circuit Breaker per NEC [A] | Minimum Contactor Size | Group Motor Installation | | Motor Disconnect | | Combination Motor Controller | | |
| | | | Max. Short-Circuit Current [kA] | | Max. Short-Circuit Current [kA] | | Minimum Contactor Size | Max. Short-Circuit Current [kA] | |
| | | | 480V | 600V | 480V | 600V | | 480Y/277V ① | 600Y/347V ① |
| KTA9-32S + CA8 UL Assemblies (CLE) / (14 x In) | | | | | | | | | |
| KTA9-32S-0.16A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-0.25A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-0.40A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-0.63A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-1.0A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-1.6A | 450 | CA8-09 | 65 | 47 | 65 | 50 | CA8-09 | 65 | 30 |
| KTA9-32S-2.5A | 450 | CA8-09 | 65 | 47 | 65 | 30 | CA8-09 | 65 | 30 |
| KTA9-32S-4.0A | 450 | CA8-09 | 65 | 30 | 65 | 30 | CA8-09 | 65 | 30 |
| KTA9-32S-6.3A | 450 | CA8-09 | 65 | 30 | 65 | 30 | CA8-09 | 65 | 50 |
| KTA9-32S-10A | 450 | CA8-09 | 65 | 30 | 65 | 30 | CA8-09 | 65 | 50 |
| KTA9-32S-16A | 450 | CA8-12 | 30 | 30 | 30 | 30 | CA8-12 | 65 | 50 |
| KTA9-40H + CA8 UL Assemblies (CLE) / (14 x In) | | | | | | | | | |
| KTA9-40H-0.63A | 450 | CA8-09 | 65 | 50 | 65 | 50 | ~ | 65 | 30 |
| KTA9-40H-1.0A | 450 | CA8-09 | 65 | 50 | 65 | 50 | ~ | 65 | 30 |
| KTA9-40H-1.6A | 450 | CA8-09 | 65 | 50 | 65 | 50 | ~ | 65 | 30 |
| KTA9-40H-2.5A | 450 | CA8-09 | 65 | 30 | 65 | 30 | ~ | 65 | 30 |
| KTA9-40H-4.0A | 450 | CA8-09 | 65 | 30 | 65 | 30 | ~ | 65 | 30 |
| KTA9-40H-6.3A | 450 | CA8-09 | 65 | 30 | 65 | 30 | ~ | 65 | 50 |
| KTA9-40H-10A | 450 | CA8-09 | 65 | 30 | 65 | 30 | ~ | 65 | 50 |
| KTA9-40H-16A | 450 | CA8-12 | 65 | 30 | 65 | 30 | ~ | 65 | 50 |

UL 60947 Application Ratings, MPCBs' with Series CA7 Contactors

| KT9 | UL 60947-4-1 | | | | | |
|--|--|------------------------|-----------------------------------|------|-----------------------------------|------|
| | Max. Fuse or Circuit Breaker per NEC [A] | Minimum Contactor Size | Group Motor Installation | | Motor Disconnect | |
| | | | Max. Short-Circuit Current [kA] | | Max. Short-Circuit Current [kA] | |
| | | | 480V | 600V | 480V | 600V |
| KT9-40H + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | |
| KT9-40H-0.16A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-0.25A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-0.40A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-0.63A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-1.0A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-1.6A | 450 | CA7-9 | 65 | 50 | 65 | 50 |
| KT9-40H-2.5A | 450 | CA7-9 | 65 | 30 | 65 | 30 |
| KT9-40H-4.0A | 450 | CA7-9 | 65 | 30 | 65 | 30 |
| KT9-40H-6.3A | 450 | CA7-9 | 65 | 30 | 65 | 30 |
| KT9-40H-10A | 450 | CA7-9 | 65 | 30 | 65 | 30 |
| KT9-40H-16A | 450 | CA7-12 | 65 | 30 | 65 | 30 |
| KT9-40H-20A | 450 | CA7-23 | 65 | 30 | 65 | 30 |
| KT9-40H-25A | 450 | CA7-23 | 50 | 30 | 50 | 30 |
| KT9-40H-29A | 450 | CA7-30 | 50 | 30 | 50 | 30 |
| KT9-40H-32A | 450 | CA7-37 | 50 | 30 | 30 | 18 |
| KT9-40H-36A | 450 | CA7-37 | 30 | 30 | 30 | 18 |
| KT9-40H-40A | 450 | CA7-37 | 30 | 30 | 30 | 18 |
| KT9-45H + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | |
| KT9-45H-25A | 600 | CA7-23 | 65 | 30 | 65 | 30 |
| KT9-45H-32A | 600 | CA7-30 | 65 | 30 | 65 | 30 |
| KT9-45H-45A | 600 | CA7-37 | 65 | 18 | 65 | 18 |

① The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

Type 2 Coordination Ratings, MPCBs' with Series CA7 Contactors

| Cat. No. | | | 400V | | 480V | | 600V | |
|---|------------------------------|--------------------------|---------------------------------|---------------------------------|---------------------------------|------------------------|---------------------------------|------------------------|
| Standard Motor Protection | High Inrush Motor Protection | Motor Circuit Protection | Max. Short-Circuit Current [kA] | Max. Short-Circuit Current [kA] | Max. Short-Circuit Current [kA] | Minimum Contactor Size | Max. Short-Circuit Current [kA] | Minimum Contactor Size |
| KTA9-32S + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | | | |
| KTA9-32S-0.16A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-0.25A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-0.40A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-0.63A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-1.0A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-1.6A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-32S-2.5A | ~ | ~ | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-32S-4.0A | ~ | ~ | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-32S-6.3A | ~ | ~ | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-32S-10A | ~ | ~ | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-32S-16A | ~ | ~ | 50 | CA7-30 | ~ | ~ | ~ | ~ |
| KTA9-32S-20A | ~ | ~ | 50 | CA7-30 | ~ | ~ | ~ | ~ |
| KTA9-32S-25A | ~ | ~ | 15 | CA7-30 | ~ | ~ | ~ | ~ |
| KTA9-32S-29A | ~ | ~ | 15 | CA7-30 | ~ | ~ | ~ | ~ |
| KTA9-32S-32A | ~ | ~ | 15 | CA7-30 | ~ | ~ | ~ | ~ |
| KT_9-40H + CA7 UL Assemblies (CLE) / (14 x In) | | | | | | | | |
| KTA9-40H-0.63A | ~ | ~ | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-1.0A | KTC9-40H-0.63A | KTB9-40H-1.0A | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-1.6A | KTC9-40H-1.0A | KTB9-40H-1.6A | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-2.5A | KTC9-40H-1.6A | KTB9-40H-2.5A | 100 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-4.0A | KTC9-40H-2.5A | KTB9-40H-4.0A | 65 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-6.3A | KTC9-40H-4.0A | KTB9-40H-6.3A | 65 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-10A | KTC9-40H-6.3A | KTB9-40H-10A | 65 | CA7-9 | ~ | ~ | ~ | ~ |
| KTA9-40H-16A | KTC9-40H-10A | KTB9-40H-16A | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-40H-20A | KTC9-40H-16A | KTB9-40H-20A | 65 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-40H-25A | KTC9-40H-20A | KTB9-40H-25A | 50 | CA7-23 | ~ | ~ | ~ | ~ |
| KTA9-40H-29A | KTC9-40H-25A | KTB9-40H-29A | 65 | CA7-30 | ~ | ~ | ~ | ~ |
| KTA9-40H-32A | KTC9-40H-29A | KTB9-40H-32A | 65 | CA7-30/37 | ~ | ~ | ~ | ~ |
| KTA9-40H-36A | KTC9-40H-32A | ~ | 65 | CA7-30/37 | ~ | ~ | ~ | ~ |
| KTA9-40H-40A | KTC9-40H-36A | KTB9-40H-40A | 65 | CA7-30/37 | ~ | ~ | ~ | ~ |
| KT_7-45H + CA7 UL Assemblies (CLE) / (13 x In) | | | | | | | | |
| KTA7-45H-10A | ~ | ~ | 100 | CA7-9 | 65 | CA7-9 | 30 | CA7-30 |
| KTA7-45H-16A | ~ | ~ | 100 | CA7-12 | 65 | CA7-12 | 30 | CA7-30 |
| KTA7-45H-20A | ~ | ~ | 100 | CA7-23 | 65 | CA7-23 | 30 | CA7-30 |
| KTA7-45H-25A | ~ | KTB7-45H-25A | 100 | CA7-30 | 65 | CA7-30 | 30 | CA7-30 |
| KTA7-45H-32A | KTC7-45H-25A | KTB7-45H-32A | 100 | CA7-30 | 65 | CA7-30 | 30 | CA7-30 |
| KTA7-45H-45A | KTC7-45H-32A | KTB7-45H-45A | 100 | CA7-37 | 65 | CA7-37 | 30 | CA7-37 |

F

ECombo Circuit Controllers

Enclosed Motor Controllers and Molded Case Circuit Breakers



KTA9 Type-E Self Protected Manual Motor Controllers
Page F1.57



Explosion-Proof Motor Controllers



KTA9_EX
Page F1.61



KTA9_EZ
Page F1.62

The following pages contain a selection of single enclosed KTA9 & KTC9 motor controllers which can be applied as an individual Manual Self-Protected Combination Motor Controller or as an individual Manual Motor Starter dependent on the ratings of the individual unit.

- A Self-protected Combination Motor Controller (UL508 Construction Type E) performs all the functions of a Manual Combo starter including a UL approved means "Disconnect" with lockable and defeatable handle mechanism, short-circuit protection and overload protection for motor applications.
- A UL508 Manual Motor Controller is a manual motor starter including a motor disconnect combined with an overload relay.

Both can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements. The section that follows includes non-metallic enclosures, metallic enclosures and explosion-proof enclosures.

Enclosed Molded Case Circuit Breakers

The following pages contain a selection of individual enclosed KTU9 molded case circuit breakers for the protection of non-motor loads. KTU9 is a 480Y/277Volt or 600Y/347 volt UL489 approved circuit breaker and the selection of enclosures or combined with matching environmentally approved thru-the-door handle disconnect mechanism which also complies with UL489 standards. KTU9 offers at least 65 KAIC withstand ratings which exceeds those offered by many 600 Volt Class Molded Case Circuit Breakers which



KTU9 Molded Case Circuit Breakers
Page F1.63

are larger and more expensive. Enclosed KTU9 can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements.

Enclosed Type E/F Combination Starters

KTA9 or KTC9 can be applied in combination with a CA7 contactor for remote control and an enclosure with matching environmentally approved thru-the-door handle disconnect mechanism to meet all requirements for a Construction Type E or F Combination Starter. The following pages contain a selection of individual Combo starters which are smaller and less expensive than Classic Construction Type A (Fusible), or Type C (Thermal-magnetic Molded Case Circuit Breaker) as offered in Section C of this catalog. The following types are offered:



CX7 Ecombo KWIKStarters
Page F1.66

- Non-metallic enclosed Combo KwikStarter CX7 and CXU7 with AC or DC coils available as factory assembled or in kit form for field assembly
- Metallic enclosed Combo CX7 and CXU7 with AC or DC coils
- Explosion-proof enclosed CX7 and CXU7 with AC or DC coils

A variety of modifications are available.



CX7 Combination Controllers
Page F1.73

Enclosed KTA9 - IP65

| Amp / Horsepower Rating | | | | Non-metallic (IP65) Enclosure | | Catalog Number ④ | Dimension Code |
|-------------------------|---------|------|---------|-------------------------------|-----------------------|-------------------|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Res. Current | | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-CG | AY |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-CG | AY |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.4A-CG | AY |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-CG | AY |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-CG | AY |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-CG | AY |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-CG | AY |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-CG | AY |
| 1 | 1-1/2 | 3 | 5 ④ | 4.0...6.3 | 88 | KTA9-32S-6.3A-CG | AY |
| 2 | 2 | 5 | 7-1/2 ④ | 6.3...10 | 140 | KTA9-32S-10A-CG | AY |
| 3 | 5 | 10 | 10 ④ | 10...16 | 224 | KTA9-32S-16A-CG | AY |
| 5 ④ | 5 ④ | 10 ④ | 15 ④ | 14.5...20 | 280 | KTA9-32S-20A-CG | AY |
| 5 ④ | 7-1/2 ④ | 15 ④ | 20 ④ | 18...25 | 330 | KTA9-32S-25A-CG | AY |
| 7-1/2 ④ | 10 ④ | 20 ④ | 25 ④ | 24...29 | 406 | KTA9-32S-29A-CG | AY |
| 7-1/2 ④ | 10 ④ | 20 ④ | 30 ④ | 27...32 | 448 | KTA9-32S-32A-CG | AY |



Includes:

- Non-metallic (IP65) enclosure with integrated IP65 operator – watertight, dusttight
- KTA9-32S (Standard Interrupting Capacity) “Type E” Self-protected Combination Manual Controller ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- Gray and black IP65 handle ④⑤

Enclosure Only

| Description | Catalog Number |
|-------------------|----------------|
| Gray/Black handle | KT9-ENN |
| Red/Yellow handle | KT9-ENRY |

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. | |
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -R |
| 1 NO SC+OL + 1 NO Auxiliary | -S |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |


- ① Horsepower ratings shown in the table above are for reference. *The final selection of the controller depends on the actual motor full load current and service factor.*
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② Magnetic trip is fixed at 14x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.
- ③ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.
- ④ A red and yellow handle may be selected instead of the standard gray and black handle. Change “CG” suffix to “CJ”. Ex: Change KTA9-32S-0.16A-CG to KTA9-32S-0.16A-CJ.
- ⑤ Handles are built-in to the enclosure and are not available as components.
- ⑥ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

F Enclosed Motor Circuit Controllers

Enclosed KTA9 - Type 4 / 4X / 12
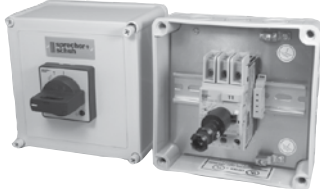
| Amp / Horsepower Rating | | | | Non-metallic, Type 4 / 4X / 12 Enclosure | | | |
|---|---------|------|---------|--|-----------------------|---------------------------|----------|
|  | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ③ | Dim Code |
| | | | | | | | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-VG | Q5 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-VG | Q5 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.40A-VG | Q5 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-VG | Q5 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-VG | Q5 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-VG | Q5 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-VG | Q5 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-VG | Q5 |
| 1 | 1-1/2 | 3 | 5 ④ | 4.0...6.3 | 88 | KTA9-32S-6.3A-VG ④ | Q5 |
| 2 | 2 | 5 | 7-1/2 ④ | 6.3...10 | 140 | KTA9-32S-10A-VG ④ | Q5 |
| 3 | 5 | 10 | 10 ④ | 10...16 | 224 | KTA9-32S-16A-VG ④ | Q5 |
| 5 ④ | 5 ④ | 10 ④ | 15 ④ | 14.5...20 | 280 | KTA9-32S-20A-VG ④ | Q5 |
| 5 ④ | 7-1/2 ④ | 15 ④ | 20 ④ | 18...25 | 330 | KTA9-32S-25A-VG ④ | Q5 |
| 7-1/2 ④ | 10 ④ | 20 ④ | 25 ④ | 24...29 | 406 | KTA9-32S-29A-VG ④ | Q5 |
| 7-1/2 ④ | 10 ④ | 20 ④ | 30 ④ | 27...32 | 448 | KTA9-32S-32A-VG ④ | Q5 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-40H-0.63A-VG | Q6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-40H-1.0A-VG | Q6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-40H-1.6A-VG | Q6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | KTA9-40H-2.5A-VG | Q6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-40H-4.0A-VG | Q6 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | KTA9-40H-6.3A-VG | Q6 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | KTA9-40H-10A-VG | Q6 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA9-40H-16A-VG | Q6 |
| 5 | 5 | 10 | 15 ④ | 14.5...20 | 260 | KTA9-40H-20A-VG ④ | Q6 |
| 5 | 7-1/2 | 15 | 20 ④ | 18...25 | 325 | KTA9-40H-25A-VG ④ | Q6 |
| 7-1/2 | 10 | 20 | 25 ④ | 24...29 | 406 | KTA9-40H-29A-VG ④ | Q6 |
| 7-1/2 | 10 | 20 | 30 ④ | 27...32 | 448 | KTA9-40H-32A-VG ④ | Q6 |
| 10 | 10 | 25 | 30 ④ | 30...36 | 432 | KTA9-40H-36A-VG ④ | Q6 |
| 10 | 10 | 30 | 30 ④ | 34...40 | 480 | KTA9-40H-40A-VG ④ | Q6 |
| KTA7-45H High Interrupting Capacity | | | | | | | |
| 2 | 3 | 5 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-VG | Q7 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-VG | Q7 |
| 5 | 5 | 10 | 15 | 14.5...20 | 260 | KTA7-45H-20A-VG | Q7 |
| 7-1/2 | 7-1/2 | 15 | 20 | 18...25 | 325 | KTA7-45H-25A-VG | Q7 |
| 7-1/2 | 10 | 20 | 30 | 23...32 | 416 | KTA7-45H-32A-VG | Q7 |
| 10 | 15 | 30 | 40 ④ | 32...45 | 585 | KTA7-45H-45A-VG | Q7 |

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTA9 “Type E” Self-protected Combination Manual Controller (Standard Interrupting Capacity) ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ④

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. | |
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC | -R |
| 1 NO SC+OL + 1 NO | -S |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes(*)

| AC Coil Code | Voltage Range | | | |
|--------------|---------------|-------------|------------|-------------|
| | KT9 | | KT7 | |
| | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| 24V | 24V | 28V | ~ | 24V |
| 120V | 105V | 120V | ~ | 120V |
| 230V | 220...230V | ~ | 220-230V | ~ |
| 240V | ~ | 240...260V | ~ | 240...260V |
| 277V | ~ | ~ | ~ | 277V |
| 460V | 380...400V | ~ | 380...400V | ~ |
| 480V | 415V | 480V | 415V | 480V |
| 500V | ~ | ~ | 500V | 575V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

③ A red and yellow handle may be selected instead of the standard gray and black handle. Change “VG” suffix to “VJ”. Ex: Change KTA9-32S-0.16-VG to KTA9-32S-0.16-VJ.

④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA9 - Type 12

| Amp / Horsepower Rating | | | | Painted Steel, Type 12 Enclosure | | Catalog Number ④ | Dim Code |
|--|---------|------|---------|----------------------------------|-----------------------|--------------------|----------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Res. Current | | |
| Three Phase | | | | | | 200V | 230V |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-DG | L |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-DG | L |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.40A-DG | L |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-DG | L |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-DG | L |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-DG | L |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-DG | L |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-DG | L |
| 1 | 1-1/2 | 3 | 5 ④ | 4.0...6.3 | 88 | KTA9-32S-6.3A-DG ④ | L |
| 2 | 2 | 5 | 7-1/2 ④ | 6.3...10 | 140 | KTA9-32S-10A-DG ④ | L |
| 3 | 5 | 10 | 10 ④ | 10...16 | 224 | KTA9-32S-16A-DG ④ | L |
| 5 ④ | 5 ④ | 10 ④ | 15 ④ | 14.5...20 | 280 | KTA9-32S-20A-DG ④ | L |
| 5 ④ | 7-1/2 ④ | 15 ④ | 20 ④ | 18...25 | 330 | KTA9-32S-25A-DG ④ | L |
| 7-1/2 ④ | 10 ④ | 20 ④ | 25 ④ | 24...29 | 406 | KTA9-32S-29A-DG ④ | L |
| 7-1/2 ④ | 10 ④ | 20 ④ | 30 ④ | 27...32 | 448 | KTA9-32S-32A-DG ④ | L |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-40H-0.63A-DG | L |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-40H-1.0A-DG | L |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-40H-1.6A-DG | L |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | KTA9-40H-2.5A-DG | L |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-40H-4.0A-DG | L |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | KTA9-40H-6.3A-DG | L |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | KTA9-40H-10A-DG | L |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA9-40H-16A-DG | L |
| 5 | 5 | 10 | 15 ④ | 14.5...20 | 260 | KTA9-40H-20A-DG ④ | L |
| 5 | 7-1/2 | 15 | 20 ④ | 18...25 | 325 | KTA9-40H-25A-DG ④ | L |
| 7-1/2 | 10 | 20 | 25 ④ | 24...29 | 406 | KTA9-40H-29A-DG ④ | L |
| 7-1/2 | 10 | 20 | 30 ④ | 27...32 | 448 | KTA9-40H-32A-DG ④ | L |
| 10 | 10 | 25 | 30 ④ | 30...36 | 432 | KTA9-40H-36A-DG ④ | L |
| 10 | 10 | 30 | 30 ④ | 34...40 | 480 | KTA9-40H-40A-DG ④ | L |



Includes:

- Type 12 enclosure – dusttight
- KTA9 “Type E” Self-protected Combination Manual Controller ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ④

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. | |
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC | -R |
| 1 NO SC+OL + 1 NO | -S |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | | | |
|--------------|---------------|------------|----------|----------|
| | KT9 | | KT7 | |
| | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| 24V | 24V | 28V | 21V | 24V |
| 120V | ~ | 120V | ~ | 120V |
| 127V | 110V | 127V | ~ | 120V |
| 230V | 220...230V | ~ | 220-230V | ~ |
| 240V | ~ | 240...260V | ~ | 240-260V |
| 277V | ~ | ~ | ~ | 277V |
| 460V | 380...400V | ~ | 380-400V | ~ |
| 480V | 415V | 480V | 415V | 480V |
| 500V | ~ | ~ | 500V | 575V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.


- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change “DG” suffix to “DJ”. Ex: Change KTA9-32S-0.16-DG to KTA9-32S-0.16-DJ.

⑤ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA9 - Type 4 / 12
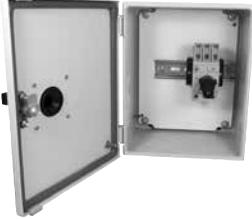
| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | | |
|---|---------|------|---------|-------------|--------------------------------------|-----------------------|------------------|----------|
|  | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ③ | Dim Code |
| | | | | | | | | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.40A-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-WG | W6 | |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-WG | W6 | |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-WG | W6 | |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-WG | W6 | |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-WG | W6 | |
| 1 | 1-1/2 | 3 | 5 ④ | 4.0...6.3 | 88 | KTA9-32S-6.3A-WG ④ | W6 | |
| 2 | 2 | 5 | 7-1/2 ④ | 6.3...10 | 140 | KTA9-32S-10A-WG ④ | W6 | |
| 3 | 5 | 10 | 10 ④ | 10...16 | 224 | KTA9-32S-16A-WG ④ | W6 | |
| 5 ④ | 5 ④ | 10 ④ | 15 ④ | 14.5...20 | 280 | KTA9-32S-20A-WG ④ | W6 | |
| 5 ④ | 7-1/2 ④ | 15 ④ | 20 ④ | 18...25 | 330 | KTA9-32S-25A-WG ④ | W6 | |
| 7-1/2 ④ | 10 ④ | 20 ④ | 25 ④ | 24...29 | 406 | KTA9-32S-29A-WG ④ | W6 | |
| 7-1/2 ④ | 10 ④ | 20 ④ | 30 ④ | 27...32 | 448 | KTA9-32S-32A-WG ④ | W6 | |
| KTA9-40H High Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-40H-0.63A-VG | W6 | |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-40H-1.0A-VG | W6 | |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-40H-1.6A-VG | W6 | |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | KTA9-40H-2.5A-WG | W6 | |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-40H-4.0A-WG | W6 | |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | KTA9-40H-6.3A-WG | W6 | |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | KTA9-40H-10A-WG | W6 | |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA9-40H-16A-WG | W6 | |
| 5 | 5 | 10 | 15 ④ | 14.5...20 | 260 | KTA9-40H-20A-WG ④ | W6 | |
| 5 | 7-1/2 | 15 | 20 ④ | 18...25 | 325 | KTA9-40H-25A-WG ④ | W6 | |
| 7-1/2 | 10 | 20 | 25 ④ | 24...29 | 406 | KTA9-40H-29A-WG ④ | W6 | |
| 7-1/2 | 10 | 20 | 30 ④ | 27...32 | 448 | KTA9-40H-32A-WG ④ | W6 | |
| 10 | 10 | 25 | 30 ④ | 30...36 | 432 | KTA9-40H-36A-WG ④ | W6 | |
| 10 | 10 | 30 | 30 ④ | 34...40 | 480 | KTA9-40H-40A-WG ④ | W6 | |
| KTA7-45H High Interrupting Capacity | | | | | | | | |
| 2 | 3 | 5 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-WG | R/F | |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-WG | R/F | |
| 5 | 5 | 10 | 15 | 14.5...20 | 260 | KTA7-45H-20A-WG | R/F | |
| 7-1/2 | 7-1/2 | 15 | 20 | 18...25 | 325 | KTA7-45H-25A-WG | R/F | |
| 7-1/2 | 10 | 20 | 30 | 23...32 | 416 | KTA7-45H-32A-WG | R/F | |
| 10 | 15 | 30 | 40 ④ | 32...45 | 585 | KTA7-45H-45A-WG ④ | R/F | |

Includes:

- Type 4 / 12 enclosure – watertight, dusttight
- KTA9 “Type E” Self-protected Combination Manual Controller ④
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ⑤

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. | |
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC | -R |
| 1 NO SC+OL + 1 NO | -S |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | | | |
|--------------|---------------|------------|------------|------------|
| | KT9 | | KT7 | |
| | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| 24V | 24V | 28V | ~ | 24V |
| 120V | 105V | 120V | ~ | 120V |
| 230V | 220...230V | ~ | 220-230V | ~ |
| 240V | ~ | 240...260V | ~ | 240...260V |
| 277V | ~ | ~ | ~ | 277V |
| 460V | 380...400V | ~ | 380...400V | ~ |
| 480V | 415V | 480V | 415V | 480V |
| 500V | ~ | ~ | 500V | 575V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

- ② KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.
- ③ A red and yellow handle may be selected instead of the standard gray and black handle. Change “WG” suffix to “WJ”. Ex: Change KTA9-32S-0.16-WG to KTA9-32S-0.16-WJ.
- ④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

KTA9 Explosion Proof Motor Controllers - NEMA Type 7/9

| Amp / Horsepower Rating | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number | Dim Code |
|--|---------|------|---------|-------------|------------------------|---------------------------|----------------|----------|
| Max. Horsepower ①② | | | | | | | | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-EX | EX | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-EX | EX | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.4A-EX | EX | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-EX | EX | |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-EX | EX | |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-EX | EX | |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-EX | EX | |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-EX | EX | |
| 1 | 1-1/2 | 3 | 5 ③ | 4.0...6.3 | 88 | KTA9-32S-6.3A-EX ③ | EX | |
| 2 | 2 | 5 | 7-1/2 ③ | 6.3...10 | 140 | KTA9-32S-10A-EX ③ | EX | |
| 3 | 5 | 10 | 10 ③ | 10...16 | 224 | KTA9-32S-16A-EX ③ | EX | |
| 5 ③ | 5 ③ | 10 ③ | 15 ③ | 14.5...20 | 280 | KTA9-32S-20A-EX ③ | EX | |
| 5 ③ | 7-1/2 ③ | 15 ③ | 20 ③ | 18...25 | 330 | KTA9-32S-25A-EX ③ | EX | |
| 7-1/2 ③ | 10 ③ | 20 ③ | 25 ③ | 24...29 | 406 | KTA9-32S-29A-EX ③ | EX | |
| 7-1/2 ③ | 10 ③ | 20 ③ | 30 ③ | 27...32 | 448 | KTA9-32S-32A-EX ③ | EX | |



Includes:

- Class I, Div 1, 2, Group C, D
Class II, Div 1, 2, Group E, F & G enclosure
Class III
NEMA Type 7/9
- KTA9 "Type E" Self-protected Combination Manual Motor Controller ④
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|--|---------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. 1 NO Auxiliary 1 NC Auxiliary 1 NO + 1 NC Auxiliary 2 NO Auxiliaries | -B -A -C -D |
| 1 NO SC+OL + 1 NC 1 NO SC+OL + 1 NO | -R -S |
| Side Mount 600V max. 2 NC Auxiliaries 2 NO Auxiliaries 1 NO + 1 NC Auxiliary | -AS02 -AS20 -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. 1 NO SC+OL+1 NO SC 1 NO SC+OL+1 NC SC 1 NC SC+OL+1 NO SC | -R00 -R01 -R10 |
| Accessories Undervoltage Release Module Shunt Release Module | -UA-* -AA-* |
| Enclosure Modifications Breather/Drain | -BD |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.


- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-0.40A.

- ② KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.
- ③ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.
- ④ -UA* and -AA* options not possible in the -EX Enclosure.

F Enclosed Motor Circuit Controllers

KTA9 Explosion Proof Motor Controllers – NEMA Type 4/7/9 with Gasket

| Amp / Horsepower Rating | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ③ | Dim Code |
|--|-------|------|-------|------------------------|-----------------------|-------------------|----------|
| Max. Horsepower ①② | | | | | | | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | KTA9-32S-0.16A-EY | EY |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | KTA9-32S-0.25A-EY | EY |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | KTA9-32S-0.40A-EY | EY |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-32S-0.63A-EY | EY |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-32S-1.0A-EY | EY |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-32S-1.6A-EY | EY |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | KTA9-32S-2.5A-EY | EY |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-32S-4.0A-EY | EY |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 88 | KTA9-32S-6.3A-EY | EY |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 140 | KTA9-32S-10A-EY | EY |
| 3 | 5 | 10 | 10 | 10...16 | 224 | KTA9-32S-16A-EY | EY |
| 5 | 5 | 10 | 15 | 14.5...20 | 280 | KTA9-32S-20A-EY | EY |
| 5 | 7-1/2 | 15 | 20 | 18...25 | 330 | KTA9-32S-25A-EY | EY |
| 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA9-32S-29A-EY | EY |
| 7-1/2 | 10 | 20 | 30 | 27...32 | 448 | KTA9-32S-32A-EY | EY |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | KTA9-40H-0.63A-EY | EY |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | KTA9-40H-1.0A-EY | EY |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | KTA9-40H-1.6A-EY | EY |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | KTA9-40H-2.5A-EY | EY |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | KTA9-40H-4.0A-EY | EY |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | KTA9-40H-6.3A-EY | EY |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | KTA9-40H-10A-EY | EY |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA9-40H-16A-EY | EY |
| 5 | 5 | 10 | 15 | 14.5...20 | 260 | KTA9-40H-20A-EY | EY |
| 5 | 7-1/2 | 15 | 20 | 18...25 | 325 | KTA9-40H-25A-EY | EY |
| 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA9-40H-29A-EY | EY |
| 7-1/2 | 10 | 20 | 30 | 27...32 | 448 | KTA9-40H-32A-EY | EY |
| 10 | 10 | 25 | 30 | 30...36 | 432 | KTA9-40H-36A-EY | EY |
| 10 | 10 | 30 | 30 | 34...40 | 480 | KTA9-40H-40A-EY | EY |
| KTA7-45H High Interrupting Capacity | | | | | | | |
| 2 | 3 | 5 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-EZ | EZ |
| 3 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-EZ | EZ |
| 5 | 5 | 10 | 15 | 14.5...20 | 260 | KTA7-45H-20A-EZ | EZ |
| 7-1/2 | 7-1/2 | 15 | 20 | 18...25 | 325 | KTA7-45H-25A-EZ | EZ |
| 7-1/2 | 10 | 20 | 30 | 23...32 | 416 | KTA7-45H-32A-EZ | EZ |
| 10 | 15 | 30 | 40 | 32...45 | 585 | KTA7-45H-45A-EZ | EZ |



EY Enclosure shown

Includes:

- Class I, Div 1, 2, Group C, D
Class II, Div 1, 2, Group E, F & G enclosure
Class III
- NEMA Type 4/7/9
- KTA9 "Type E" Self-protected Combination Manual Motor Controller ③
- Terminal Adaptor for Type E Applications
(Cat.# KT9-40-TE or KT7-45-TE)

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|--|----------------------------------|
| KT9 Auxiliaries & Trip Contacts, Front Mount 250V max. 1 NO Auxiliary 1 NC Auxiliary 1 NO + 1 NC Auxiliary 2 NO Auxiliaries 1 NO SC+OL + 1 NC 1 NO SC+OL + 1 NO | -B -A -C -D -R -S |
| Side Mount 600V max. 2 NC Auxiliaries 2 NO Auxiliaries 1 NO + 1 NC Auxiliary | -AS02 -AS20 -AS11 |
| Additional KT9 Trip Contacts, Side Mount 600V max. 1 NO SC+OL+1 NO SC 1 NO SC+OL+1 NC SC 1 NC SC+OL+1 NO SC | -R00 -R01 -R10 |
| Accessories Undervoltage Release Module Shunt Release Module | -UA-* -AA-* |
| Enclosure Modifications Breather/Drain | -BD |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | | | |
|--------------|---------------|------------|------------|------------|
| | KT9 | | KT7 | |
| | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| 24V | 24V | 28V | 21V | 24V |
| 120V | ~ | 120V | ~ | 120V |
| 230V | 220...230V | ~ | 220-230V | ~ |
| 240V | ~ | 240...260V | ~ | 240...260V |
| 277V | ~ | ~ | ~ | 250V |
| 460V | 380...400V | ~ | 380...400V | ~ |
| 480V | 415V | 480V | 415V | 480V |
| 575V | ~ | ~ | 500V | 575V |

① Horsepower ratings shown in the table above are for reference. *The final selection of the controller depends on the actual motor full load current and service factor.*

• For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote ① for device selection criteria.

③ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTU9 Circuit Breaker - Type 4 / 4X / 12

| Amp / Interrupt Rating | | | | | Non-metallic, Type 4 / 4X / 12 Enclosure | |
|---|------------------------|---------------------------------|------------|------------|---|----------------|
| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number | Dimension Code |
| | | 240V | 480Y /277V | 600Y /347V | | |
| KTU9-D — High Interrupting Capacity – 2-Pole | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-0.5-VG | Q6 ① |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-1-VG | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-2-VG | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-3-VG | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-4-VG | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-5-VG | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-6-VG | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-8-VG | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-10-VG | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-12-VG | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-15-VG | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-20-VG | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-25-VG | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-30-VG | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-2D-35-VG | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-2D-40-VG | |
| KTU9-D — High Interrupting Capacity – 3-Pole | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-0.5-VG | Q6 ① |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-1-VG | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-2-VG | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-3-VG | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-4-VG | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-5-VG | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-6-VG | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-8-VG | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-10-VG | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-12-VG | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-15-VG | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-20-VG | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-25-VG | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-30-VG | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-3D-35-VG | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-3D-40-VG | |



Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN Series E) ②

Modifications (Factory Assembled) ③

| KT9 Auxiliaries & Trip Contacts - Front Mount 250V max. | Add Suffix to Cat. Number |
|---|---------------------------|
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -R |
| 1 NO SC+OL + 1 NO Auxiliary | -S |

① KTU9 is 80% rated in this enclosure.
 ② A red and yellow handle may be selected instead of the standard black handle. Change "VG" suffix to "VJ". Ex: Change KTU9-40H-2D-0.16-VG to KTU9-40H-2D-0.16-VJ.
 ③ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed KTU9 Circuit Breaker - Type 12

| Fixed Thermal Current Rating [A] | | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number | Dim Code |
|--|------------------------|-------------------|---------------------------------|------------|--------------------|----------------|----------|
| | | | 240V | 480Y /277V | 600Y /347V | | |
| KTU9-40H-2D — High Interrupting Capacity – 2-Pole | | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-0.5-DG | L ① | |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-1-DG | | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-2-DG | | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-3-DG | | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-4-DG | | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-5-DG | | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-6-DG | | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-8-DG | | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-10-DG | | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-12-DG | | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-15-DG | | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-20-DG | | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-25-DG | | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-30-DG | | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-2D-35-DG | | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-2D-40-DG | | |
| KTU9-40H-3D — High Interrupting Capacity – 3-Pole | | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-0.5-DG | L ① | |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-1-DG | | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-2-DG | | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-3-DG | | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-4-DG | | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-5-DG | | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-6-DG | | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-8-DG | | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-10-DG | | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-12-DG | | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-15-DG | | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-20-DG | | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-25-DG | | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-30-DG | | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-3D-35-DG | | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-3D-40-DG | | |

Painted Steel, Type 12 Enclosure



Includes:

- Type 12 enclosure – dusttight
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ②

Modifications (Factory Assembled) ③

| KT9 Auxiliaries & Trip Contacts - Front Mount 250V max. | Add Suffix to Cat. Number |
|---|---------------------------|
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -R |
| 1 NO SC+OL + 1 NO Auxiliary | -S |

① KTU9 is 80% rated in this enclosure.

② A red and yellow handle may be selected instead of the standard black handle. Change “DG” suffix to “DJ”. Ex: Change KTU9-40H-2D-0.16-DG to KTU9-D-2D-0.16-DJ.

③ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed KTU9 Circuit Breaker - Type 4 / 12

| Amp / Interrupt Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | |
|--|------------------------|---------------------------------|------------|------------|--------------------------------------|----------------|
| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number | Dimension Code |
| | | 240V | 480Y /277V | 600Y /347V | | |
| KTU9-40H-2D — High Interrupting Capacity – 2-Pole | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-0.5-WG | W6 ① |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-1-WG | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-2-WG | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-3-WG | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-4-WG | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-5-WG | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-6-WG | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-8-WG | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-2D-10-WG | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-12-WG | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-2D-15-WG | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-20-WG | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-25-WG | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-2D-30-WG | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-2D-35-WG | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-2D-40-WG | |
| KTU9-40H-3D — High Interrupting Capacity – 3-Pole | | | | | | |
| 0.5 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-0.5-WG | W6 ① |
| 1.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-1-WG | |
| 2.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-2-WG | |
| 3.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-3-WG | |
| 4.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-4-WG | |
| 5.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-5-WG | |
| 6.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-6-WG | |
| 8.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-8-WG | |
| 10.0 | 15...20xI _n | 100 | 100 | 50 | KTU9-40H-3D-10-WG | |
| 12.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-12-WG | |
| 15.0 | 15...20xI _n | 65 | 65 | 25 | KTU9-40H-3D-15-WG | |
| 20.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-20-WG | |
| 25.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-25-WG | |
| 30.0 | 15...20xI _n | 65 | 65 | ~ | KTU9-40H-3D-30-WG | |
| 35.0 | 14 x I _n | 65 | 65 | ~ | KTU9-40H-3D-35-WG | |
| 40.0 | 12 x I _n | 65 | 65 | ~ | KTU9-40H-3D-40-WG | |



Includes:


- Type 4/12 enclosure – watertight, dusttight
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ②

Modifications (Factory Assembled) ③

| KT9 Auxiliaries & Trip Contacts - Front Mount 250V max. | Add Suffix to Cat. Number |
|---|---------------------------|
| 1 NO Auxiliary | -B |
| 1 NC Auxiliary | -A |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -R |
| 1 NO SC+OL + 1 NO Auxiliary | -S |

① KTU9 up to 15 Amp is 100% rated in this enclosure. KTU9 20...30 Amp is 80% rated.
 ② A red and yellow handle may be selected instead of the standard black handle. Change "WG" suffix to "WJ". Ex: Change KTU9-40H-2D-0.16-WG to KTU9-40H-2D-0.16-WJ.
 ③ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ⑥⑦

| Amp / Horsepower Rating | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | | |
|---|-------|------|-------|--|---------------------------|-----------------------------------|----------|
|  | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ④③③③ | Dim Code |
| | | | | | | | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9-10-*-AS0.16A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9-10-*-AS0.25A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9-10-*-AS0.4A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*-AS0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*-AS1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*-AS1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CX7-9-10-*-AS2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*-AS4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CX7-9-10-*-AS6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CX7-12-10-*-AS10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CX7-16-10-*-AS16A-A10-PG▼ | Q4 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*-AH0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*-AH1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*-AH1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CX7-9-10-*-AH2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*-AH4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CX7-9-10-*-AH6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CX7-12-10-*-AH10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CX7-16-10-*-AH16A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CX7-23-10-*-AH20A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-23-10-*-AH25A-A10-PG▼ | Q4 |

Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ③
- Power wiring
- Factory installed Pilot device option ⑥

*Replace ▼ with option code.
See page F1.71 for
factory installed modifications*

Contactor

AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|---------------|-----------------|-----------------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ④ Other voltages available, see Section A in this catalog.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑥ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

- ⑦ CPT not possible with KS7-COC4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-*-AS0.16A-A10-PG▼ to CX7-9-10-*-AS0.16A-A10-PJ▼.
- ⑨ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ④⑥⑦

| Amp / Horsepower Rating | | | | | O/L Relay Ampere Range | | Magnetic Response Current | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | Dim Code |
|--|-------|------|-------|-------------|------------------------|---------------------------|--------------------------------------|--|----------|----------|
| | | | | | | | | Catalog Number ④⑥⑧ | | |
| Max. Horsepower ①②③ | | | | Three Phase | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ④⑥⑧ | | Dim Code | |
| 200V | 230V | 460V | 575V | | | | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9E-10- * -AS0.16A-A10-PG▼ | Q4 | | |
| ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9E-10- * -AS0.25A-A10-PG▼ | Q4 | | |
| ~ | ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9E-10- * -AS0.4A-A10-PG▼ | Q4 | | |
| ~ | ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9E-10- * -AS0.63A-A10-PG▼ | Q4 | | |
| ~ | ~ | 1/2 | 1/2 | ~ | 0.63...1.0 | 14 | CX7-9E-10- * -AS1.0A-A10-PG▼ | Q4 | | |
| ~ | ~ | 3/4 | ~ | ~ | 1.0...1.6 | 22 | CX7-9E-10- * -AS1.6A-A10-PG▼ | Q4 | | |
| 1/2 | 1/2 | 1 | 1-1/2 | ~ | 1.6...2.5 | 35 | CX7-9E-10- * -AS2.5A-A10-PG▼ | Q4 | | |
| 3/4 | 3/4 | 2 | 3 | ~ | 2.5...4.0 | 52 | CX7-9E-10- * -AS4.0A-A10-PG▼ | Q4 | | |
| 1 | 1-1/2 | 3 | ~ | ~ | 4.0...6.3 | 88 | CX7-9E-10- * -AS6.3A-A10-PG▼ | Q4 | | |
| 2 | 2 | 5 | ~ | ~ | 6.3...10 | 140 | CX7-12E-10- * -AS10A-A10-PG▼ | Q4 | | |
| 3 | 5 | 10 | ~ | ~ | 10...16 | 224 | CX7-16E-10- * -AS16A-A10-PG▼ | Q4 | | |
| KTA9-40H High Interrupting Capacity | | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9E-10- * -AH0.63A-A10-PG▼ | Q4 | | |
| ~ | ~ | 1/2 | 1/2 | ~ | 0.63...1.0 | 14 | CX7-9E-10- * -AH1.0A-A10-PG▼ | Q4 | | |
| ~ | ~ | 3/4 | ~ | ~ | 1.0...1.6 | 22 | CX7-9E-10- * -AH1.6A-A10-PG▼ | Q4 | | |
| 1/2 | 1/2 | 1 | 1-1/2 | ~ | 1.6...2.5 | 33 | CX7-9E-10- * -AH2.5A-A10-PG▼ | Q4 | | |
| 3/4 | 3/4 | 2 | 3 | ~ | 2.5...4.0 | 52 | CX7-9E-10- * -AH4.0A-A10-PG▼ | Q4 | | |
| 1 | 1-1/2 | 3 | 5 | ~ | 4.0...6.3 | 82 | CX7-9E-10- * -AH6.3A-A10-PG▼ | Q4 | | |
| 2 | 2 | 5 | 7-1/2 | ~ | 6.3...10 | 130 | CX7-12E-10- * -AH10A-A10-PG▼ | Q4 | | |
| 3 | 5 | 10 | 10 | ~ | 10...16 | 208 | CX7-16E-10- * -AH16A-A10-PG▼ | Q4 | | |
| 5 | 5 | 10 | ~ | ~ | 14.5...20 | 260 | CX7-23E-10- * -AH20A-A10-PG▼ | Q4 | | |
| 5 | 7-1/2 | 15 | ~ | ~ | 18...25 | 325 | CX7-23E-10- * -AH25A-A10-PG▼ | Q4 | | |



Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactors (for remote operation), with Electronic DC Coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB) + KT9-KN ③
- Power wiring
- Factory installed Pilot device option ⑥

*Replace ▼ with option code.
See page F1.71 for factory installed modifications*

Contactors Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 012E | 12V |
| 024E | 24V |
| 036E | 36-48V |
| 048E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |


KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ④ CX7-9E...23E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

- ⑥ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.
- ⑦ CPT not possible with KS7-COC4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-*****-AS0.16A-A10-PG▼ to CX7-9-10-*****-AS0.16A-A10-PJ▼.

F Enclosed Motor Circuit Controllers

Enclosed Non-Reversing Combination Controller with E-Stop, AC Operation - Type 1/12K/IP66 ①⑦③

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R) | | |
|--|-------|------|-------|------------------------|---|--------------------------------------|----------|
| | | | | |  | | |
| Max. Horsepower ②③④ | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ⑤⑦⑨⑩ | Dim Code |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9-10-*-AS0.16A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9-10-*-AS0.25A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9-10-*-AS0.4A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*-AS0.63A-A10-PG4U-9 | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*-AS1.0A-A10-PG4U-9 | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*-AS1.6A-A10-PG4U-9 | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CX7-9-10-*-AS2.5A-A10-PG4U-9 | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*-AS4.0A-A10-PG4U-9 | Q4 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CX7-9-10-*-AS6.3A-A10-PG4U-9 | Q4 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CX7-12-10-*-AS10A-A10-PG4U-9 | Q4 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CX7-16-10-*-AS16A-A10-PG4U-9 | Q4 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*-AH0.63A-A10-PG4U-9 | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*-AH1.0A-A10-PG4U-9 | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*-AH1.6A-A10-PG4U-9 | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CX7-9-10-*-AH2.5A-A10-PG4U-9 | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*-AH4.0A-A10-PG4U-9 | Q4 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CX7-9-10-*-AH6.3A-A10-PG4U-9 | Q4 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CX7-12-10-*-AH10A-A10-PG4U-9 | Q4 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CX7-16-10-*-AH16A-A10-PG4U-9 | Q4 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CX7-23-10-*-AH20A-A10-PG4U-9 | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-23-10-*-AH25A-A10-PG4U-9 | Q4 |

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R) ①
- KTA9 “Type E/F” Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Multifunction 2-position Push Button and Emergency Stop ⑦
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ③
- Power wiring

This is a factory assembly.

Optional factory modifications are not available on this device.

Contactor

AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|---------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals “L1” and “L2” (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① This is a factory assembly. The KS7-C0C4R does not include knock-outs for field assembly of this starter.
- ② Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ③ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ④ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ⑤ Other voltages available, see Section A in this catalog.
- ⑥ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑦ Uses D7P-U2EFFEPX11 Two-Position Multifunction push button with legend I/O and D7P-MT44PX01 Emergency Stop Push Button.

- ⑧ CPT not possible with KS7-C0C4R. Refer page F1.87 for dimensional information.
- ⑨ A red and yellow handle may be selected instead of the standard gray and black handle. Change “PG” suffix to “PJ”. Ex: CX7-9-10-*-AS0.16A-A10-PG4U-9 becomes CX7-9-10-*-AS0.16A-A10-PJ4U-9.
- ⑩ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, AC Operation - Type 1/12K/IP66

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | Dim Code |
|--|-------|------|-------|------------------------|--|-----------------------------|----------|
| Max. Horsepower | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXU7-9-10-*-AS0.16A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXU7-9-10-*-AS0.25A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXU7-9-10-*-AS0.4A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9-10-*-AS0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9-10-*-AS1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9-10-*-AS1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXU7-9-10-*-AS2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9-10-*-AS4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXU7-9-10-*-AS6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXU7-12-10-*-AS10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXU7-16-10-*-AS16A-A10-PG▼ | Q4 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9-10-*-AH0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9-10-*-AH1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9-10-*-AH1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXU7-9-10-*-AH2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9-10-*-AH4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXU7-9-10-*-AH6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXU7-12-10-*-AH10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXU7-16-10-*-AH16A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXU7-23-10-*-AH20A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXU7-23-10-*-AH25A-A10-PG▼ | Q4 |

Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R)



Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN)
- Power wiring
- Factory installed Pilot device option

Replace ▼ with option code. See page F1.71 for factory installed modifications

Contactor AC Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 | 440V | 480V |
| 0600 | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ❶ Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ❸ CXU7 may be applied to single phase loads. Contact factory for specifications.
- ❹ Other voltages available, see Section A in this catalog.
- ❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

- ❼ CPT not possible with KS7-COC4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.
- ❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-*-AS0.16A-A10-PG▼ to CXU7-9-10-*-AS0.16A-A10-PJ▼.
- ❾ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ④⑥⑦

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | |
|--|-------|------|-------|------------------------|--|-----------------------------|----------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ④⑥⑧ | Dim Code |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXU7-9E-22-*AS0.16A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXU7-9E-22-*AS0.25A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXU7-9E-22-*AS0.4A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9E-22-*AS0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9E-22-*AS1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9E-22-*AS1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXU7-9E-22-*AS2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9E-22-*AS4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXU7-9E-22-*AS6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXU7-12E-22-*AS10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXU7-16E-22-*AS16A-A10-PG▼ | Q4 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9E-22-*AH0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9E-22-*AH1.0A-A10-PG▼ | Q4 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9E-22-*AH1.6A-A10-PG▼ | Q4 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXU7-9E-22-*AH2.5A-A10-PG▼ | Q4 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9E-22-*AH4.0A-A10-PG▼ | Q4 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXU7-9E-22-*AH6.3A-A10-PG▼ | Q4 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXU7-12E-22-*AH10A-A10-PG▼ | Q4 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXU7-16E-22-*AH16A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXU7-23E-22-*AH20A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXU7-23E-22-*AH25A-A10-PG▼ | Q4 |



Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-25-TE)
- CA7 contactors (for remote operation), with Electronic DC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ③
- Power wiring
- Factory installed Pilot device option ⑥

*Replace ▼ with option code.
See page F1.71 for
factory installed modifications*

Contactor Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 012E | 12V |
| 024E | 24V |
| 036E | 36-48V |
| 048E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ③ CXU7 may be applied to single phase loads. Contact factory for these specifications.
- ④ CXU7-9E...23E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

- ⑥ One Pilot Device option must be selected. Blanks are not available. Plastic Bezel is standard. Pilot Device options include D7-BX Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.
- ⑦ CPT not possible with KS7-COC4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-*AS0.16A-A10-PG▼ to CXU7-9-10-*AS0.16A-A10-PJ▼.

Enclosed Motor Circuit Controllers

CX7 Non-Reversing Controller Modifications

| Pilot Device Options - required | |
|--|----------------------------------|
| Select one option only ①②③ | Replace ▼ in catalog number with |
| START-STOP Multi-function | 3U |
| I-O Multi-function | 4U |
| OFF-ON 2-Position Selector switch | 6 |
| HAND-OFF-AUTO 3-Position Selector switch | 7 |
| Run Pilot Light Green | 1G |
| Run Pilot Light Red | 1R |
| Overload Alarm Pilot Light | 1Y |
| D7-N8 22mm Hole Plug | 0 |
| Additional KT9 Auxiliaries & Trip Contacts | |
| Front Mount 250V maximum | |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

CX7 Non-Reversing Controller Additions

| Addition | Add to end of catalog number |
|---|------------------------------|
| CA7 Contactor Accessories | |
| Electronic Interface ④ | -JE |
| Surge Suppressor RC | -RC |
| Surge Suppressor Varistor | -V |
| CA7 Auxiliary Contacts ⑤⑥ | |
| 1 NO Auxiliary | -\$10 |
| 1 NC Auxiliary | -\$01 |
| 1 NO + 1 NC Auxiliary | -\$11 |
| 2 NO Auxiliaries | -\$20 |
| 2 NC Auxiliaries | -\$02 |
| Alternate Aux. Contact Arrangement (CA7 only) | |
| 1 NC in lieu of standard 1 NO | -\$X10 |
| 2 NC in lieu of standard 2 NO (on CXU7 only) | -\$X2 |
| Unwired Terminal Blocks Specify quantity (▼) | -▼TB |

CXU7 Reversing Controller Modifications

| Pilot Device Options - required | |
|--|----------------------------------|
| Select one option only ①②③ | Replace ▼ in catalog number with |
| FOR-STOP-REV Multi-function | 3U |
| UP-STOP-DOWN Multi-function | 4U |
| OPEN-STOP-CLOSE Multi-function | 5U |
| FOR-STOP-REV 3-Position Selector switch | 6 |
| UP-OFF-DOWN 3-Position Selector switch | 7 |
| OPEN-OFF-CLOSE 3-Position Selector switch | 8 |
| Overload Alarm Pilot Light | 1Y |
| D7-N8 22mm Hole Plug | 0 |
| Additional KT7 Auxiliaries & Trip Contacts | |
| Front Mount 250V maximum | |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

CXU7 Reversing Controller Additions

| Addition | Add to end of catalog number |
|---------------------------|------------------------------|
| CA7 Contactor Accessories | |
| Electronic Interface ④ | -JE |
| Surge Suppressor RC | -RC |
| Surge Suppressor Varistor | -V |


- ① KS7-C0C4R only has (1) 22mm hole to accommodate (1) pilot device.
- ② Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").
- ③ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 380 VAC...575VAC require a control circuit

- transformer.
- ④ CRI7E-24 will be used. CRI7E-12 by special order only.
- ⑤ See page A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
- ⑥ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.




F
Enclosed Motor Circuit Controllers

COMING SOON





CX7 KWIKstarter Enclosures for use with KTA7 Type E Motor Controllers and CA7 Contactors ①③

| Component | Description | For Use With | | Environmental Approvals | Catalog Number |
|---|--|----------------------|--|----------------------------|------------------|
| | | Type E Controller | Contactors | | |
|  | Enclosure for Combo KWIKstarter ① CX7/CXU7-9...23 CX7/CXU7-9E...23E | KTA7-25S KTA7-25H | CA7-9...23 CA7-9E...23E CAU7-9...23 CAU7-9E...23E | cUL Type 1/12K IEC IP66 | KS7-C0C4R |

Handle Accessory for CX7/CXU7 KWIKstarters ①

| Accessory | Description | For Use With | Color | Catalog Number |
|---|--|--------------|------------|----------------|
|  | Door Coupling Handle ① • Padlockable • NEMA Type 1/12K and IP66 • Includes handle coupling (shaft) • Requires KT7-KN1 Locking Knob | All KT7s | Gray/Black | T.B.A. |
| | | | Red/Yellow | T.B.A. |
|  | Lockable Twist Knob • for use with KT7-SHB | All KT7s | Gray/Black | T.B.A. |
|  | Universal Connector for CX7/CXU7 • Provides electrical interconnection of KTA7 and CA7 (with AC or Electronic DC coil) • Applies to FVNR and FVR versions • Allows for mounting the CA7 on a single DIN rail | All KT7s | Black | T.B.A. ④ |

CX7 KWIKstarter Pilot Device Kits (for use with KS7-C0C4R Type 1/12K) ①②

| Kits | Description | Contact Blocks included | | Catalog Number | | |
|---|---|-------------------------|--------------|--|------------------|---|
| | | NO | NC | | | |
|  | Multi-Function Pushbutton kit Non-illuminated START-STOP I-O | 1 | 1 | KS7-P3U KS7-P4U | See page C29 for | |
| | FOR-STOP-REV UP-STOP-DOWN OPEN-STOP-CLOSE | 2 | 1 | KS7-P3U-REV KS7-P4U-REV KS7-P5U-REV | | |
|  | Selector switch kits Non-illuminated, includes legend plate | | | | | |
| | ON-OFF 2-Position | 1 | 0 | KS7-P6 | | |
| | HAND-OFF-AUTO 3-Position | 2 | 0 | KS7-P7 | | |
|  | Run Pilot Light or Overload Alarm Pilot Light Plastic operator with diffuser lens in Red, Green or Yellow, with integrated LED power module | | | Replace ⑤ with color choice R = Red G = Green Y = Yellow | | KS7-P1⑤24V ⑥ KS7-P1⑤120V KS7-P1⑤240V |
| | FOR-OFF-REV 3-Position UP-OFF-DOWN 3-Position OPEN-OFF-CLOSE 3-Position | 2 | 0 | KS7-P6-REV KS7-P7-REV KS7-P8-REV | | |
|  | Hole Plug used to plug 22.5mm holes. | | Gray Plastic | D7-N8 | | See page H72 |

① KS7-C0C4R is supplied with the following holes:
• (1) one 22mm hole for a Pilot Device option, select one kit from this page.
• (1) one 22mm hole for KT9-SHB (or SHRY) Disconnect or Reset handle.


② Plastic bezel is standard. Pilot Device Kits include D7-BX_ Base Mounted contact blocks. See Section H for more information.

③ CPT not possible.

④ Standard KT9-32S-PEC23 does not work in CX7/CXU7 Kwikstarters.

⑤ KS7-P1⑤24V can be used with 24VAC or 24VDC.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | | |
|---|-------|-------|-------|------------------------|--------------------------------------|---------------------------|-------------------|----------------|
|  | | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ②③ | Dimension Code |
| | | | | | | | | |
| Three Phase | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ②③ | Dimension Code | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9-10-*AS0.16A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9-10-*AS0.25A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9-10-*AS0.4A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*AS0.63A-A10-WG | W6 | |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*AS1.0A-A10-WG | W6 | |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*AS1.6A-A10-WG | W6 | |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CX7-9-10-*AS2.5A-A10-WG | W6 | |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*AS4.0A-A10-WG | W6 | |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CX7-9-10-*AS6.3A-A10-WG | W6 | |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CX7-12-10-*AS10A-A10-WG | W6 | |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CX7-16-10-*AS16A-A10-WG | W6 | |
| KTA9-40H High Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-*AH0.63A-A10-WG | W6 | |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-*AH1.0A-A10-WG | W6 | |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-*AH1.6A-A10-WG | W6 | |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CX7-9-10-*AH2.5A-A10-WG | W6 | |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-*AH4.0A-A10-WG | W6 | |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CX7-9-10-*AH6.3A-A10-WG | W6 | |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CX7-12-10-*AH10A-A10-WG | W6 | |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CX7-16-10-*AH16A-A10-WG | W6 | |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CX7-23-10-*AH20A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-23-10-*AH25A-A10-WG | W6 | |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CX7-30-10-*AH29A-A10-WG | W6 | |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CX7-37-10-*AH32A-A10-WG | W6 | |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CX7-37-10-*AH36A-A10-WG | W6 | |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CX7-43-10-*AH40A-A10-WG | W6 | |
| KTA7-45H High Interrupting Capacity | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CX7-30-10-*AH10A-A10-WG | W7 | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CX7-30-10-*AH16A-A10-WG | W7 | |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CX7-30-10-*AH20A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CX7-30-10-*AH25A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CX7-30-10-*AH32A-A10-WG | W7 | |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CX7-37-10-*AH45A-A10-WG | W7 | |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CX7-43-10-*AH45A-A10-WG | W7 | |

Includes:

- Type 4 / 12 enclosure - watertight, dusttight
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ③
- Pilot device shown is factory installed option

See page F1.77 for factory installed modifications

Contactor AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change CX7-9-10-*0.16A-A10-WG to CBX7-9-10-*0.16A-A10-WJ.

- ③ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9-10-*0.16A-A10-WG to CX7-9-10-*0.16A-A10-WJ.
- ④ Other voltages available, see Section A in this catalog.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑥ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosur3 | | Dimension Code |
|--|-------|-------|-------|------------------------|--------------------------------------|-----------------------------------|----------------|
| Max. Horsepower ①② | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ③ | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9E-10-*-AS0.16A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9E-10-*-AS0.25A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9E-10-*-AS0.4A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9E-10-*-AS0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9E-10-*-AS1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9E-10-*-AS1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CX7-9E-10-*-AS2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9E-10-*-AS4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CX7-9E-10-*-AS6.3A-A10-WG | W6 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CX7-12E-10-*-AS10A-A10-WG | W6 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CX7-16E-10-*-AS16A-A10-WG | W6 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9E-10-*-AH0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9E-10-*-AH1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9E-10-*-AH1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CX7-9E-10-*-AH2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9E-10-*-AH4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CX7-9E-10-*-AH6.3A-A10-WG | W6 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CX7-12E-10-*-AH10A-A10-WG | W6 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CX7-16E-10-*-AH16A-A10-WG | W6 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CX7-23E-10-*-AH20A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-23E-10-*-AH25A-A10-WG | W6 |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CX7-30E-10-*-AH29A-A10-WG | W6 |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CX7-37E-10-*-AH32A-A10-WG | W6 |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CX7-37E-10-*-AH36A-A10-WG | W6 |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CX7-43E-10-*-AH40A-A10-WG | W6 |
| KTA7-45H High Interrupting Capacity | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CX7-30E-10-*-AH10A-A10-WG | W7 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CX7-30E-10-*-AH16A-A10-WG | W7 |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CX7-30E-10-*-AH20A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CX7-30E-10-*-AH25A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CX7-37E-10-*-AH32A-A10-WG | W7 |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CX7-37E-10-*-AH45A-A10-WG | W7 |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CX7-43E-10-*-AH45A-A10-WG | W7 |



Includes:

- Type 4 / 12 enclosure - watertight, dusttight
- KT9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ④
- Pilot device shown is factory installed option

See page F1.77 for factory installed modifications

Contactor Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

- ① Horsepower ratings shown in the table above are for reference. *The final selection of the controller depends on the actual motor full load current and service factor.*
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② CX7 may be applied to single phase loads. Contact factory for these specifications.
- ③ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9E-10-*-0.16A-A10-**WG** to CX7-9E-10-*-0.16A-A10-**WJ**.
- ④ CX7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Ordering Instructions

| | |
|----------------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code tables on this page for codes |
| Select modifications if required | |

Enclosed Motor Circuit Controllers

Enclosed Reversing Combination Controller, AC Operation - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | Dimension Code |
|--|-------|-------|-------|------------------------|--------------------------------------|---------------------------|----------------|
| Max. Horsepower ①② | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ③④ | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXU7-9-10-*AS0.16A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXU7-9-10-*AS0.25A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXU7-9-10-*AS0.40A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9-10-*AS0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9-10-*AS1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9-10-*AS1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXU7-9-10-*AS2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9-10-*AS4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXU7-9-10-*AS6.3A-A10-WG | W6 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXU7-12-10-*AS10A-A10-WG | W6 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXU7-16-10-*AS16A-A10-WG | W6 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9-10-*AH0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9-10-*AH1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9-10-*AH1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXU7-9-10-*AH2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9-10-*AH4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXU7-9-10-*AH6.3A-A10-WG | W6 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXU7-12-10-*AH10A-A10-WG | W6 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXU7-16-10-*AH16A-A10-WG | W6 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXU7-23-10-*AH20A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXU7-23-10-*AH25A-A10-WG | W6 |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CXU7-30-10-*AH29A-A10-WG | W6 |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CXU7-37-10-*AH32A-A10-WG | W6 |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CXU7-37-10-*AH36A-A10-WG | W6 |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CXU7-43-10-*AH40A-A10-WG | W6 |
| KTA9-45H High Interrupting Capacity | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXU7-30-22-*AH10A-A10-WG | W7 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXU7-30-22-*AH16A-A10-WG | W7 |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CXU7-30-22-*AH20A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXU7-30-22-*AH25A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CXU7-37-22-*AH32A-A10-WG | W7 |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXU7-37-22-*AH45A-A10-WG | W7 |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXU7-43-22-*AH45A-A10-WG | W7 |



Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactors (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ③
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F1.77 for factory installed modifications

Contactor AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② CXU7 may be applied to single phase loads. Contact factory for these applications.

③ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9-10-*0.16A-A10-WG to CXU7-9-10-*0.16A-A10-WJ.

④ Other voltages available, see Section A in this catalog.

⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

⑥ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | Dimension Code |
|--|-------|-------|-------|------------------------|--------------------------------------|-----------------------------|----------------|
| Max. Horsepower ①② | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ③ | |
| Three Phase | | | | | | | |
| 200V | 230V | 460V | 575V | | | | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXU7-9E-10-*-AS0.16A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXU7-9E-10-*-AS0.25A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXU7-9E-10-*-AS0.40A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9E-10-*-AS0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9E-10-*-AS1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9E-10-*-AS1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXU7-9E-10-*-AS2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9E-10-*-AS4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXU7-9E-10-*-AS6.3A-A10-WG | W6 |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXU7-12E-10-*-AS10A-A10-WG | W6 |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXU7-16E-10-*-AS16A-A10-WG | W6 |
| KTA9-40H High Interrupting Capacity | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXU7-9E-10-*-AH0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXU7-9E-10-*-AH1.0A-A10-WG | W6 |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXU7-9E-10-*-AH1.6A-A10-WG | W6 |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXU7-9E-10-*-AH2.5A-A10-WG | W6 |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXU7-9E-10-*-AH4.0A-A10-WG | W6 |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXU7-9E-10-*-AH6.3A-A10-WG | W6 |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXU7-12E-10-*-AH10A-A10-WG | W6 |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXU7-16E-10-*-AH16A-A10-WG | W6 |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXU7-23E-10-*-AH20A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXU7-23E-10-*-AH25A-A10-WG | W6 |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CXU7-30E-10-*-AH29A-A10-WG | W6 |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CXU7-37E-10-*-AH32A-A10-WG | W6 |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CXU7-37E-10-*-AH36A-A10-WG | W6 |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CXU7-43E-10-*-AH40A-A10-WG | W6 |
| KTA7-45H High Interrupting Capacity | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXU7-30E-22-*-AH10A-A10-WG | W7 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXU7-30E-22-*-AH16A-A10-WG | W7 |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CXU7-30E-22-*-AH20A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXU7-30E-22-*-AH25A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CXU7-37E-22-*-AH32A-A10-WG | W7 |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXU7-37E-22-*-AH45A-A10-WG | W7 |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXU7-43E-22-*-AH45A-A10-WG | W7 |



Includes:

- Type 4 / 12 enclosure - watertight, dusttight
- KTA9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactors (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ④
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F1.77 for factory installed modifications

Contactors Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

Ordering Instructions

| | |
|---|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code Select modifications if required | See Coil Code tables on this page for codes |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② CXU7 may be applied to single phase loads. Contact factory for these applications.

③ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9E-10-*-0.16A-A10-WG to CXU7-9E-10-*-0.16A-A10-WJ.

④ CXU7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Non-Reversing and Reversing CX7 Combination Controller Modifications (Factory Assembled)

| Description | Add Suffix to Catalog Number |
|---|---|
| Pilot Devices ① | |
| START-STOP multi-function pushbutton | 3U |
| ON-OFF multi-function pushbutton | 4U |
| FOR-STOP-REV multi-function pushbutton | 3U |
| UP-STOP-DOWN multi-function pushbutton | 4U |
| OPEN-STOP-CLOSE multi-function pushbutton | 5U |
| HAND-AUTO selector switch | 5 |
| OFF-ON selector switch | 6 |
| HAND-OFF-AUTO selector switch | 7 |
| FOR-OFF-REV selector switch | 6 |
| UP-OFF-DOWN selector switch | 7 |
| OPEN-OFF-CLOSE selector switch | 8 |
| Pilot light only ③ | 1 |
| Pilot lights only (2) ③ | 2 |
| Pilot light w/ START-STOP multi-function pushbutton ③ | 13U |
| Pilot light w/ ON-OFF multi-function pushbutton ③ | 14U |
| Pilot light w/ HAND-AUTO selector switch ③ | 15 |
| Pilot light w/ OFF-ON selector switch ③ | 16 |
| Pilot light w/ HAND-OFF-AUTO selector switch ③ | 17 |
| Control Power Transformer | |
| (with fused primary and secondary) | Replace (*) in catalog # with the following codes ② |
| <i>Primary volts</i> <i>Secondary volts</i> | |
| 208 120 | XA |
| 240 120 | XB |
| 50 watt 480 120 | XC |
| Standard 575 120 | XD |
| Capacity 380 110 | XG |
| 240 24 | XE |
| 480 24 | XF |
| 600 24 | XJ |
| KT9 Auxiliaries & Trip Contacts ⑤ | |
| Front mount 250V maximum | |
| 1 NO + 1 NC Auxiliary | -C |
| 2 NO Auxiliaries | -D |
| 1 NO SC+OL + 1 NC Auxiliary | -R |
| 1 NO SC+OL + 1 NO Auxiliary | -S |
| Side Mount 600V maximum | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| 1 NC SC+OL + 1 NO Auxiliary | -R10 |
| 1 NC SC+OL + 1 NC Auxiliary | -R11 |

| Description | Add Suffix to Catalog Number |
|---|---|
| Additional KT9 Trip Contacts - Side Mount (600V max) | |
| 1 NO SC+OL + 1 NO SC | -R00 |
| 1 NO SC+OL + 1 NC SC | -R01 |
| 1 NC SC+OL + 1 NO SC | -R10 |
| KT9 Accessories | |
| Undervoltage Release Module | Select coil voltage from table below -UA-* |
| Shunt Release Module | -AA-* |
| CA7 Auxiliary Contacts ⑥ | |
| 1 NO Auxiliary | -S10 |
| 1 NC Auxiliary | -S01 |
| 1 NO + 1 NC Auxiliary | -S11 |
| 2 NO Auxiliaries | -S20 |
| 2 NC Auxiliaries | -S02 |
| 1 NO + 2 NC Auxiliary | -S12 |
| 2 NO + 1 NC Auxiliary | -S21 |
| 3 NO Auxiliaries | -S30 |
| 3 NC Auxiliaries | -S03 |
| 1 NO + 3 NC Auxiliary | -S13 |
| 3 NO + 1 NC Auxiliary | -S31 |
| 2 NO + 2 NC Auxiliary | -S22 |
| 4 NO Auxiliaries | -S40 |
| 4 NC Auxiliaries | -S04 |
| Alternate Aux. Contact Arrangement (CA7 only) | |
| 1 NC in lieu of standard 1 NO | -SX10 |
| 2 NC in lieu of standard 2 NO (on CXU7 only) | -SX2 |
| CA7 Contactor Accessories | |
| Electronic Interface | -JE ④ |
| Surge Suppressor RC | -RC |
| Surge Suppressor Varistor | -V |
| Unwired Terminal Blocks Specify quantity (▼) | -▼TB |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

- ① Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").
- ② Factory modifications often change the enclosure size. Refer to factory for dimensions when critical to the installation.

- ③ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 277 VAC...575VAC require a control circuit transformer.
- ④ CR17E-24 will be used. CR17E-12 by special order only.
- ⑤ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 Explosion Proof Combination Controllers - NEMA Type 4/4X/7/9 with Type 4 Gaskets

| Amp / Horsepower Rating | | | | O/L Relay Ampere Range | | Magnetic Response Current | Catalog Number ⑥ | Dimension Code |
|---|-------|-------|-------|------------------------|-----|---------------------------|------------------|----------------|
| Max. Horsepower ①②③ | | | | Three Phase | | Magnetic Response Current | Catalog Number ⑥ | Dimension Code |
| 200V | 230V | 460V | 575V | | | | | |
| KT A9-32S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CX7-9-10-* | AS0.16A-A10-EZ | EZ |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CX7-9-10-* | AS0.25A-A10-EZ | EZ |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CX7-9-10-* | AS0.4A-A10-EZ | EZ |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-* | AS0.63A-A10-EZ | EZ |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-* | AS1A-A10-EZ | EZ |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-* | AS1.6A-A10-EZ | EZ |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CX7-9-10-* | AS2.5A-A10-EZ | EZ |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-* | AS4A-A10-EZ | EZ |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CX7-9-10-* | AS6.3A-A10-EZ | EZ |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CX7-12-10-* | AS10A-A10-EZ | EZ |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CX7-16-10-* | AS16A-A10-EZ | EZ |
| KT A9-40H High Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CX7-9-10-* | AH0.63A-A10-EZ | EZ |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CX7-9-10-* | AH1.0A-A10-EZ | EZ |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CX7-9-10-* | AH1.6A-A10-EZ | EZ |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CX7-9-10-* | AH2.5A-A10-EZ | EZ |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CX7-9-10-* | AH4A-A10-EZ | EZ |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CX7-9-10-* | AH6.3A-A10-EZ | EZ |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CX7-12-10-* | AH10A-A10-EZ | EZ |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CX7-16-10-* | AH16A-A10-EZ | EZ |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CX7-23-10-* | AH20A-A10-EZ | EZ |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-23-10-* | AH25A-A10-EZ | EZ |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CX7-23-10-* | AH29A-A10-EZ | EZ |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CX7-23-10-* | AH32A-A10-EZ | EZ |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CX7-23-10-* | AH36A-A10-EZ | EZ |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CX7-23-10-* | AH40A-A10-EZ | EZ |
| KT A7-45H High Interrupting Capacity | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CX7-30-10-* | AH10A-A10-EZ | EZ |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CX7-30-10-* | AH16A-A10-EZ | EZ |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CX7-30-10-* | AH20A-A10-EZ | EZ |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CX7-30-10-* | AH25A-A10-EZ | EZ |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CX7-30-10-* | AH32A-A10-EZ | EZ |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CX7-37-10-* | AH45A-A10-EZ | EZ |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CX7-43-10-* | AH45A-A10-EZ | EZ |



Includes:

- Class I, Div I, Group B, C & D – Class II, Div I, Group E, F & G enclosure Class III, Zone I, IIB & H2
- KT9 “Type E” Self-protected Combination Manual Motor Controller with 1 NO front mount auxiliary contact (Cat.# KT9-PE1-10)
- Terminal Adaptor for Combo Type E/F Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring

Modifications (Factory Assembled)

| KT9 Auxiliaries & Trip Contacts | | |
|----------------------------------|--|----------------------------------|
| Front Mount 250V max. | | |
| 1 NC Auxiliary | | -A |
| 1 NO + 1 NC Auxiliary | | -C |
| 2 NO Auxiliaries | | -D |
| 1 NO SC+OL + 1 NC Auxiliary | | -R |
| 1 NO SC+OL + 1 NO Auxiliary | | -S |
| Side Mount 600V max. | | |
| 2 NO Auxiliaries | | -AS20 |
| 1 NO + 1 NC Auxiliary | | -AS11 |
| 1 NC SC+OL + 1 NO Auxiliary | | -R10 |
| 1 NC SC+OL + 1 NC Auxiliary | | -R11 |
| CA7 Contactor Accessories | | Add Suffix to Cat. Number |
| 1 NC Auxiliary | | -S01 |
| 1 NO Auxiliary | | -S10 |
| Electronic Interface | | -JE |
| Surge Suppressor RC | | -RC |
| Surge Suppressor Varistor | | -V |
| Enclosure Modifications | | |
| Dual START/STOP pushbutton | | 3 |
| ON/OFF selector switch | | 6 |
| H-O-A | | 7 |
| Breather/Drain | | -BD |

Contactor AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.
- ② Magnetic trip is fixed at 14x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change “CX7” in catalog number to “CBX7”. Three pole series connection will be provided. Ex: Change CX7-9-10-*-0.16A-A10-EZ to CBX7-9-10-*-0.16A-A10-EZ.
- ④ Other voltages available, see Section A in this catalog.

Ordering Instructions

| | |
|----------------------------------|-----------------------------------|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See tables on this page for codes |
| Select modifications if required | |

- ⑤ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Type E/F Simplex & Duplex Pump Controllers



Simplex Pump Controllers

A single KTA7 motor controller plus matching CA7 contactor can be combined in an enclosure as a Simplex Combination Controller for pumping applications. Additional space is provided for the customer to field addition of time clocks or float switches as required by the application. An environmentally approved thru-the-door handle provides for a required disconnect. These pump panels can be supplied with Suitable for Service Entrance (SUSE) label on demand. Type E/F pump panels are less expensive than the classic Construction Type A (Fusible) or Construction Type C (MCCB) versions shown in Section C of this catalog.

Type E/F Simplex Pump Controller Panels include:

- Contactor (with AC coil)
- Type E Self-protected motor controller
- “START” Momentary Push Button
- “HOA” Selector Switch
- A minimum of 6” x 10” extra back pan space
- UL Type rated enclosure

Duplex Pump Controllers

Two starter duplex panels can be fed from one power source or two power sources and include lead/lag control circuitry to meet customers’ need in pumping and many other applications. Two environmentally approved thru-the-door handle disconnect mechanisms means no main feeder device is required and smaller and less expensive panel than a classic duplex panel as offered in Section C of this catalog. The following pages include a selection of duplex controllers and you can contact your Sprecher + Schuh representative to modify the selection.

Type E/F Duplex Pump Controller Panels include:

- (2) Contactors (AC coil) and (2) Type E/F self protected motor controllers
- (1) Electronic alternating relay
- (1) UL type rated enclosure
- Designed per alternation control diagram shown at bottom of page F1.85



F
Enclosed Motor Circuit Controllers

Series CXP7 & Type E/F Combo Pump Panel

| Max. Horsepower ①②③ Three Phase | | | | Current Adjustment Range (A) | Magnetic Response Current | Type 3R Rainproof (Metal) | Dimension Code | Type 4X Watertight Corrosion Resistant Non-metallic | Dimension Code |
|--|-------|-------|-------|------------------------------|---------------------------|------------------------------|----------------|---|----------------|
| 200V | 230V | 460V | 575V | | | Catalog Number ④⑤ | | Catalog Number ④⑥ | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXP7-9-10-*-AS0.16A-A10-RG | 0 | CXP7-9-10-*-AS0.16A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXP7-9-10-*-AS0.25A-A10-RG | 0 | CXP7-9-10-*-AS0.25A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXP7-9-10-*-AS0.40A-A10-RG | 0 | CXP7-9-10-*-AS0.40A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXP7-9-10-*-AS0.63A-A10-RG | 0 | CXP7-9-10-*-AS0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXP7-9-10-*-AS1.0A-A10-RG | 0 | CXP7-9-10-*-AS1.0A-A10-CG | R/F |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXP7-9-10-*-AS1.6A-A10-RG | 0 | CXP7-9-10-*-AS1.6A-A10-CG | R/F |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXP7-9-10-*-AS2.5A-A10-RG | 0 | CXP7-9-10-*-AS2.5A-A10-CG | R/F |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXP7-9-10-*-AS4.0A-A10-RG | 0 | CXP7-9-10-*-AS4.0A-A10-CG | R/F |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXP7-9-10-*-AS6.3A-A10-RG | 0 | CXP7-9-10-*-AS6.3A-A10-CG | R/F |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXP7-12-10-*-AS10A-A10-RG | 0 | CXP7-12-10-*-AS10A-A10-CG | R/F |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXP7-16-10-*-AS16A-A10-RG | 0 | CXP7-16-10-*-AS16A-A10-CG | R/F |
| KTA9-40H High Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXP7-9-10-*-AH0.63A-A10-RG | 0 | CXP7-9-10-*-AH0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXP7-9-10-*-AH1.0A-A10-RG | 0 | CXP7-9-10-*-AH1.0A-A10-CG | R/F |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXP7-9-10-*-AH1.6A-A10-RG | 0 | CXP7-9-10-*-AH1.6A-A10-CG | R/F |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXP7-9-10-*-AH2.5A-A10-RG | 0 | CXP7-9-10-*-AH2.5A-A10-CG | R/F |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXP7-9-10-*-AH4.0A-A10-RG | 0 | CXP7-9-10-*-AH4.0A-A10-CG | R/F |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXP7-9-10-*-AH6.3A-A10-RG | 0 | CXP7-9-10-*-AH6.3A-A10-CG | R/F |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXP7-12-10-*-AH10A-A10-RG | 0 | CXP7-12-10-*-AH10A-A10-CG | R/F |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXP7-16-10-*-AH16A-A10-RG | 0 | CXP7-16-10-*-AH16A-A10-CG | R/F |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXP7-23-10-*-AH20A-A10-RG | 0 | CXP7-23-10-*-AH20A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXP7-23-10-*-AH25A-A10-RG | 0 | CXP7-23-10-*-AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CXP7-30-10-*-AH29A-A10-RG | 0 | CXP7-30-10-*-AH29A-A10-CG | R/F |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CXP7-37-10-*-AH32A-A10-RG | 0 | CXP7-37-10-*-AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CXP7-37-10-*-AH36A-A10-RG | 0 | CXP7-37-10-*-AH36A-A10-CG | R/F |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CXP7-43-10-*-AH40A-A10-RG | 0 | CXP7-43-10-*-AH40A-A10-CG | R/F |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXP7-30-10-*-AH10A-A10-RG | Q | CXP7-30-10-*-AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXP7-30-10-*-AH16A-A10-RG | Q | CXP7-30-10-*-AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CXP7-30-10-*-AH20A-A10-RG | Q | CXP7-30-10-*-AH20A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXP7-30-10-*-AH25A-A10-RG | Q | CXP7-30-10-*-AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CXP7-30-10-*-AH32A-A10-RG | Q | CXP7-30-10-*-AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXP7-37-10-*-AH45A-A10-RG | Q | CXP7-37-10-*-AH45A-A10-CG | R/F |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXP7-43-10-*-AH45A-A10-RG | Q | CXP7-43-10-*-AH45A-A10-CG | R/F |

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

Contactors AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ⑥ | 440V | 480V |
| 0600 ⑥ | 550V | 600V |

Ordering Instructions

| | |
|---|----------------------------------|
| Specify Catalog Number | |
| Replace (*) with Coil Code Factory Modifications available | See this page Contact factory |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

• For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

③ CXP7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CXP7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change CXP7-9-10-*-0.16A-A10-RG to CBXP7-9-10-*-0.16A-A10-RG.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "RG" suffix to "RJ". Ex: Change CXP7-9-10-*-0.16A-A10-RG to CXP7-9-10-*-0.16A-A10-RJ.

⑤ Other voltages available, see Section A in this catalog.

⑥ Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Series CXDP7 with Type E/F Combination Controller

| Max. Horsepower Three Phase | | | | Current Adjustment Range (A) | Magnetic Response Current | Type 3R Rainproof (Metal) | Dimension Code | Type 4X Watertight Corrosion Resistant Non-metallic | Dimension Code |
|--|-------|-------|-------|------------------------------------|---------------------------------|--------------------------------------|-------------------|---|-------------------|
| 200V | 230V | 460V | 575V | | | Catalog Number ② | | Catalog Number ② | |
| KTA9-32S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.2 | CXDP7-9-10- * -AS0.16A-A10-RG | R/F | CXDP7-9-10- * -AS0.16A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.5 | CXDP7-9-10- * -AS0.25A-A10-RG | R/F | CXDP7-9-10- * -AS0.25A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.6 | CXDP7-9-10- * -AS0.4A-A10-RG | R/F | CXDP7-9-10- * -AS0.4A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXDP7-9-10- * -AS0.63A-A10-RG | R/F | CXDP7-9-10- * -AS0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXDP7-9-10- * -AS1A-A10-RG | R/F | CXDP7-9-10- * -AS1A-A10-CG | R/F |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXDP7-9-10- * -AS1.6A-A10-RG | R/F | CXDP7-9-10- * -AS1.6A-A10-CG | R/F |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 35 | CXDP7-9-10- * -AS2.5A-A10-RG | R/F | CXDP7-9-10- * -AS2.5A-A10-CG | R/F |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXDP7-9-10- * -AS4A-A10-RG | R/F | CXDP7-9-10- * -AS4A-A10-CG | R/F |
| 1 | 1-1/2 | 3 | ~ | 4.0...6.3 | 88 | CXDP7-9-10- * -AS6.3A-A10-RG | R/F | CXDP7-9-10- * -AS6.3A-A10-CG | R/F |
| 2 | 2 | 5 | ~ | 6.3...10 | 140 | CXDP7-12-10- * -AS10A-A10-RG | R/F | CXDP7-12-10- * -AS10A-A10-CG | R/F |
| 3 | 5 | 10 | ~ | 10...16 | 224 | CXDP7-16-10- * -AS16A-A10-RG | R/F | CXDP7-16-10- * -AS16A-A10-CG | R/F |
| KTA9-40H High Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.8 | CXDP7-9-10- * -AH0.63A-A10-RG | R/F | CXDP7-9-10- * -AH0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 1/2 | 0.63...1.0 | 14 | CXDP7-9-10- * -AH1.0A-A10-RG | R/F | CXDP7-9-10- * -AH1.0A-A10-CG | R/F |
| ~ | ~ | 3/4 | ~ | 1.0...1.6 | 22 | CXDP7-9-10- * -AH1.6A-A10-RG | R/F | CXDP7-9-10- * -AH1.6A-A10-CG | R/F |
| 1/2 | 1/2 | 1 | 1-1/2 | 1.6...2.5 | 33 | CXDP7-9-10- * -AH2.5A-A10-RG | R/F | CXDP7-9-10- * -AH2.5A-A10-CG | R/F |
| 3/4 | 3/4 | 2 | 3 | 2.5...4.0 | 52 | CXDP7-9-10- * -AH4.0A-A10-RG | R/F | CXDP7-9-10- * -AH4.0A-A10-CG | R/F |
| 1 | 1-1/2 | 3 | 5 | 4.0...6.3 | 82 | CXDP7-9-10- * -AH6.3A-A10-RG | R/F | CXDP7-9-10- * -AH6.3A-A10-CG | R/F |
| 2 | 2 | 5 | 7-1/2 | 6.3...10 | 130 | CXDP7-12-10- * -AH10A-A10-RG | R/F | CXDP7-12-10- * -AH10A-A10-CG | R/F |
| 3 | 5 | 10 | 10 | 10...16 | 208 | CXDP7-16-10- * -AH16A-A10-RG | R/F | CXDP7-16-10- * -AH16A-A10-CG | R/F |
| 5 | 5 | 10 | ~ | 14.5...20 | 260 | CXDP7-23-10- * -AH20A-A10-RG | R/F | CXDP7-23-10- * -AH20A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXDP7-23-10- * -AH25A-A10-RG | R/F | CXDP7-23-10- * -AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | ~ | 24...29 | 406 | CXDP7-30-10- * -AH29A-A10-RG | R/F | CXDP7-30-10- * -AH29A-A10-CG | R/F |
| 7-1/2 | 10 | 25 | ~ | 27...32 | 448 | CXDP7-37-10- * -AH32A-A10-RG | R/F | CXDP7-37-10- * -AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 30...36 | 432 | CXDP7-37-10- * -AH36A-A10-RG | R/F | CXDP7-37-10- * -AH36A-A10-CG | R/F |
| 10 | 10 | 30 | ~ | 34...40 | 480 | CXDP7-43-10- * -AH40A-A10-RG | R/F | CXDP7-43-10- * -AH40A-A10-CG | R/F |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXDP7-30-10- * -AH10A-A10-RG | R/F | CXDP7-30-10- * -AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXDP7-30-10- * -AH16A-A10-RG | R/F | CXDP7-30-10- * -AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CXDP7-30-10- * -AH20A-A10-RG | R/F | CXDP7-30-10- * -AH20A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXDP7-30-10- * -AH25A-A10-RG | R/F | CXDP7-30-10- * -AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CXDP7-30-10- * -AH32A-A10-RG | R/F | CXDP7-30-10- * -AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXDP7-37-10- * -AH45A-A10-RG | R/F | CXDP7-37-10- * -AH45A-A10-CG | R/F |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXDP7-43-10- * -AH45A-A10-RG | R/F | CXDP7-43-10- * -AH45A-A10-CG | R/F |

F
Enclosed Motor Circuit Controllers

**Contactor
AC Coil Codes (*) ①**

| AC Coil Code | Voltage Range | |
|-----------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 024Z | 24V | 24V |
| 0120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 0415 | 400-415V | ~ |
| 0480 ② | 440V | 480V |
| 0600 ② | 550V | 600V |

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.



Ordering Instructions

| | |
|---|----------------------------------|
| Specify Catalog Number | |
| Replace (*) with Coil Code Factory Modifications available | See this page Contact factory |

- ① Other voltages available, see Section A in this catalog.
- ② Catalog number (-A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Custom Multi-Starter Control Panels

From 10 to 100 or more, consult the experts

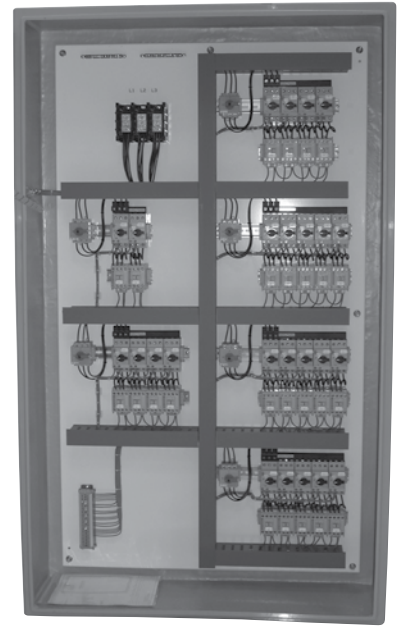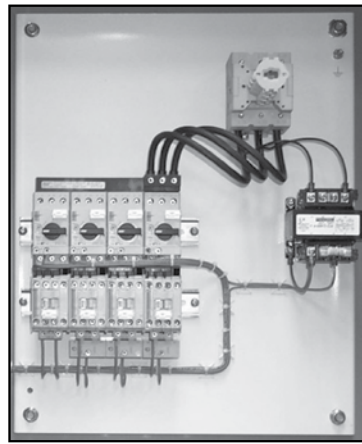

Your Motor Control + Protection Consultant

Sprecher + Schuh's slogan is "Motor control + protection consultant". This means part of our job is to be knowledgeable about these issues and to help customers choose components that not only comply with UL, NEC and CSA standards but also maximizes the SCCR rating of the assembled multi-starter panel, leading to increased protection of equipment and personnel.


Multiple KTA9, KTB9 or KTC9 motor controllers plus matching CA7 contactors can be combined in a single assembly as a multi-motor starter custom control panel. Three, 33, 133 or more motor controllers and KTU9 molded case circuit breakers, as well as other power components and control circuits, can be designed and


assembled into a custom multi-motor starter by Sprecher + Schuh to meet customers' unique application requirements. These pages include a few pictures of custom multi-starter control panels built by Sprecher + Schuh. Contact your Sprecher + Schuh motor control and protection representative for consultation regarding design, quotations, or help explaining the complex UL, NEC and CSA codes that apply to a custom assembly.

F
Enclosed Motor Circuit Controllers

For your
Custom application

contact
customquotes@sprecherschuh.com

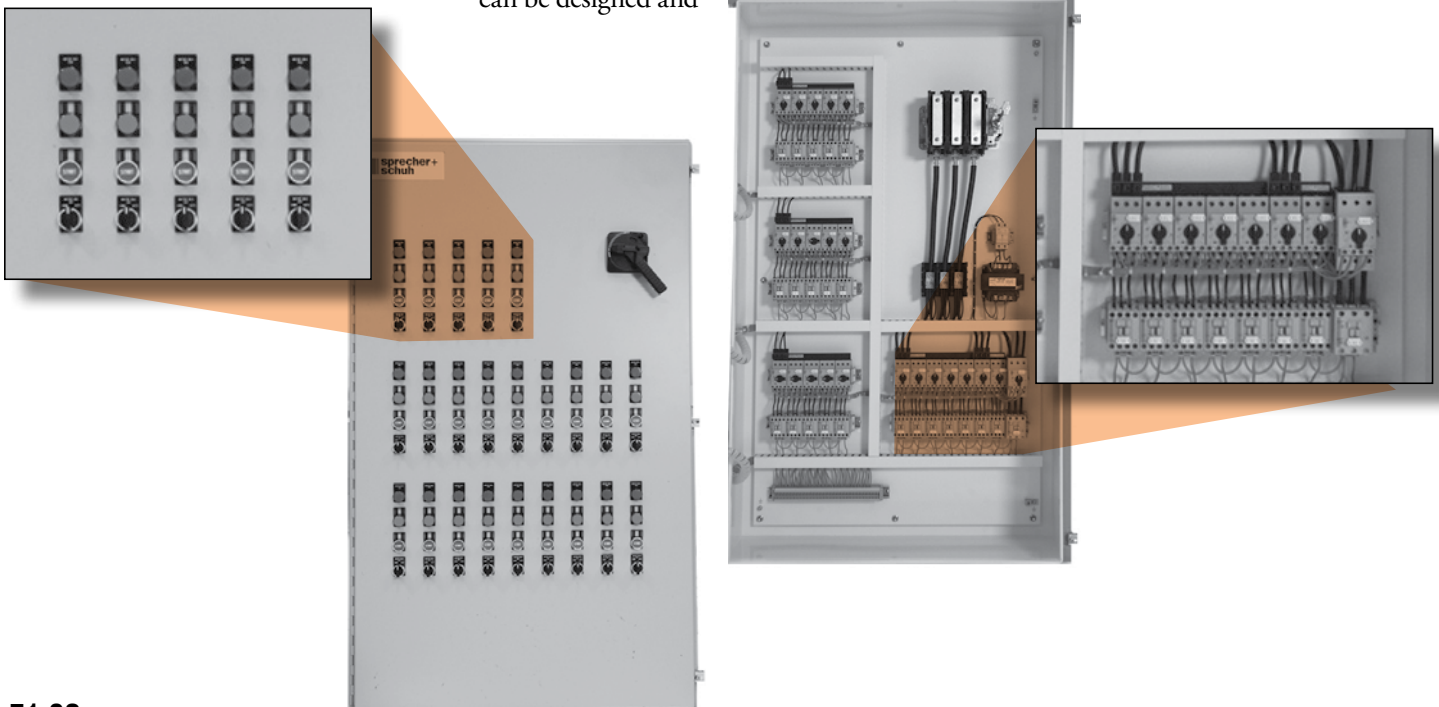

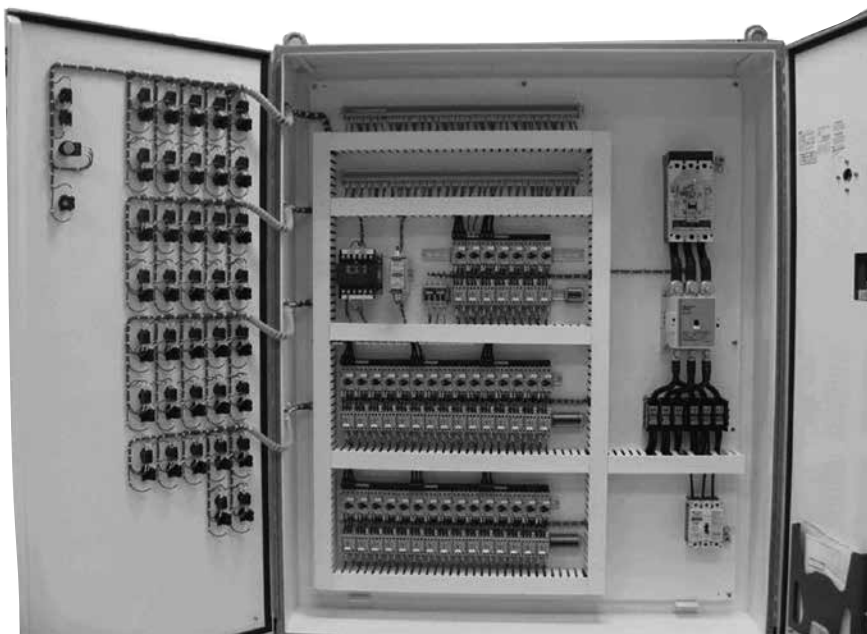


Short Circuit Current Ratings (SSCR)


Short Circuit Current Ratings as defined by UL is a hot topic of discussion within the controls marketplace.

UL 508A Industrial Control Panel specifications require every multiple motor starter panel assembly to be labeled with the Short-Circuit Current Rating (SCCR), which depends on the weakest component's KAIC rating. The SCCR rules are complicated and UL conducts classes around the country on this subject. Sprecher + Schuh conducted a survey of multi-starter panel builders which indicated an increased concern on

the part of panel builders to comply with the UL regulations; yet many do not truly understand the complexity of the rules. This is another reason to consult the experts at Sprecher + Schuh.

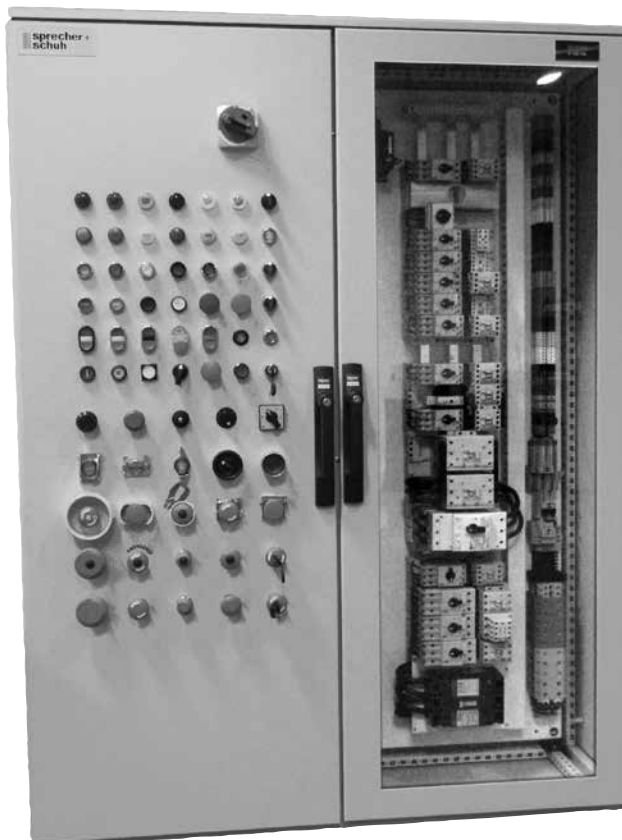

3-Phase 60mm Bus Bar System vertically arranged to maximize space

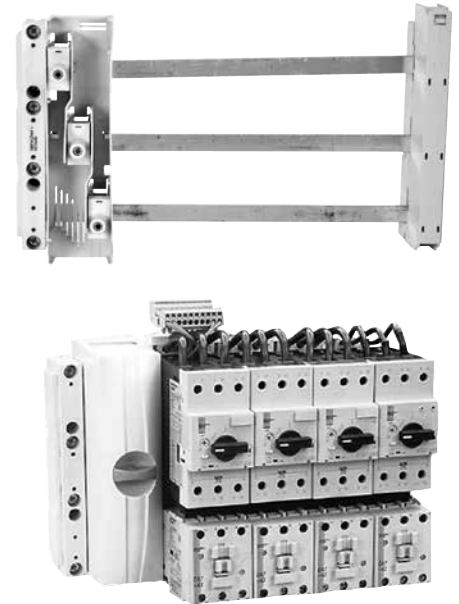

Custom Bus Bar Systems

Sprecher + Schuh has teamed-up with *Wöhner* to supply 3-phase 60 mm bus bar systems. Bus Bar systems offer more flexibility, and a smaller, more economical alternative to a Motor Control Center that uses 'bucket' design.


- Sprecher + Schuh can supply 3-phase 60 mm bus bar components for customer assembly into a control panel.
- We can help design a 3-phase 60 mm bus bar system and provide it with or without components and ship to the customer as open assembly.
- Sprecher + Schuh can help design a 3-phase 60 mm bus bar system and integrate that bus system into an enclosed assembly or multi-starter custom control panel to meet customers' unique specifications.

Please contact your local Sprecher + Schuh Representative or our Technical Support Team to help design our components to meet your needs, which can include building the custom control.



F

Enclosed Motor Circuit Controllers

Single, Two and Three Phase Connection Diagram

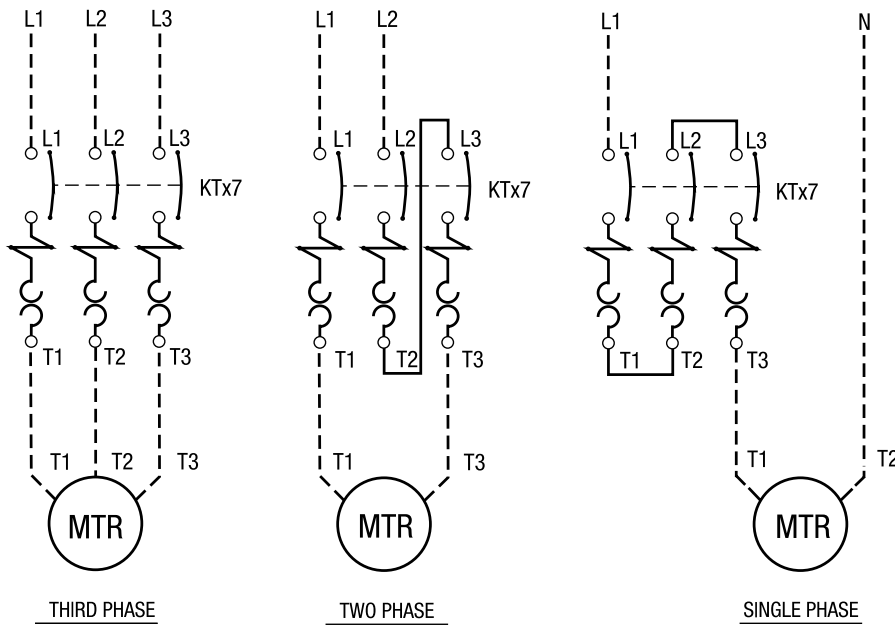

**Type E/F Combination Controller Full Voltage Non-Reversing
AC Control with D7 Series Pilot Devices**

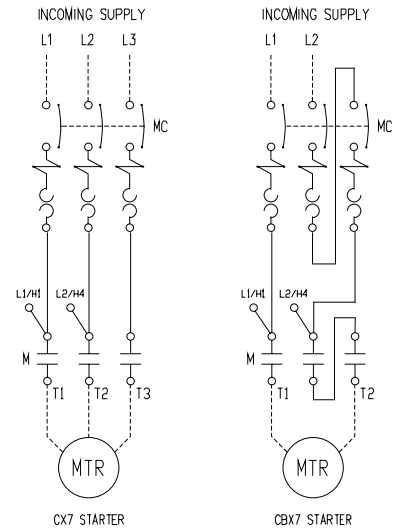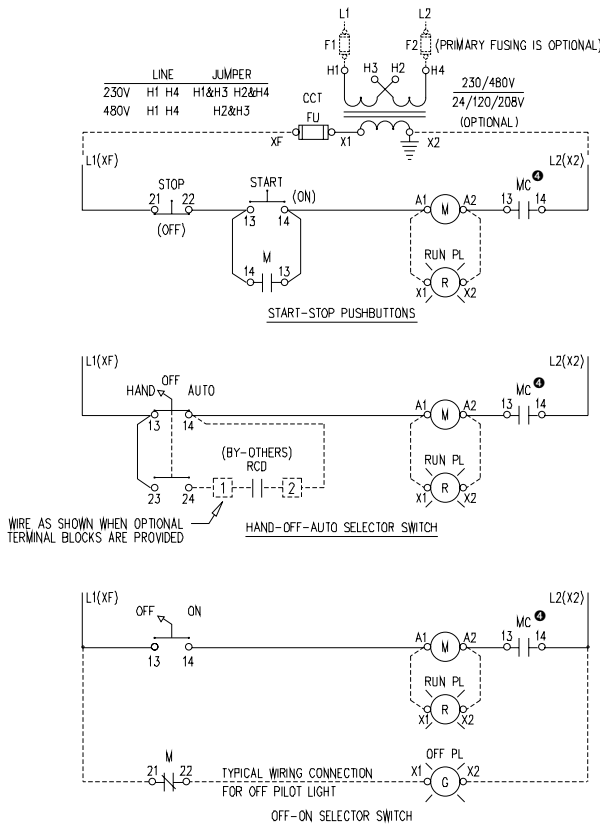


- NOTES:
- 1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER
 - 2) MC: KT9 'TYPE E' MOTOR CONTROLLER
 - 3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED
 - 4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS


F

Enclosed Motor Circuit Controllers

KTA9 Type E/F Combination 3-PH FVNR Duplex Alternating Panel with H-O-A, Lead, Lag and Stop 1-Pole Float Switches

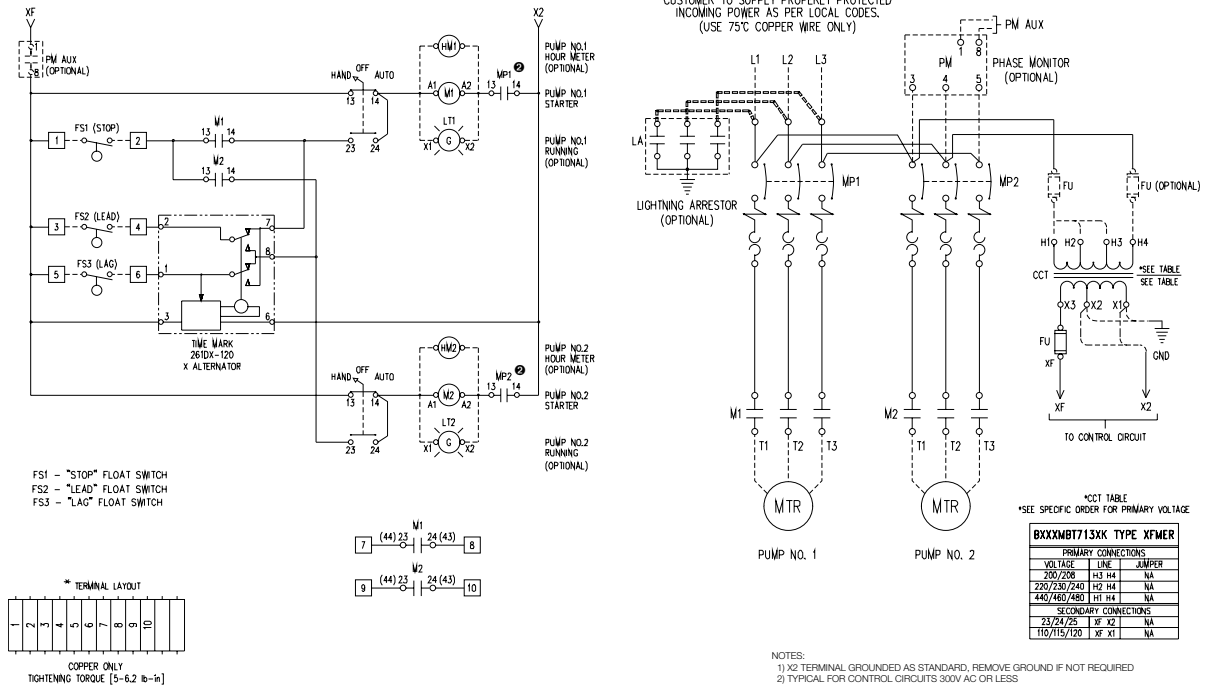


KTA9 Type E/F Combination 3-PH FVNR Duplex Alternating Panel with H-O-A, Alarm Circuit, Lead, Lag, Stop, 1-Pole Float Switches

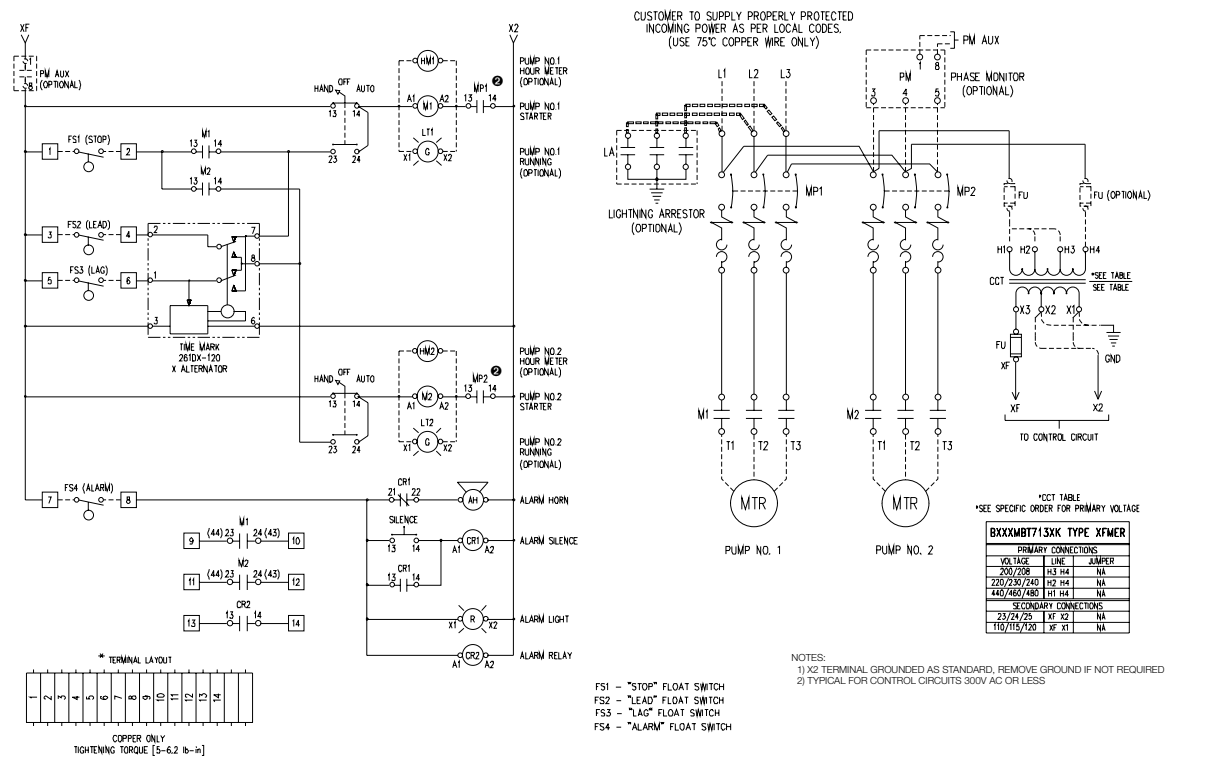

F Enclosed Motor Circuit Controllers

CX7/CXU7 KWIKstarter Enclosure KS7-COC4R (Dimension Code Q4)

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes.

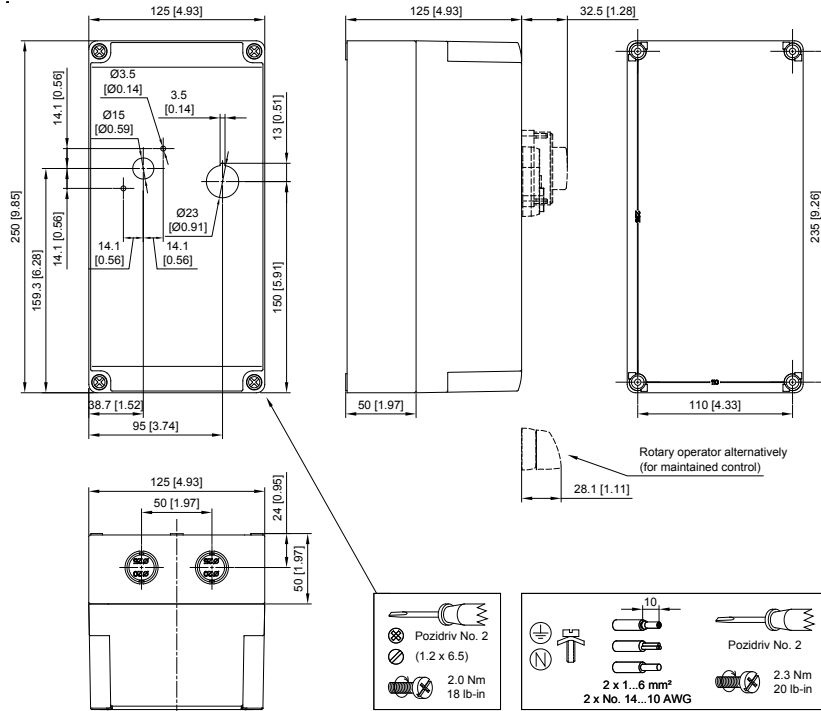

Enclosure Dimensions

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes. See dimension drawings on next page.

IP65 ENCLOSURE

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | |
|---------------|------------|----------------|------|------|-----------|-------------|------|-----|--------------------|--|
| | | A | B | C | | D | E | F | | |
| AY | 1 | 5.91 | 3.54 | 5.12 | N/A | N/A | 5.32 | N/A | N/A | |

TYPE-4/4X/12 ENCLOSURE

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | |
|---------------|------------|----------------|------|------|-----------|-------------|-------|-----|--------------------|--|
| | | A | B | C | | D | E | F | | |
| Q5 | 2 | 7.00 | 5.03 | 5.02 | 4.3 | 4.21 | 6.18 | N/A | N/A | |
| Q6 | 3 | 7.00 | 7.00 | 6.02 | 5.3 | 6.18 | 6.18 | N/A | N/A | |
| Q7 | 4 | 11.87 | 7.31 | 10.6 | 7.23 | 6.54 | 11.10 | N/A | N/A | |

TYPE-4/12 & 12 ENCLOSURES

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | | H |
|---------------|------------|----------------|-------|------|-----------|-------------|-------|-------|--------------------|-----|---|
| | | A | B | C | | D | E | F | | | |
| W6 | 5 | 9.84 | 7.87 | 8.24 | 5.31 | 5.31 | 9.13 | 9.09 | 7.13 | - | |
| W7 | 5 | 13.78 | 11.81 | 10.2 | 7.28 | 9.25 | 13.07 | 13.03 | 11.06 | - | |
| L | 6 | 8 | 6 | 6 | 5.53 | 4 | 8.75 | 6.75 | 4.88 | 9.5 | |

TYPE 4/7/9 ENCLOSURES

| Encl. ID Dim. | Figure No. | Mtg. Dim. | | | Inside Dim. | Outside Dim. | | | | Conduit Entry Top & Bot |
|---------------|------------|-----------|------|------|-------------|--------------|------|-------|------|-------------------------|
| | | A | B | C | | D | E | F | G | |
| EX | 7 | 3.25 | 7.75 | 3.5 | 6.0 | 3.0 | 4.56 | 7.06 | 6.25 | 0.75 |
| EY | 7 | 5.50 | 8.50 | 5.50 | 5.50 | 6.0 | 7.0 | 7.0 | 8.84 | 1.0 |
| EZ | 8 | 9.13 | 4.50 | 6.0 | 8.0 | 6.63 | 9.25 | 11.25 | 9.34 | 1.50 |

Enclosures

See Enclosure Dimension Charts on Previous Page.




FIGURE NO. 1




FIGURE NO. 2




FIGURE NO. 3











FIGURE NO. 4



TYPE 4/12
FIGURE NO. 5



TYPE 12
FIGURE NO. 6






FIGURE NO. 7

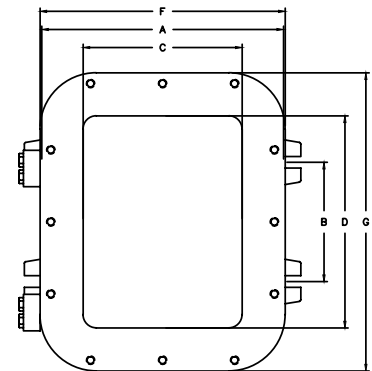


FIGURE NO. 8

F Enclosed Motor Circuit Controllers

Series KT5 Manual Motor Controllers

Versatile, convenient
and space saving...
for a variety of
applications

Sprecher+Schuh's KT5 Manual Motor Controllers are UL Listed as Manual Motor Controllers with optional approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation.

Group motor installations eliminate the need for individual branch short circuit protective devices for each motor circuit, reducing panel space, installation & wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group".

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.



- Disconnect for Motor Branch Circuit
- Manual Switching (Motor control means)
- Overload Protection (Thermal Protection)



These devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Breaker according to IEC 60947-2 standard for application outside of North America.

These devices provide the following functions.

- Disconnect for Motor Branch Circuit
- Magnetic Short-circuit Protection
- Thermal Overload Protection
- Manual Switching (Motor control means)

KT5 devices provide trip class 10A overload protection and phase loss sensitivity protection. These are suitable for single- and three-phase applications.


Group Installation
Single motor taps must be $\frac{1}{3}$ the ampacity of the branch circuit conductors



Group Installation with MPCBs

There is only one Branch Circuit Protective Device (BCPD) for the "Group". Group installation has been successfully used for many years in the U.S. and Canada. It allows "two motors or one or more motors and other loads to be connected to the same branch-circuit..." The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit.

The image below shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

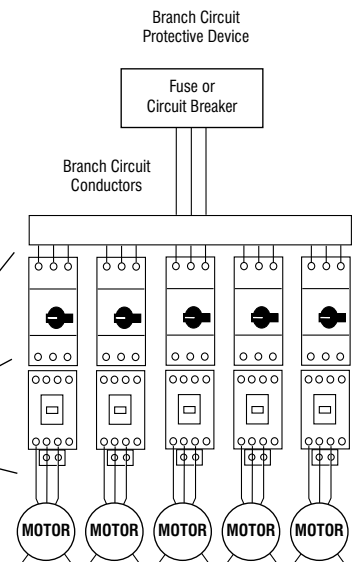

F
KT5 Manual Motor Controllers

KTA5 Manual Motor Controllers

| Max. kW, 3-Phase — AC-3 ❶ | | | | Typical Three Phase [HP] ❶ | | | | Max. Short Circuit Current (kA) | | Current Adjustment Range [A] | Magnetic Release Response Current [A] | Catalog Number |
|---------------------------|----------|------|------|----------------------------|------|------|------|---------------------------------|------|------------------------------|---------------------------------------|----------------|
| 230V | 400/415V | 500V | 690V | 200V | 230V | 460V | 575V | 460V | 575V | | | |
| ~ | 0.02 | 0.06 | 0.06 | ~ | ~ | ~ | ~ | 100 | 30 | 0.10...0.16 | 2 | KTA5-32A-0.16A |
| ~ | 0.04 | 0.09 | 0.09 | ~ | ~ | ~ | ~ | 100 | 30 | 0.16...0.25 | 3.1 | KTA5-32A-0.25A |
| 0.06 | 0.09 | 0.12 | 0.18 | ~ | ~ | ~ | 0.25 | 100 | 30 | 0.25...0.40 | 5 | KTA5-32A-0.4A |
| 0.09 | 0.18 | 0.18 | 0.25 | ~ | ~ | 0.25 | 0.33 | 100 | 30 | 0.40...0.63 | 7.9 | KTA5-32A-0.63A |
| 0.18 | 0.25 | 0.37 | 0.55 | ~ | ~ | 0.5 | 0.75 | 100 | 30 | 0.63...1.0 | 12.5 | KTA5-32A-1.0A |
| 0.25 | 0.55 | 0.75 | 1.1 | 0.25 | 0.33 | 1 | 1 | 100 | 30 | 1.0...1.6 | 20 | KTA5-32A-1.6A |
| 0.37 | 0.75 | 1.1 | 1.8 | 0.5 | 0.75 | 1.5 | 2 | 75 | 30 | 1.6...2.5 | 31.3 | KTA5-32A-2.5A |
| 0.75 | 1.5 | 2.2 | 3 | 1 | 1 | ~ | ~ | 75 | 18 | 2.5...4.0 | 50 | KTA5-32A-4.0A |
| 1.5 | 2.2 | 3 | 4 | 1.5 | 2 | 5 | 5 | 50 | 18 | 4.0...6.3 | 78.8 | KTA5-32A-6.3A |
| 2.2 | 4 | 6.3 | 7.5 | 3 | 3 | 7.5 | 10 | 50 | 18 | 6.3...10 | 150 | KTA5-32A-10A |
| 3 | 5.5 | 6.3 | 7.5 | 3 | 3 | 7.5 | 10 | 50 | 18 | 8.0...12 | 180 | KTA5-32A-12A |
| 4 | 7.5 | 10 | 13 | 5 | 5 | 10 | 15 | 15 | 18 | 10...16 | 240 | KTA5-32A-16A |
| 5.5 | 10 | 11 | 17 | 5 | 7.5 | 15 | 20 | 15 | 18 | 16...20 | 300 | KTA5-32A-20A |
| 5.5 | 11 | 15 | 22 | 7.5 | 7.5 | 20 | 20 | 15 | 18 | 20...25 | 375 | KTA5-32A-25A |
| 7.5 | 15 | 20 | 25 | 7.5 | 10 | 25 | 30 | 15 | 18 | 25...32 | 480 | KTA5-32A-32A |

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.












- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range.
Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A.
Select Catalog Number KTA5-32A-4.0A

KTA5 Selection Using Interrupting Rating/Breaking Capacity

| Catalog Number | Breaking Capacity, IEC 60947-2 | | | | | | | | | | | | | | | | | |
|----------------|--------------------------------|----------------------|---------------------------|----------------------|----------------------|---------------------------|----------------------|----------------------|---------------------------|----------------------|----------------------|---------------------------|----------------------|----------------------|---------------------------|---|----|------|
| | 230V AC | | | 400V AC | | | 440V AC | | | 500V AC | | | 690V AC | | | | | |
| | I _{CS} [kA] | I _{CU} [kA] | Back-up Fuse Rating ❷ [A] | I _{CS} [kA] | I _{CU} [kA] | Back-up Fuse Rating ❷ [A] | I _{CS} [kA] | I _{CU} [kA] | Back-up Fuse Rating ❷ [A] | I _{CS} [kA] | I _{CU} [kA] | Back-up Fuse Rating ❷ [A] | I _{CS} [kA] | I _{CU} [kA] | Back-up Fuse Rating ❷ [A] | | | |
| KTA5-32A-0.16A | 50 | 100 | ~❸ | 50 | 100 | ~❸ | 30 | 100 | ~❸ | 30 | 100 | ~❸ | 30 | 100 | ~❸ | | | |
| KTA5-32A-0.25A | 50 | 100 | | 50 | 100 | | 30 | 100 | | 30 | 100 | | 30 | 100 | | | | |
| KTA5-32A-0.4A | 50 | 100 | | 50 | 100 | | 30 | 100 | | 30 | 100 | | 30 | 100 | | | | |
| KTA5-32A-0.63A | 50 | 100 | | 50 | 100 | | 30 | 100 | | 30 | 100 | | 30 | 100 | | | | |
| KTA5-32A-1.0A | 50 | 100 | | 50 | 100 | | 30 | 100 | | 30 | 100 | | 30 | 100 | | | | |
| KTA5-32A-1.6A | 50 | 100 | | 50 | 100 | | 30 | 100 | | 30 | 100 | | 30 | 100 | | | | |
| KTA5-32A-2.5A | 50 | 75 | | 50 | 75 | | 10 | 30 | | 25 ❹ | 10 | | 20 | 25 ❹ | | 5 | 10 | 25 ❹ |
| KTA5-32A-4.0A | 50 | 75 | | 50 | 75 | | 6 | 18 | | 25 ❹ | 6 | | 15 | 25 ❹ | | 2 | 3 | 25 ❹ |
| KTA5-32A-6.3A | 50 | 50 | | 50 | 50 | | 6 | 18 | | 63 ❹ | 6 | | 10 | 63 ❹ | | 2 | 3 | 40 ❹ |
| KTA5-32A-10A | 50 | 50 | | 50 | 50 | | 6 | 18 | | 63 ❹ | 6 | | 10 | 63 ❹ | | 2 | 3 | 50 ❹ |
| KTA5-32A-12A | 25 | 50 | 80 ❹ | 25 | 50 | 80 ❹ | 6 | 15 | 63 ❹ | 6 | 10 | 63 ❹ | 2 | 3 | 50 ❹ | | | |
| KTA5-32A-16A | 15 | 15 | 40 ❹ | 15 | 15 | 40 ❹ | 4 | 6 | 63 ❹ | 4 | 6 | 63 ❹ | 2 | 3 | 63 ❹ | | | |
| KTA5-32A-20A | 10 | 15 | 125 ❹ | 10 | 15 | 125 ❹ | 3 | 6 | 125 ❹ | 3 | 6 | 125 ❹ | 2 | 3 | 80 ❹ | | | |
| KTA5-32A-25A | 10 | 15 | 125 ❹ | 10 | 15 | 125 ❹ | 3 | 6 | 125 ❹ | 3 | 6 | 125 ❹ | 2 | 3 | 100 ❹ | | | |
| KTA5-32A-32A | 10 | 15 | 125 ❹ | 10 | 15 | 125 ❹ | 3 | 6 | 125 ❹ | 3 | 6 | 125 ❹ | 2 | 3 | 100 ❹ | | | |





- ❶ Horsepower ratings shown are for reference. The final selection of the controller depends on the actual motor full load current.
- ❷ Back-up fuses are type gG, aM.
- ❸ No back-up fuse required if I_{cc} < I_{cs}.
- ❹ Rated back-up fuse for short-circuit up to 50 kA.

Accessories for KT5





| Accessory | Description | Auxiliary | | Connection Diagram and Terminal Markings ⌀ | For Use With | Pkg Qty | Catalog Number |
|--|--|---------------|-----|---|--------------|---------|----------------|
| | | N.O | N.C | | | | |
|  | Front mounted Auxiliary Contact • No additional space required • 1 and 2-pole | 1 | 1 |  | KT5 | 10 | KT5-PE1-11 |
| | | 1 | 0 |  | | | KT5-PE1-10 |
| | | 0 | 1 |  | | | KT5-PE1-01 |
| | | 2 | 0 |  | | | KT5-PE1-20 |
|  | Right-side-mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the Manual Motor Starter • Use compact bus bars with 54 mm spacing | 1 | 1 |  | KT5 | 2 | KT5-PA1-11 |
| | | 2 | 0 |  | | | KT5-PA1-20 |
| | | 0 | 2 |  | | | KT5-PA1-02 |
| | | Lead Contacts | |  | | | KT5-PA1-20L |
| | | 2 | 0 |  | | | |

F KT5 Manual Motor Controllers



Trip Contacts

| Accessory | Description | Auxiliary Contacts | | Connection Diagram and Terminal Markings ⌀ | For Use With | Pkg Qty | Catalog Number |
|---|---|--------------------|-----|---|--------------|---------|----------------|
| | | N.O | N.C | | | | |
|  | Right-side-mounted Trip Signaling Contact • 2-pole • Adds 9 mm to the width of the Manual Motor Starter • Use compact bus bars with 54 mm spacing | 1 | 1 |  | KT5 | 2 | KT5-PAF1-S11 |
| | | 2 | 0 |  | | | KT5-PAF1-S20 |
| | | 0 | 2 |  | | | KT5-PAF1-S02 |



Accessories for KT5

| Accessory | Description | Connection Diagram | AC Coil Voltage | Pkg Qty | For Use With | Catalog Number |
|---|---|---|--------------------------|---------|--------------|----------------|
|  | Undervoltage Trip Release <ul style="list-style-type: none"> Left-side mounted Adds 18 mm to the width of the Manual Motor Starter |  | 20V, 50 Hz/ 24V, 60 Hz | 1 | KT5 | KT5-UA-24V |
| | | | 24V, 50 Hz | | | KT5-UA-28V |
| | | | 48V, 50 Hz | | | KT5-UA-48V |
| | | | 60V, 50 Hz | | | KT5-UA-60V |
| | | | 110V, 50 Hz/ 120V, 60 Hz | | | KT5-UA-120V |
| | | | 208V, 60 Hz | | | KT5-UA-208V |
| | | | 230V, 50 Hz/ 240V, 60 Hz | | | KT5-UA-240V |
| | | | 400V, 50 Hz | | | KT5-UA-400V |
| | | | 415V, 50 Hz/ 480V, 60 Hz | | | KT5-UA-480V |
| | | | 575V, 60 Hz | | | KT5-UA-575V |
|  | Shunt Trip Release <ul style="list-style-type: none"> Left-side mounted Adds 18 mm to the width of the Manual Motor Starter |  | 20-24 V, 50/60 Hz | 1 | KT5 | KT5-AA-24V |
| | | | 110V, 50/60 Hz | | | KT5-AA-110V |
| | | | 200...240V, 50/60 Hz | | | KT5-AA-240V |
| | | | 350...415V, 50/60 Hz | | | KT5-AA-415V |

Bus Bars

| Accessory | Description | Connection Diagram | Terminal Links | Pkg Qty | For Use With | Catalog Number | |
|---|---|---|--|-------------------|--------------|----------------|----------------|
|  | Compact Bus Bars <ul style="list-style-type: none"> UL: 600V, 60 A IEC: 690V, 65 A | <ul style="list-style-type: none"> 45 mm spacing For use with front-mounted auxiliary contact | 2 x 3 connections | 10 | KT5 | KT5-32-DB-45-2 | |
| | | | 3 x 3 connections | | | KT5-32-DB-45-3 | |
| | | | 4 x 3 connections | | | KT5-32-DB-45-4 | |
| | | | 5 x 3 connections | | | KT5-32-DB-45-5 | |
| | | | <ul style="list-style-type: none"> 54 mm spacing For use with side-mounted auxiliary contact | 2 x 3 connections | 10 | KT5 | KT5-32-DB-54-2 |
| | | | | 3 x 3 connections | | | KT5-32-DB-54-3 |
| | | | | 4 x 3 connections | | | KT5-32-DB-54-4 |
| | | | | 5 x 3 connections | | | KT5-32-DB-54-5 |
| | | | <ul style="list-style-type: none"> 63 mm spacing For use with side-mounted trip release | 2 x 3 connections | 10 | KT5 | KT5-32-DB-63-2 |
| | | | | 3 x 3 connections | | | KT5-32-DB-63-3 |
| | | | | 4 x 3 connections | | | KT5-32-DB-63-4 |
| | | | | 5 x 3 connections | | | KT5-32-DB-63-5 |
|  | Bus Bar Feeder Terminal (Flat) <ul style="list-style-type: none"> Supply of compact bus bars Increases terminal capacity | | | 10 | KT5-32-DB | KT5-32-A3N | |
| | Bus Bar Feeder Terminal (High) <ul style="list-style-type: none"> Supply of compact bus bars Increases terminal capacity | | | | | 10 | KT5-32-A3NH |

Connecting Modules

| Accessory | Description | Pkg Qty | For Use With | Catalog Number |
|---|--|---------|-------------------|----------------|
|  | Connecting Module - 12 A <ul style="list-style-type: none"> For DOL Starters Starters mount on single DIN Rail (KT5 on DIN rail) Electrical and mechanical interconnection of KT5 and CA8 Contactors | 1 | KT5 to CA8 | KT5-32-PEK12 |
|  | Connecting Module - 25 A <ul style="list-style-type: none"> For DOL Starters Starters mount on single DIN Rail (KT5 on DIN rail) Electrical and mechanical interconnection of KT5 and CA7 Contactors | 1 | KT5 to CA7-9...23 | KT5-32-PEC23 |






Accessories for KT5

| Accessory | Description | Color | Legend | For Use with | Pkg Qty | Catalog Number |
|---|--|-----------------------------------|---------------------------|--------------|---------|----------------|
|  | Blank Space Cover • For covering unused terminal links • Must be ordered in multiples of 10 (10pcs/pkg) | Gray/Black | | KT5 | 50 | KT5-WSN |
|  | Screw Adapter • For screw arrangement of a motor protection circuit breaker • Hat (DIN) Rail 35 x 7.5 mm • 44 mm length | Red/Yellow | | KT5 | 10 | KT5-N45 |
|  | Enclosure • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12 | Red/Yellow | 0 - I OFF -ON Trip | KT5 | 1 | KT5-ENY65 |
| | | Black Handle | | | | KT5-ENN65 |
|  | Door Mounting Kit • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12 | Red/Yellow | 0 - I OFF -ON Trip | KT5 | 1 | KT5-DMY65 |
| | | Black Handle | | | | KT5-DMN65 |
|  | Door Coupling Handle • Up to three padlocks in OFF position • Defeatable | Red/Yellow | 0 - I OFF -ON Trip | KT5 | 1 | KT5-HCRY |
| | | Black/Black | 0 - I OFF - ON Trip | | | KT5-HTC |
|  | Coupler • Coded - Positioning of ON indication dependent from mounting orientation of the KT5 • Uncoded - Positioning of ON indication independent from mounting orientation of the KT5 | Driver with screw | | KT5 | 1 | KT5-DNC |
| | | Driver without coding, with screw | | | | KT5-DNUC |
|  | Shaft Alignment Ring • Supports the long shafts for alignment to the handle inlet. It makes closing panel doors easier • Use for shafts | | | KT5 | 1 | KT5-SAR |
|  | Extension Shaft | 105 mm (4.13 in.) | | KT5 | 10 | KT5-HT |
| | | 180 mm (7.1 in.) | | | | KT5-HTM |
|  | Extension Shaft Support • Supports the shaft in the extension of handle (KT5-HTC/KT5-HTRY) • Required for shaft lengths > 130 mm (5.1 in.) • Snaps on the right side of the KT5 controller • Width 9 mm. • For use with screw-mounted or hat rail mounted devices. | | | KT5 | 1 | KT5-SHS |
|  | Lockable Handle Accessory • For locking KT5 devices in the OFF position | | | KT5 | 10 | KT5-KN |

Technical Information

| | | | |
|--|-------------------------------|--|------------------------------|
| Standards Compliance | IEC | IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947-1 | |
| | cULus | UL 60947-1, UL 60947-4-1 | |
| Certification | Global | RINA (Marine) | |
| | Regional | CCC, KC, EAC, CE, IEC, cULus, CB Scheme | |
| Rated Operating Voltage | IEC [V] | 690 | |
| | UL, CSA [V] | 600 | |
| Rated Impulse Withstand Voltage | Main Circuits | 6kV | |
| | Auxiliary Circuits | 6kV | |
| Rated Frequency | [Hz] | 50...60 | |
| Rated Operating Current | [A] | 0.1...32 (15 ranges) | |
| Number of Operations | Mechanical [operations] | 100,000 Cycles | |
| | Electrical [operations] | 100,000 Cycles (0.1...16A); 50,000 Cycles (20...32A) | |
| Ambient Temperature | Storage | -50...+80°C (-58...+176°F) | |
| | Operating | Open-compensated | -25...+55°C (-13...+131°F) ❶ |
| | | Open | -25...+70°C (-13...+158°F) ❶ |
| | | Enclosed | 0...+40°C (32...104°F) |
| Maximum Operating Altitude Permissible | | 2000m | |
| Pollution Degree | | 3 | |
| Phase loss sensitivity | | Yes | |
| Disconnect Function per IEC/60947-2 | | Yes | |
| Resistance to shock per IEC 60068-2-27 | | 25g/11ms | |
| Resistance to vibration per IEC 60068-2-6 | | 5g/3...150Hz | |
| Minimum distance to other units same type | Horizontal | 0 mm (0 in.) | |
| | Vertical | 150 mm (5.9 in.) | |
| Minimum Distance to Electrical Conductive Bus Bar | Horizontal, up to 400V | 0mm (0 in.) | |
| | Vertical, up to 690V | > 1.5mm (0.06 in.) | |
| Degree of Protection | Housing | IP20 | |
| | Mwain Terminal | IP10 | |
| Utilization Category | IEC 60947-2 (Circuit breaker) | A | |
| | IEC 60947-4-1 (Motor Starter) | AC-3 | |
| Power Loss in all three poles up to: | 0.16...1.6A | 5.1 W | |
| | 2.5...6.3A | 5.4 W | |
| | 10...12A | 7.2 W | |
| | 16...25A | 8.4 W | |
| | 32A | 9.3 W | |

Terminal Connections

| Connection | | No. of Conductors | Devices Rated ≤ 16 A | Devices Rated 20...32 A |
|--------------------|-----------------------|--|---|--|
| Type of terminals | | |  | |
| Connection Screw | | | M3.5/Pozidriv No.2 | M4/Pozidriv No.2 |
| Wiring | Solid |  1 or 2 | 1...4 mm ² | 1...2.5 mm ² 2.5...6 mm ² |
| | Flexible with ferrule |  1 or 2 | 0.75...2.5 mm ² | 0.75...6 mm ² |
| | Flexible |  1 or 2 | 0.75...2.5 mm ² / No. 16...12 AWG | 1.5...2.5 mm ² / No.16...8 AWG 2.5...6 mm ² / No.16...8 AWG |
| | Stranded per UL/CSA |  1 or 2 | 1...4 mm ² / No. 16...12 AWG | 1...2.5 mm ² / No.16...8 AWG 2.5...6 mm ² / No.16...8 AWG |
| | Stripping length | | 9 mm (0.35 in.) | 10 mm (0.39 in.) |
| Tightening torques | | | 0.8...1.2 N•m / 7...10 lb•in | 2 N•m / 18 lb•in |

❶ With derating. See UL/CSA Listed Applications ratings table on page F120.7

UL/CSA Listed Application Ratings, Manual Motor Controller Only

| Catalog Number | UL 60947-4-1 — Manual Motor Controller | | | | |
|----------------|---|---------------------------------|------|--------------------|------|
| | Branch Circuit Protection Max. Size per NEC/CEC [A] | Max. Short Circuit Current [kA] | | | |
| | | Motor Disconnect | | Group Installation | |
| | | 480V | 600V | 480V | 600V |
| KTA5-32A-0.16A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.25A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.4A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.63A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.0A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.6A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-2.5A | 175 | 30 | 5 | 30 | 5 |
| KTA5-32A-4.0A | 175 | 18 | 5 | 18 | 5 |
| KTA5-32A-6.3A | 175 | 18 | 5 | 18 | 5 |
| KTA5-32A-10A | 175 | 18 | 5 | 18 | 5 |
| KTA5-32A-12A | 175 | 18 | 5 | 18 | 5 |
| KTA5-32A-16A | 175 | 18 | 5 | 18 | 5 |
| KTA5-32A-20A | 400 | 18 | 5 | 18 | 5 |
| KTA5-32A-25A | 400 | 18 | 5 | 18 | 5 |
| KTA5-32A-32A | 400 | 18 | 5 | 18 | 5 |

Application Ratings, KT5 to CA8 Miniature Contactors

| Catalog Number | UL 60947-4-1 — Manual Motor Controller | | | | | |
|----------------|---|---------------------------------|---------------------------------|------|--------------------|------|
| | Max. Fuse or Circuit Breaker Size per NEC [A] | For Use With Contactor Cat. No. | Max. Short Circuit Current [kA] | | | |
| | | | Motor Disconnect | | Group Installation | |
| | | | 480V | 600V | 480V | 600V |
| KTA5-32A-0.16A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.25A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.4A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.63A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.0A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.6A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-2.5A | 175 | CA8-09 | 30 | 5 | 30 | 5 |
| KTA5-32A-4.0A | 175 | CA8-09 | 18 | 5 | 18 | 5 |
| KTA5-32A-6.3A | 175 | CA8-12 | 18 | 5 | 18 | 5 |
| KTA5-32A-10A | 175 | CA8-12 | 18 | 5 | 18 | 5 |
| KTA5-32A-12A | 175 | CA8-12 | 18 | 5 | 18 | 5 |
| KTA5-32A-16A | 175 | CA8-12 | 18 | ~ | 18 | ~ |

F
KT5 Manual Motor Controllers

Application Ratings, KT5 to CA7 Contactors

| Catalog Number | UL 60947-4-1 — Manual Motor Controller | | | | | |
|----------------|---|---------------------------------|---------------------------------|------|--------------------|------|
| | Max. Fuse or Circuit Breaker Size per NEC [A] | For Use With Contactor Cat. No. | Max. Short Circuit Current [kA] | | | |
| | | | Motor Disconnect | | Group Installation | |
| | | | 480V | 600V | 480V | 600V |
| KTA5-32A-0.16A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.25A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.4A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-0.63A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.0A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-1.6A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-2.5A | 175 | CA7-9 | 30 | 5 | 30 | 5 |
| KTA5-32A-4.0A | 175 | CA7-9 | 18 | 5 | 18 | 5 |
| KTA5-32A-6.3A | 175 | CA7-9 | 18 | 5 | 18 | 5 |
| KTA5-32A-10A | 175 | CA7-9 | 18 | 5 | 18 | 5 |
| KTA5-32A-12A | 175 | CA7-12 | 18 | 5 | 18 | 5 |
| KTA5-32A-16A | 175 | CA7-16 | 18 | 5 | 18 | 5 |
| KTA5-32A-20A | 400 | CA7-23 | 18 | 5 | 18 | 5 |
| KTA5-32A-25A | 400 | CA7-30 | 18 | 5 | 18 | 5 |
| KTA5-32A-32A | 400 | CA7-30 | 18 | 5 | 18 | 5 |

Type 2 Coordination Ratings, KT5 to CA7 Contactors, Standard Motor Protection

| Catalog Number | IEC 60947-4-1 | | UL 60947-4-1 | | | | | |
|----------------|---------------------------------|---------------------------------|---|---------------------------------|---------------------------------|---|---------------------------------|---------------------------------|
| | 400/415V | | 480V | | | 600V | | |
| | Max. Short Circuit Current [kA] | For Use With Contactor Cat. No. | Max. Fuse or Circuit Breaker Size per NEC [A] | Max. Short Circuit Current [kA] | For Use With Contactor Cat. No. | Max. Fuse or Circuit Breaker Size per NEC [A] | Max. Short Circuit Current [kA] | For Use With Contactor Cat. No. |
| KTA5-32A-0.16A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-0.25A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-0.4A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-0.63A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-1.0A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-1.6A | 50 | CA7-9 | 175 | 30 | CA7-9 | 175 | 5 | CA7-9 |
| KTA5-32A-2.5A | 50 | CA7-9 | 175 | 30 | CA7-12 | 175 | 5 | CA7-12 |
| KTA5-32A-4.0A | 50 | CA7-9 | 175 | 18 | CA7-23 | 175 | 5 | CA7-23 |
| KTA5-32A-6.3A | 50 | CA7-9 | 175 | 18 | CA7-23 | 175 | 5 | CA7-23 |
| KTA5-32A-10A | 50 | CA7-9 | 175 | 18 | CA7-30 | 175 | 5 | CA7-30 |
| KTA5-32A-12A | 25 | CA7-12 | 175 | 18 | CA7-30 | 175 | 5 | CA7-30 |
| KTA5-32A-16A | 16 | CA7-23 | 175 | 18 | CA7-30 | 175 | 5 | CA7-30 |
| KTA5-32A-20A | 10 | CA7-30 | 400 | 18 | CA7-30 | 400 | 5 | CA7-30 |
| KTA5-32A-25A | 10 | CA7-30 | 400 | 18 | CA7-30 | 400 | 5 | CA7-30 |
| KTA5-32A-32A | 10 | CA7-30 | 400 | 18 | CA7-30 | 400 | 5 | CA7-30 |

Auxiliary Contact, Signaling Contact, and Short-circuit Signaling Contact Specifications

| Specifications of Accessories | | KT5-PA... Side-mounted Auxiliary, Signaling, and Short-circuit Signaling Contacts | KT5-PE... Front-mounted Auxiliary Contacts |
|--|---------------------|---|---|
| Standards Compliance | IEC UL/cULus | IEC/EN 60947-1, IEC/EN 60947-5-1 UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1 | IEC/EN 60947-1, IEC/EN 60947-5-1 UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1 |
| Rated Operating Voltage | [U _e] | 690V AC/600V DC | 250V AC / 250V DC |
| Rated Thermal Current | [I _{th}] | 6 A | 5 A |
| Rated Frequency | [Hz] | 50...60 | 50...60 |
| Rated Impulse withstand Voltage | [U _{imp}] | 6 kV | 6 kV |
| Rated insulation voltage | [U _i] | 690 V AC | 250 V AC |
| Pollution Degree | | 3 | 3 |
| Ambient Temperature | Operation | -25... +60 °C (-13... +140 °F) | -25... +60 °C (-13... +140 °F) |
| | Storage | -50... +80 °C (-58... +176 °F) | -50... +80 °C (-58... +176 °F) |
| Resistance to shock per IEC 60068-2-27 | | 25g / 11 ms | 25g / 11 ms |
| Resistance to vibrations per IEC 60068-2-6 | | 5g / 3...150 Hz | 5g / 3...150 Hz |
| Rated operational current I_e AC-15 per IEC/EN 60947-5-1 for utilization category | 24 V, 120 V | 6 A | 3 A |
| | 240 V | 4 A | 1.5 A |
| | 400 V | 3 A | ~ |
| | 440 V, 690 V | 1 A | ~ |
| Rated operational current I_e DC-13 per IEC/EN 60947-5-1 for utilization category | 24 V | 2 A | 1 A |
| | 125 V | 0.55 A | 250 V 0.27 A |
| | 250 V | 0.27 A | 0.11 A |
| | 440 V, 600 V | 0.15 A | ~ |
| Minimum switching capacity | | 17 V DC / 5 mA | 17V DC / 5 mA |
| Short-circuit protective device (N.O, N.C) | | 10 A Type gG | 10 A Type gG |
| Duty time | | 100 % | 100 % |
| Mounting | | Right side | Front |
| Number of operations | Mechanical | 50,000 cycles | 50,000 cycles |
| | Electrical | | |
| Contact utilization characteristics according to UL/CSA | | | |
| Rated operating voltage U_e per UL/CSA | | 600 V AC / 600 V DC | 250V AC / 250V DC |
| Pilot duty | | B600, Q600 | B300, R300 |
| AC thermal rated current | | 5A | 5 A |
| AC maximum volt-ampere | making | 3600 | 3600 VA |
| | breaking | 360 | 360 VA |
| DC thermal rated current | | 2.5 A | 2.5 A |
| DC maximum volt-ampere | making | 69 VA | 28 VA |
| | breaking | | |





Undervoltage Release Specifications

| Attribute | Value | |
|--|--------------------------------------|---|
| Standards compliance | IEC | IEC/EN 60947-1, IEC/EN 60947-5-1 |
| | UL/cULus | UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1 |
| Rated control supply voltage | See Catalog page F120.4 | |
| Rated frequency | See Catalog page F120.4 | |
| Operating voltage | Tripping | $0.35 \dots 0.7 \times U_s$ |
| | Coil | $0.85 \dots 1.1 \times U_s$ |
| Rated impulse withstand voltage | [U _{imp}] | 6 kV |
| Rated insulation voltage | [U _i] | 690V |
| Pollution degree | 3 | |
| Ambient air temperature | Operation | -25...+60 °C (-13...+140 °F) |
| | Storage | -50...+80 °C (-58...+176 °F) |
| Resistance to shock per IEC 60068-2-27 | 25g / 11 ms | |
| Resistance to vibrations per IEC 60068-2-6 | 5g / 3...150 Hz | |
| Mounting | left side of Manual Motor Controller | |

Shunt Trip Specifications

| Attribute | Value | |
|--|--------------------------------------|---|
| Standards compliance | IEC | IEC/EN 60947-1, IEC/EN 60947-5-1 |
| | UL/cULus | UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1 |
| Rated control supply voltage | See Catalog page F120.4 | |
| Rated frequency | See Catalog page F120.4 | |
| Operating voltage | Tripping | $0.7 \dots 1.1 \times U_s$ |
| Rated impulse withstand voltage | [U _{imp}] | 6 kV |
| Rated insulation voltage | [U _i] | 690V |
| Pollution degree | 3 | |
| Ambient air temperature | Operation | -25...+60 °C (-13...+140 °F) |
| | Storage | -50...+80 °C (-58...+176 °F) |
| Resistance to shock per IEC 60068-2-27 | 15g/11ms | |
| Resistance to vibrations per IEC 60068-2-6 | 5g / 3...150 Hz | |
| Mounting | left side of Manual Motor Controller | |

Terminal Connections






| Connection | | No. of Conductors | Side Mounted | Front Mounted |
|-------------------------|-----------------------|--|----------------------------|-------------------------|
| Wiring | Solid |  1 or 2 | 1...1.5 mm ² | 1...2.5 mm ² |
| | Flexible with ferrule |  1 or 2 | 0.75...1.5 mm ² | |
| | Flexible |  1 or 2 | 0.75...1.5 mm ² | |
| | Stranded per UL/CSA |  1 or 2 | No. 16...14 AWG | |
| | Stripping length | | | 8 mm (0.31 in.) |
| Tightening torques | | | 0.8...1.2 N•m / 7lb•in | |
| Recommended screwdriver | | | PoziDriv No.2 | |

IEC Performance Data

Feeder Terminal and Bus Bar Current Ratings

| Attribute | KT5-32-DB-45..., -54..., -63... | KT5-32-A3N... |
|---------------------------------|---------------------------------|-----------------------------------|
| Rated operational voltage | U _e | 690 V |
| | U _e per UL/CSA | 600V AC |
| Rated operational current | I _e | 65 A |
| | U _e per UL/CSA | 60 A |
| Suitable for enclosure size | (UL) | 200% of Size of KT5 with bus bars |
| Rated frequency | | 50/60 Hz |
| Rated impulse withstand voltage | U _{imp} | 6 kV |
| Rated insulation voltage | U _i | 690V AC |


Main Circuit Connecting Characteristics

| Connection | No. of Conductors | Value | |
|-------------------------|---|--------------------|------------------------|
| Wiring | Solid  | 1 | 6...25 mm ² |
| | Flexible with ferrule  | 1 | 6...16 mm ² |
| | Flexible with insulated ferrule  | 1 | 6...16 mm ² |
| | Flexible  | 1 | 6...16 mm ² |
| | Stranded per UL/CSA  | 1 | No. 10...4 AWG |
| | Stripping length | | 10 mm (0.39 in.) |
| Tightening torques | | 2.5 N•m / 22 lb•in | |
| Recommended screwdriver | | Pozidriv No.2 | |


Weights

| Description | Catalog Number | Weight | Description | Catalog Number | Weight | Description | Catalog Number | Weight |
|-------------------------------------|----------------|-------------|-------------------------|-------------------|----------------|-------------------|----------------|--------|
| Motor Controllers | KTA5-32A-0.16A | 246 g | Undervoltage Trip | KT5-AA-24V | 110 g | Blank space cover | KT5-WSN | 4 g |
| | KTA5-32A-0.25A | | | KT5-AA-110V | | Screw adapter | KT5-N45 | 2 g |
| | KTA5-32A-0.4A | | | KT5-AA-240V | | Lockable handle | KT5-KN | 6 g |
| | KTA5-32A-0.63A | | | KT5-AA-415V | | Enclosure | KT5-ENY65 | 428 g |
| | KTA5-32A-1.0A | | | KT5-UA-24V | | KT5-ENN65 | 435 g | |
| | KTA5-32A-1.6A | | KT5-UA-28V | Door mounting kit | KT5-DMY65 | 258 g | | |
| | KTA5-32A-2.5A | KT5-UA-48V | KT5-DMN65 | 268 g | | | | |
| | KTA5-32A-4.0A | KT5-UA-60V | Door coupling handle | KT5-HCRY | 78 g | | | |
| | KTA5-32A-6.3A | KT5-UA-120V | | KT5-HTC | 80 g | | | |
| | KTA5-32A-10A | KT5-UA-208V | Extension shaft | KT5-HT | 28 g | | | |
| | KTA5-32A-12A | KT5-UA-240V | Coupler | KT5-HTM | 50 g | | | |
| | KTA5-32A-16A | KT5-UA-400V | | KT5-DNC | 17 g | | | |
| | KTA5-32A-20A | KT5-UA-480V | Shaft alignment ring | KT5-DNUC | 4 g | | | |
| | KTA5-32A-25A | KT5-UA-575V | KT5-SAR | 22 g | | | | |
| KTA5-32A-32A | KT5-32-DB-45-2 | 37 g | Extension shaft support | KT5-SHS | 50 g | | | |
| Auxiliary contacts - internal mount | KT5-PE1-11 | 20 g | Bus Bar connections | KT5-32-DB-45-3 | 58 g | Connecting module | KT5-32-PEC23 | 23 g |
| | KT5-PE1-10 | 16 g | | KT5-32-DB-45-4 | 81 g | | | |
| | KT5-PE1-01 | 16 g | | KT5-32-DB-45-5 | 103 g | | | |
| | KT5-PE1-20 | 20 g | | KT5-32-DB-45-2 | 39 g | | | |
| Auxiliary contacts - side mount | KT5-PA1-11 | 80 g | | KT5-32-DB-54-2 | 39 g | | | |
| | KT5-PA1-20 | | | KT5-32-DB-54-3 | 60 g | | | |
| | KT5-PA1-02 | | | KT5-32-DB-54-4 | 90 g | | | |
| | KT5-PA1-20L | | | KT5-32-DB-54-5 | 113 g | | | |
| Trip contacts - side mount | KT5-PAF1-S11 | 80 g | | KT5-32-DB-63-2 | 43 g | | | |
| | KT5-PAF1-S20 | | | KT5-32-DB-63-3 | 70 g | | | |
| | KT5-PAF1-S02 | | | 41 g | KT5-32-DB-63-3 | 70 g | | |
| | | | | KT5-32-DB-63-4 | 94 g | | | |
| | | | | KT5-32-DB-63-5 | 123 g | | | |
| | | | | KT5-32-A3N | 41 g | | | |
| | KT5-32-A3NH | 51 g | | | | | | |

KT5 Wiring Example

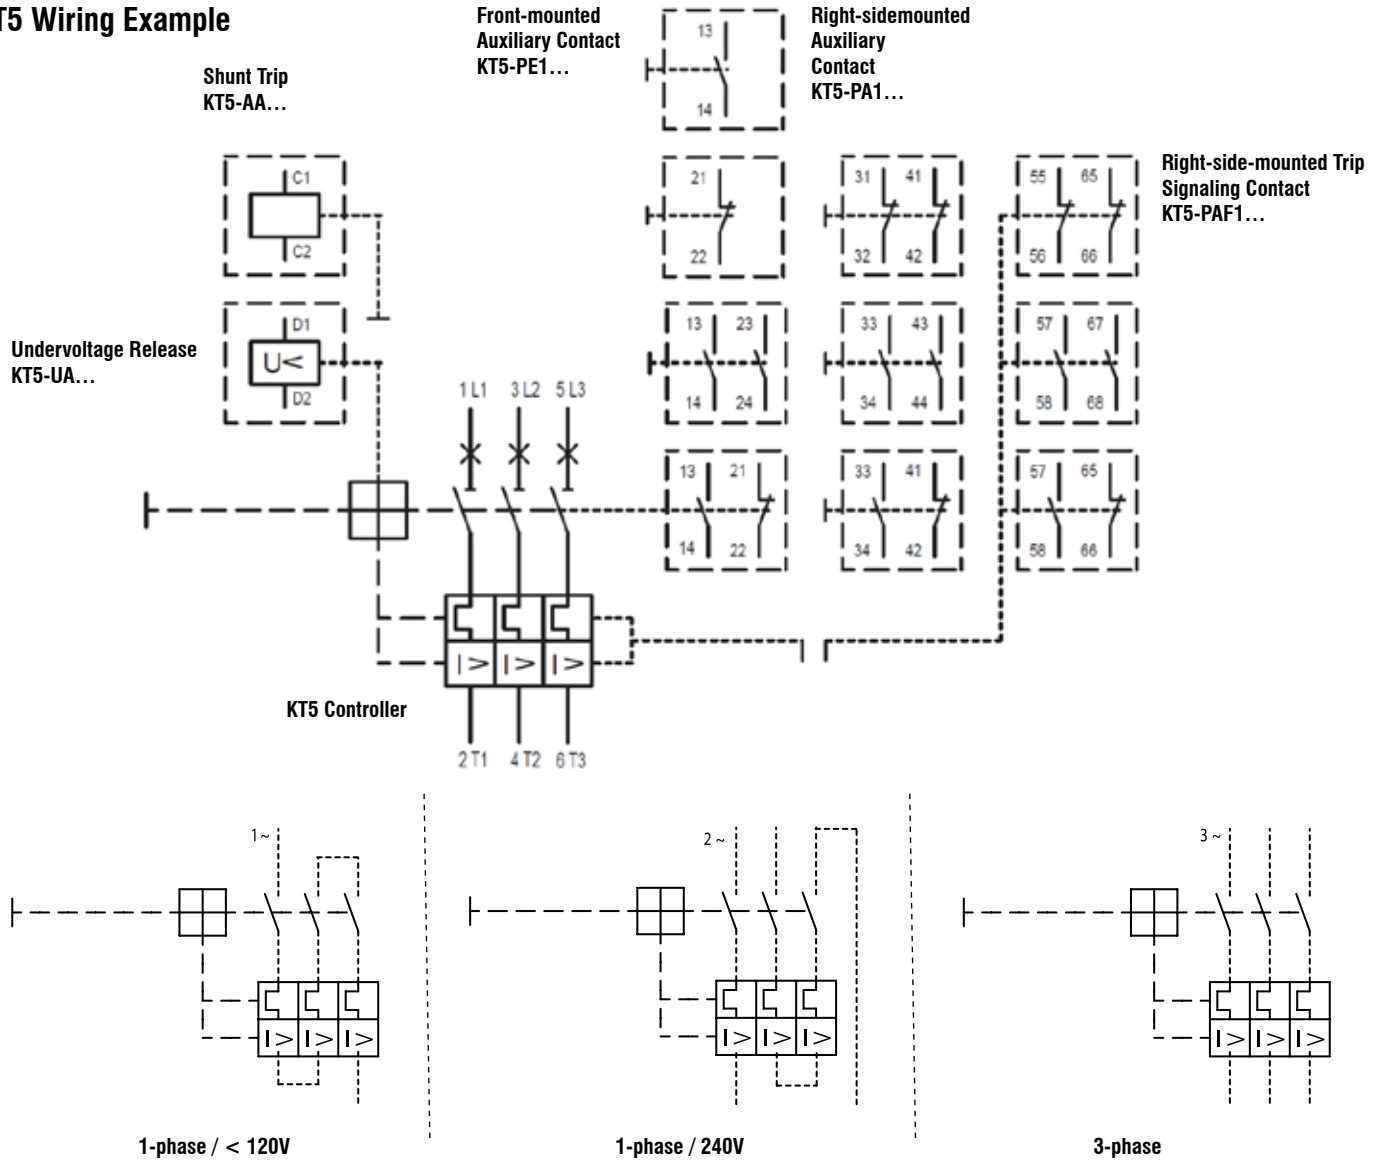


KT5 Mounting Position

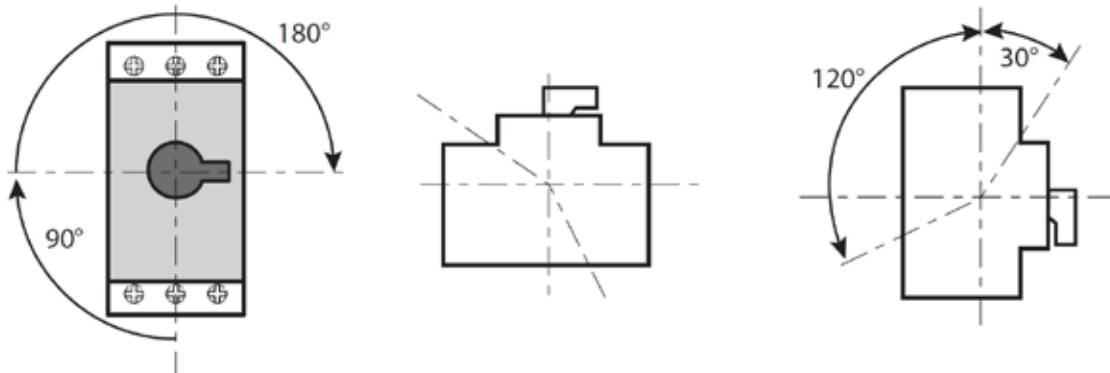


ⓘ No backup fuse required.

KTA5-32A-0.16A...16A Manual Motor Controller

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

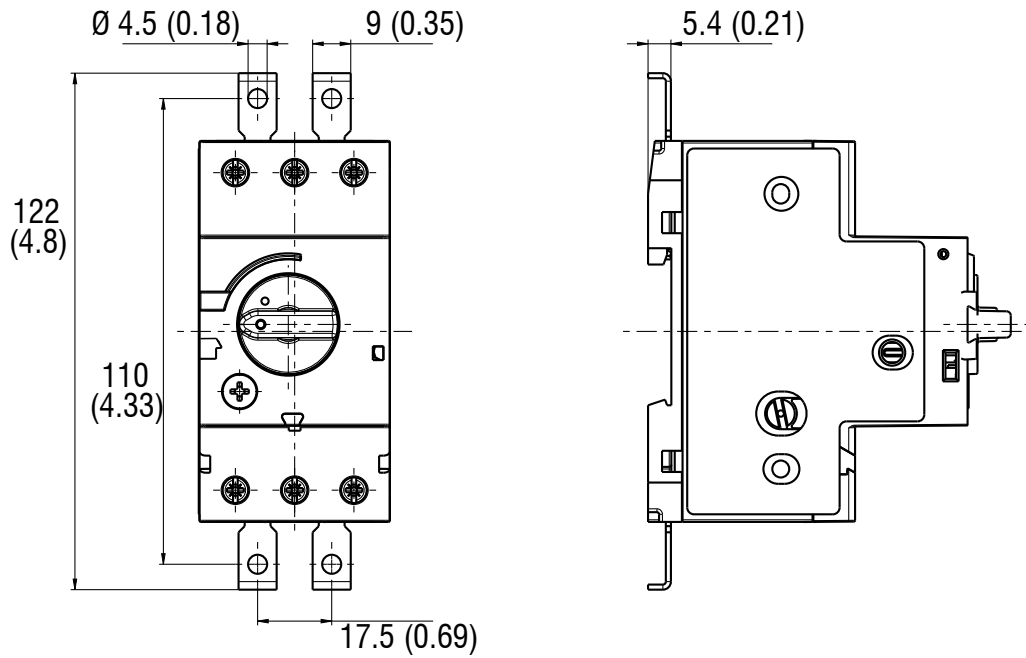


KTA5-32A-0.16A...16A Manual Motor Controller (with Accessories)

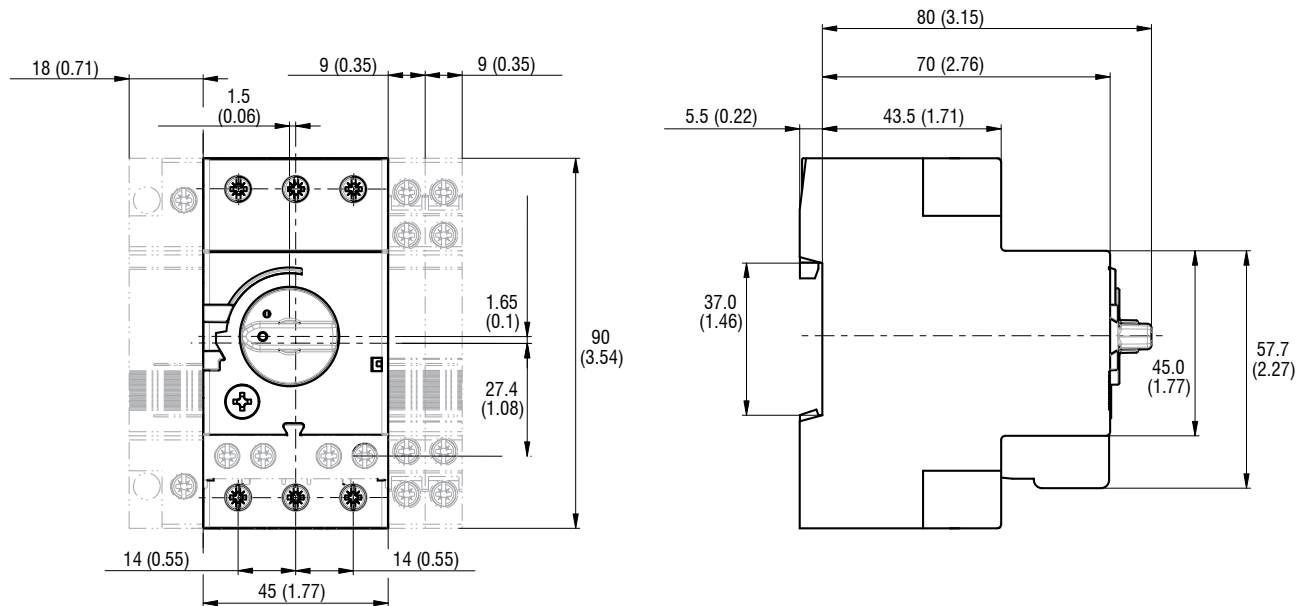


F
 KT5 Manual Motor Controllers

KTA5-32A-20A...32A Manual Motor Controller

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

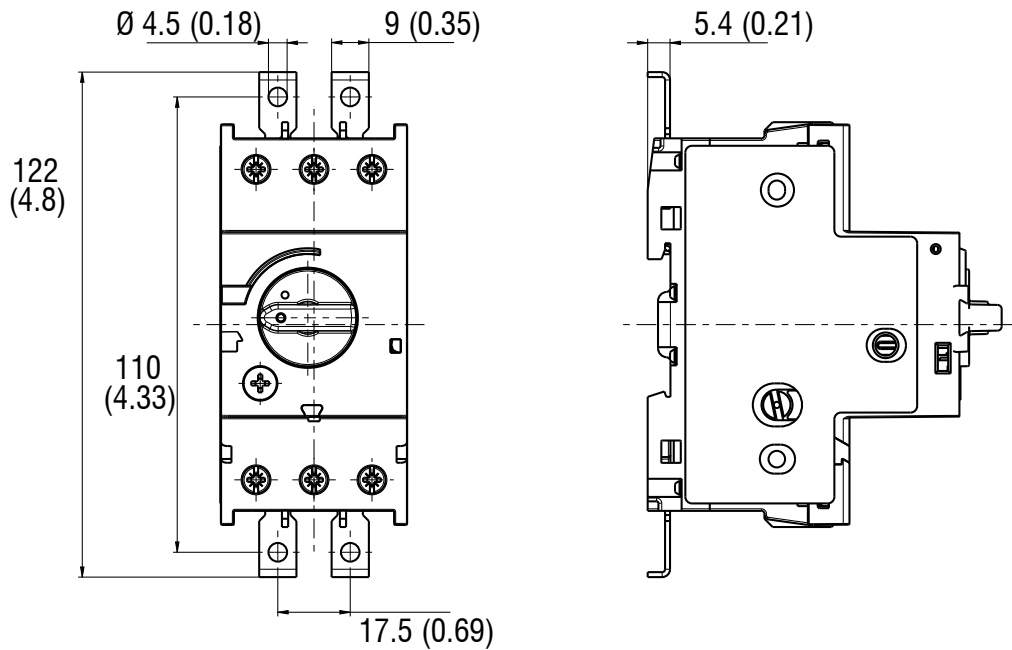

KTA5-32A-20A...32A Manual Motor Controller (with Accessories)

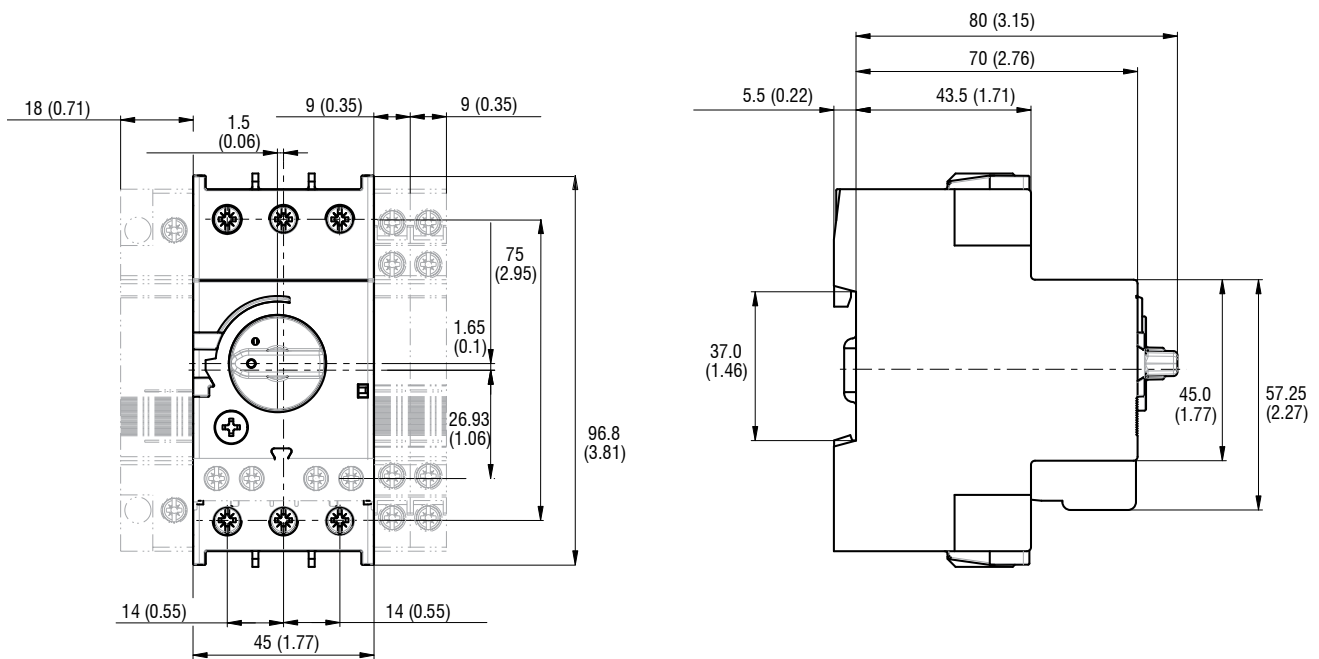

F
 KT5 Manual Motor Controllers

Series KT7 Motor Circuit Controllers

DISCONTINUED


Versatile, convenient
and space saving...
for a variety of
applications

Sprecher+Schuh's KT7 series of Motor Circuit Controllers are some of the most versatile and technologically advanced control products available today.

In one small package, KT7s combine the functions of:

- Current limiting short circuit protection
- Class 10 thermal overload protection
- Switching and
- Signaling

These devices can be used in a wide variety of control schemes that reduce panel space, simplify installation and eliminate the need for more expensive equipment.

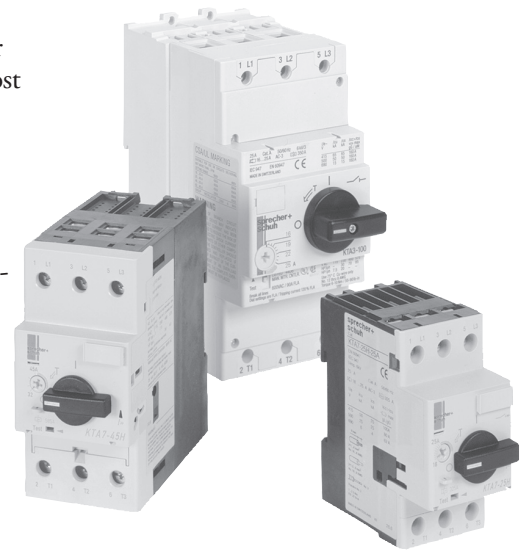

Designed for multiple applications

UL rules allow KT7 Motor Circuit Controllers to be used in a wide variety of applications including:

- Manual Starter Applications
- Traditional Group Motor Applications with compliance to the Tap Conductor Ratings
- Motor Disconnect Applications
- Self-Protected Manual Combination Starter Applications (Type E)
- Individual Combination Starter Applications (Type E/F)
- Multi-motor Starter Combination Applications (Type E/F)

Increased ratings...

Sprecher+Schuh's KT7 controller family offers higher interrupting capacities (KAIC ratings) and improved Type 2 Coordination and Type E (life after short-circuit). The KTA7-25H/32H offers the option of higher short-circuit current ratings (SCCR) than the standard interrupting capacity of the KTA7-25S/32S Motor Controllers. KTA7 is also available in frames up to 45A. KTC7 can be used with High Efficiency motors. KTB7 Magnetic Only controllers can be combined with CA7 contactors and CEP7 overloads to provide additional features. KTV7 series motor controllers are suitable for application at the output of variable frequency drive (VFD) in multi-motor installations.



See our online white paper

Methods of Applying

KT7

Motor Circuit Controllers



45mm
(≈ 1 3/4")

25...32A
Standard Interrupting Capacity



45mm
(≈ 1 3/4")

25...32A
High Interrupting Capacity



54mm
(≈ 2 1/8")

45A
High Interrupting Capacity

Construction Type E Listing


Advanced current limiting and breaking capacity has allowed KT7s to be UL / CSA listed as self-protected (Construction Type E) manual combination motor controllers. This eliminates the need for an upstream fuse or circuit breaker when using the KT7 as a manual motor starter. In addition, KT7s also meet

DISCONTINUED

UL requirements for “at-motor disconnects,” which means they can be used in an enclosure with a lockable handle as a manual motor starter for individual circuits, and are also an approved means of motor disconnect.

Type E + Combo starter + Economy = “Ecombo” starter

When the KT7 self-protected manual combination starter is combined with Sprecher + Schuh’s CA7 contactor to provide remote operation, we now have an alternative to the classic combination starter. We call these “Ecombo” starters, which save significant dollars and panel space over conventional combo starters. Ecombo starters are available for applications up to 45 Amperes (30 HP @ 460V).

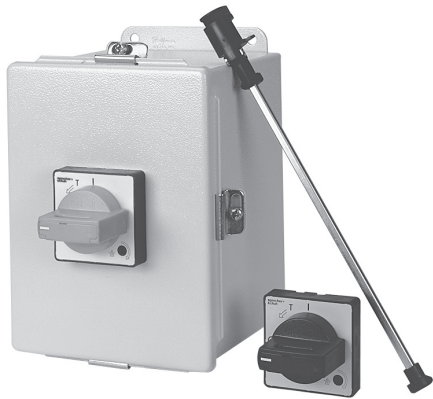


KT7s meet UL requirements for Type E manual motor controllers and “at-motor disconnects”

See a complete explanation of Ecombo starters beginning on page F58 of this catalog.

Multi-motor applications... Popular and money saving

Because of the KT7’s Construction Type E – UL Rating as a self-protected combination starter, many group motor installations can utilize an even simpler design and less expensive equipment. The result is minimum panel size and maximum flexibility while avoiding cumbersome NEC group motor installation rules.

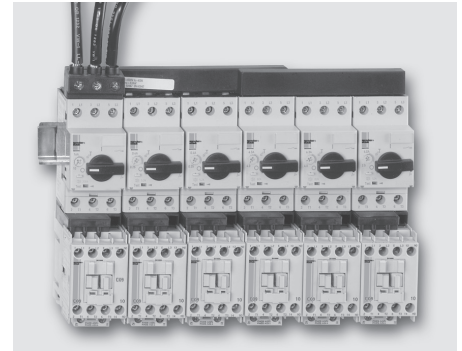

Using KT7s in Multi-Motor Starter applications can replace classic Branch Circuit Protection Devices and reduce panel space up to 60%

Excellent short circuit protection characteristics

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid buildup of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability, KTA Motor Circuit Controllers have a short circuit capacity of up to 65kA at 480Y/277V and up to 47kA at 600Y/347V (see illustration below).

Superb thermal overload protection

Every KT7 device is individually calibrated at the factory for the smallest and largest current it can handle. When coupled with automatic ambient temperature compensation over a range of -25°C to +60°C, very accurate thermal overload protection is obtained. In addition, the KT7 is a Class 10 device... it trips within 10 seconds under locked rotor conditions (6 x FLA). This better protects today’s T-Frame motors.

Only model is available *without* the thermal trip feature for special applications where a separate motor overload is required.



Other protection features

All KT7 Motor Circuit Controllers provide accelerated tripping under single phase conditions. This is accomplished with a special “differential tripping” mechanism built into each device.

Special units for special applications

KTC7 controllers are available with a fixed magnetic trip set at 16...20x the maximum value of the current adjustment range (as opposed to 13x for the KTA7). This prevents nuisance tripping in applications utilizing high efficiency motors for example. The KTB7 Magnetic

Manual Motor Starter Ratings

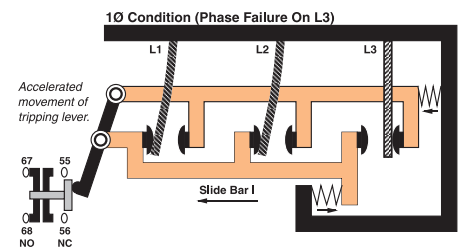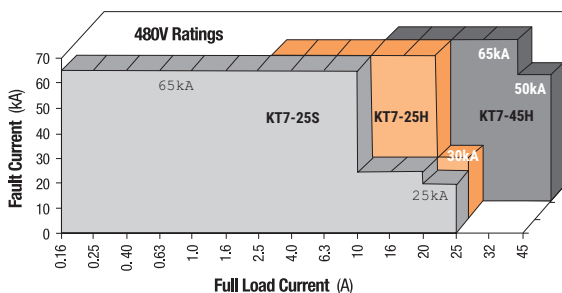

All KT7 Motor Circuit Controllers offer accelerated tripping under single phase conditions

F
KT7 Motor Circuit Controllers

KTA7 Base Unit

| Maximum Horsepower | | | | | | Current Adjustment Range [A] | Magnetic Release Response Current [A] | Catalog Number |
|---|-------|--------------------------|-------|-------|-------|------------------------------|---------------------------------------|-----------------------|
| Typical Single Phase | | Typical Three Phase [HP] | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | |
| KTA7-25...32S — Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25S-6.3A |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25S-10A |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25S-16A |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25S-20A |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25S-25A |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32S-29A |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32S-32A |
| KTA7-25...32H — High Interrupting Capacity | | | | | | | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25H-2.5A |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25H-4A |
| 1/4 | 1/2 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25H-6.3A |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25H-10A |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25H-20A |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25H-25A |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32H-29A |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32H-32A |
| KTA7-45H — High Interrupting Capacity | | | | | | | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A |
| 1 | 3 | 5 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 15 | 14.5...20 | 260 | KTA7-45H-20A |
| 2 | 3 | 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | KTA7-45H-25A |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 23...32 | 416 | KTA7-45H-32A |
| 3 | 7-1/2 | 10 | 15 | 30 | 40 | 32...45 | 585 | KTA7-45H-45A |



Catalog Number KTA7-25S



Catalog Number KTA7-25H



Catalog Number KTA7-45H

F KTT Motor Circuit Controllers

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

KTA7 UL Ratings Application Chart

| Device | Manual Motor Starter | | Manual Controller for Group Installation ❶ | | | Manual Controller as Motor Disconnect ❷❸ | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller ❹❺❻ | |
|---|---------------------------------|------|--|---------------------------------|------|--|------|---------------------------------------|-----------|---|-----------|
| | Max. Short Circuit Current [kA] | | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | 480V | 600V | | 480V | 600V | 480V | 600V | 480Y/277V | 600Y/347V | 480Y/277V | 600Y/347V |
| KTA7-25...32S — Standard Interrupting Capacity | | | | | | | | | | | |
| KTA7-25S-0.16A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-0.25A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-0.4A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-0.63A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-1A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-1.6A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTA7-25S-2.5A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25S-4A | 65 | 25 | 450 | 65 | 25 | 65 | 25 | 65 | 25 | 65 | 25 |
| KTA7-25S-6.3A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA7-25S-10A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA7-25S-16A | 30 | 30 | 450 | 30 | 30 | 30 | 30 | 30 | ~ | 30 | ~ |
| KTA7-25S-20A | 30 | 30 | 450 | 30 | 30 | 10 | 10 | 10 | ~ | 10 | ~ |
| KTA7-25S-25A | 25 | 10 | 450 | 25 | 10 | 10 | 5 | ~ | ~ | ~ | ~ |
| KTA7-32S-29A | 25 | 30 | 450 | 25 | 30 | 10 | ~ | ~ | ~ | ~ | ~ |
| KTA7-32S-32A | 25 | 30 | 450 | 25 | 30 | 10 | ~ | ~ | ~ | ~ | ~ |
| KTA7-25...32H — High Interrupting Capacity | | | | | | | | | | | |
| KTA7-25H-2.5A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25H-4A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25H-6.3A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25H-10A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25H-16A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-25H-20A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTA7-25H-25A | 30 | 30 | 450 | 30 | 30 | 30 | 30 | 30 | ~ | 30 | ~ |
| KTA7-32H-29A | 30 | 30 | 450 | 30 | 30 | 30 | 18 | ~ | ~ | ~ | ~ |
| KTA7-32H-32A | 30 | 30 | 450 | 30 | 30 | 30 | 18 | ~ | ~ | ~ | ~ |
| KTA7-45H — High Interrupting Capacity | | | | | | | | | | | |
| KTA7-45H-10A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-16A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-20A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-25A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-32A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTA7-45H-45A | 65 | 18 | 600 | 65 | 18 | 65 | 18 | 65 | ~ | 65 | ~ |

F KT7 Motor Circuit Controllers

- ❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
- ❷ UL 508 Part III.
- ❸ UL 508 Part IV.
- ❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
- ❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTC7 Base Unit ①

| Maximum Horsepower | | | | | | Current Adjustment Range [A] | Magnetic Release Response Current [A] | Catalog Number |
|--|-------|--------------------------|-------|-------|------|------------------------------|---------------------------------------|-----------------------|
| Typical Single Phase | | Typical Three Phase [HP] | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | |
| KTC7-25S — Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 3.2 | KTC7-25S-0.16A |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 5.2 | KTC7-25S-0.25A |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 8.2 | KTC7-25S-0.4A |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 13 | KTC7-25S-0.63A |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 21 | KTC7-25S-1A |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 33 | KTC7-25S-1.6A |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 52 | KTC7-25S-2.5 |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 82 | KTC7-25S-4A |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 130 | KTC7-25S-6.3A |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 208 | KTC7-25S-10A |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 260 | KTC7-25S-16A |
| KTC7-25H — High Interrupting Capacity | | | | | | | | |
| 1 | 3 | 5 | 5 | 10 | 10 | 10...16 | 260 | KTC7-25H-16A |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 325 | KTC7-25H-20A |
| KTC7-45H — High Interrupting Capacity | | | | | | | | |
| 2 | 3 | 7-1/2 | 10 | 20 | 25 | 18...25 | 416 | KTC7-45H-25A |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 23...32 | 585 | KTC7-45H-32A |



KTC7-25S

Description

The KTC7 has a fixed magnetic trip set at 16...21x the maximum value of the current adjustment range (as opposed to the KTA7s magnetic trip of approximately 13x current adjustment range). KTC7 are typically used in applications where nuisance tripping might occur, as with some high efficiency motors.

F

KTT Motor Circuit Controllers

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTC7-25S-4A.

① Magnetic trip is fixed at 16...21x the maximum value of the current adjustment range.

KTC7 UL Ratings Application Chart

| Device | Manual Motor Starter | | Manual Controller for Group Installation ❶ | | | Manual Controller as Motor Disconnect ❷❸ | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller ❹❺ | |
|--|---------------------------------|------|--|---------------------------------|------|--|------|---------------------------------------|-----------|--|-----------|
| | Max. Short Circuit Current [kA] | | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | 480V | 600V | | 480V | 600V | 480V | 600V | 480Y/277V | 600Y/347V | 480Y/277V | 600Y/347V |
| KTC7-25S — Standard Interrupting Capacity | | | | | | | | | | | |
| KTC7-25S-0.16A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTC7-25S-0.25A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTC7-25S-0.4A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTC7-25S-0.63A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTC7-25S-1A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 47 | 65 | 47 |
| KTC7-25S-1.6A | 65 | 47 | 450 | 65 | 47 | 65 | 47 | 65 | 30 | 65 | 30 |
| KTC7-25S-2.5A | 65 | 25 | 450 | 65 | 25 | 65 | 25 | 65 | 25 | 65 | 25 |
| KTC7-25S-4A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTC7-25S-6.3A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | ~ | 65 | ~ |
| KTC7-25S-10A | 30 | 30 | 450 | 30 | 30 | 30 | 30 | 30 | ~ | 30 | ~ |
| KTC7-25S-16A | 30 | 30 | 450 | 30 | 30 | 10 | 10 | 10 | ~ | 10 | ~ |
| KTC7-25H — High Interrupting Capacity | | | | | | | | | | | |
| KTC7-25H-16A | 65 | 30 | 450 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC7-25H-20A | 30 | 30 | 450 | 30 | 30 | 30 | 30 | 30 | ~ | 30 | ~ |
| KTC7-45H — High Interrupting Capacity | | | | | | | | | | | |
| KTC7-45H-25A | 65 | 30 | 600 | 65 | 30 | 65 | 30 | 65 | 30 | 65 | 30 |
| KTC7-45H-32A | 65 | 30 | 600 | 65 | 18 | 65 | 18 | 65 | 18 | 65 | 18 |

F

KTC7 Motor Circuit Controllers

- ❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
- ❷ UL 508 Part III.
- ❸ UL 508 Part IV.
- ❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
- ❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTB7 UL Ratings Application Chart

| Device | Manual Motor Starter | | Manual Controller for Group Installation ❶ | | | Manual Controller as Motor Disconnect ❷ | |
|---|---------------------------------|------|--|---------------------------------|------|---|------|
| | Max. Short Circuit Current [kA] | | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | 480V | 600V | | 480V | 600V | 480V | 600V |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| KTB7-25S-0.4A | 65 | 47 | 450 | 65 | 47 | 65 | 47 |
| KTB7-25S-1A | 65 | 47 | 450 | 65 | 47 | 65 | 47 |
| KTB7-25S-2.5A | 65 | 30 | 450 | 65 | 30 | 65 | 30 |
| KTA7-25...32H — High Interrupting Capacity | | | | | | | |
| KTB7-25H-2.5A | 65 | 30 | 450 | 65 | 30 | 65 | 30 |
| KTB7-25H-4A | 65 | 30 | 450 | 65 | 30 | 65 | 30 |
| KTB7-25H-10A | 65 | 30 | 450 | 65 | 30 | 65 | 30 |
| KTB7-25H-16A | 65 | 30 | 450 | 65 | 30 | 65 | 30 |
| KTB7-25H-25A | 30 | 30 | 450 | 30 | 30 | 30 | 30 |
| KTB7-32H-32A | 30 | 30 | 450 | 30 | 30 | 30 | 18 |
| KTA7-45H — High Interrupting Capacity | | | | | | | |
| KTB7-45H-25A | 65 | 30 | 600 | 65 | 30 | 65 | 30 |
| KTB7-45H-32A | 65 | 30 | 600 | 65 | 30 | 65 | 30 |
| KTB7-45H-45A | 65 | 18 | 600 | 65 | 18 | 65 | 18 |

F

KT7 Motor Circuit Controllers

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
 ❷ UL 508 Part III.

KTV7 Base Unit

| Rated Operational Current (I _e) [A] | Current Adjustment Range [A] | Nominal Magnetic Trip Current [A] | Maximum Short Circuit Current [kA] | | Maximum Horsepower Typical ①② Three Phase [HP] | | | | Catalog Number |
|--|------------------------------|--------------------------------------|------------------------------------|-----------------------|---|-------|-------|------|----------------|
| | | | 480Y/277V Type E | 480V (group motor) | 200V | 230V | 460V | 575V | |
| KTV7-25H...32H — High Interrupting Capacity | | | | | | | | | |
| 1.6 | 1.0...1.6 | 82 | 65 | 65 | 1/4 | 1/3 | 1 | ~ | KTV7-25H-1.6A |
| 2.5 | 1.6...2.5 | 82 | 65 | 65 | 1/2 | 3/4 | 1-1/2 | ~ | KTV7-25H-2.5A |
| 4.0 | 2.5...4.0 | 82 | 65 | 65 | 1 | 1 | 3 | ~ | KTV7-25H-4A |
| 6.3 | 4.0...6.3 | 82 | 65 | 65 | 1-1/2 | 2 | 5 | ~ | KTV7-25H-6.3A |
| 10 | 6.3...10 | 130 | 65 | 65 | 3 | 3 | 7-1/2 | ~ | KTV7-25H-10A |
| 16 | 10...16 | 208 | 65 | 65 | 5 | 5 | 10 | ~ | KTV7-25H-16A |
| 20 | 14.5...20 | 260 | 65 | 65 | 5 | 7-1/2 | 15 | ~ | KTV7-25H-20A |
| 25 | 18...25 | 325 | 30 | 30 | 7-1/2 | 7-1/2 | 20 | ~ | KTV7-25H-25A |
| 29 | 24...29 | 406 | ~ | 30 | 7-1/2 | 10 | 20 | ~ | KTV7-32H-29A |
| 32 | 27...32 | 448 | ~ | 30 | 7-1/2 | 10 | 25 | ~ | KTV7-32H-32A |



KTV7-25H

F

KTV7 Motor Circuit Controllers

Description

The Sprecher+Schuh KTV7 series motor controllers are suitable for two types of applications under cULus listings:

- (1) as a Manual, Self-protected Motor Controller or
- (2) as a Manual Motor Controller with approval for group installation (and as a motor disconnect)

When UL/CSA listed as a manual, self-protected combination motor controller, the KTV7 provides all of the necessary NEC requirements for protection and control of individual motor branch circuits without additional protective devices (per NEC 430-52C option 6).


When KTV7 devices are applied as manual motor controllers in group installations, then NEC group installation rules state these devices must be applied per the appropriate rules, which require the use of an upstream BCPD-branch circuit protection device (per NEC 430-53C option 2).

The output frequency of the VFD must be limited to 400Hz or less to prevent thermal degradation. Various models of the KTV7 series self-protected combination motor controllers provide disconnection for motor branch circuits, branch-circuit and short-circuit protection (including magnetic protection), overload/thermal protection and manual switching.

The KTV7 self-protected combination motor controllers are current limiting and have a fixed magnetic trip. Interrupt ratings at 400V and 480V are available up to 65kAIC. The VFD output pulse-width modulation frequency must be limited to 4 kilohertz or less. The circuit breakers provide motor overload protection with a trip class 10 characteristic.

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTV7-25H-4A.

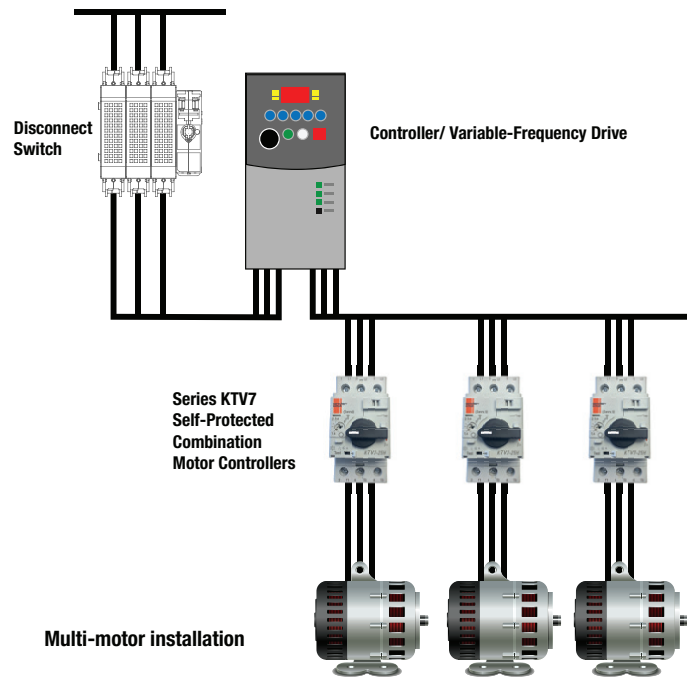















① HP ratings shown are for reference. Final selection of MPCB is determined by actual motor full load current.
 ② Not applicable at 575V.

KTV7 UL Ratings Application Chart


| Device | Manual Controller for Group Installation ❶ | | Manual Controller as Motor Disconnect ❷❸ | | Suitable for Tap Conductor Protection | | Self-Protected Type E Manual Combination Controller ❹❺ | | |
|--|--|---------------------------------|--|---------------------------------|---------------------------------------|---------------------------------|--|---------------------------------|-----------|
| | Max. Fuse or Circuit Breaker | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | | Max. Short Circuit Current [kA] | |
| | | 480V | 600V | 480V | 600V | 480Y/277V | 600Y/347V | 480Y/277V | 600Y/347V |
| KTV7-25H...32H — High Interrupting Capacity | | | | | | | | | |
| KTV7-25H-1.6A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-2.5A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-4A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-6.3A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-10A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-16A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-20A | 450 | 65 | ~ | 65 | ~ | 65 | ~ | 65 | ~ |
| KTV7-25H-25A | 450 | 30 | ~ | 30 | ~ | 30 | ~ | 30 | ~ |
| KTV7-32H-29A | 450 | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ |
| KTV7-32H-32A | 450 | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ |

- ❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
- ❷ UL 508 Part III.
- ❸ UL 508 Part IV.
- ❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
- ❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

Accessories for KT7










| Accessory | Description | Operator Position ❶ | | | Type | Connection Diagram and Terminal Markings ❷ | For Use With | Catalog Number |
|---|---|---|---|---|------|--|-----------------------------------|-------------------|
| | | OFF | ON | Tripped | | | | |
|  | |  |  |  | 1 NO |  | KTA7/CTB7/ KTC7/KTV7 KTU7 ❸ | KT7-PE1-10 |
| | | X | 0 | X | 1 NC |  | KTA7/CTB7/ KTC7/KTV7 KTU7 ❸ | KT7-PE1-01 |
|  | Front-Mounted Auxiliary Contact <ul style="list-style-type: none"> • 1-pole or 2-pole • No additional space required • 300V max. | 0 | X | 0 | 1 NO |  | KTA7/CTB7/ KTC7/KTV7 KTU7 ❸ | KT7-PE1-11 |
| | | X | 0 | X | 1 NC | | | |
| | | 0 | X | 0 | 1 NO |  | KTA7/CTB7/ KTC7/KTV7 KTU7 ❸ | KT7-PE1-20 |
| | | 0 | X | 0 | 1 NO | | | |
| | | X | 0 | X | 1 NC |  | KTA7/CTB7/ KTC7/KTV7 KTU7 ❸ | KT7-PE1-02 |
| | | X | 0 | X | 1 NC | | | |
|  | Right Side-Mounted Auxiliary Contact <ul style="list-style-type: none"> • 2-pole • Adds 9 mm to the width of the device • 600V max. | 0 | X | 0 | 1 NO |  | KTA7 CTB7 KTC7 KTV7 | KT7-PA1-20 |
| | | 0 | X | 0 | 1 NO | | | |
| | | X | 0 | X | 1 NC |  | KTA7 CTB7 KTC7 KTV7 | KT7-PA1-02 |
| | | X | 0 | X | 1 NC | | | |
| | | 0 | X | 0 | 1 NO |  | KTA7 CTB7 KTC7 KTV7 | KT7-PA1-11 |
| | | X | 0 | X | 1 NC | | | |

❶ X=Contact Closed
0=Contact Open




❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.

Accessories for KT7

| Accessory | Description | Operator Position ❶ | | | Type | Connection Diagram and Terminal Markings ❷ | For Use With | Catalog Number |
|--|---|---------------------|----|---------|------------------------------------|--|---|------------------|
| | | OFF | ON | Tripped | | | | |
|  | Front-Mounted Trip Contact <ul style="list-style-type: none"> • 2-pole • Indicates tripping of device • No additional space required • 300V max. | 0 | X | 0 | 1 NO |  | KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸ | KT7-PEF1-S10-N10 |
| | | 0 | 0 | X | NO Trip (Short-Circuit & Overload) | | | |
| | | X | 0 | X | 1 NC |  | KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸ | KT7-PEF1-S10-N01 |
| | | 0 | 0 | X | NO Trip (Short-Circuit & Overload) | | | |
|  | Right Side-Mounted Trip Contact <ul style="list-style-type: none"> • 2-pole • Indicates tripping of motor protector • Adds 9 mm to the width of the device • 600V max. | 0 | 0 | X | NO Trip (Short-Circuit & Overload) |  | KTA7 KTB7 KTC7 KTV7 | KT7-PAF1-S10-M10 |
| | | 0 | 0 | X | NO Trip (Short-Circuit) | | | |
| | | 0 | 0 | X | NO Trip (Short-Circuit & Overload) |  | KTA7 KTB7 KTC7 KTV7 | KT7-PAF1-S10-M01 |
| | | X | X | 0 | NC Trip (Short-Circuit) | | | |
| | | X | X | 0 | NC Trip (Short-Circuit & Overload) |  | KTA7 KTB7 KTC7 KTV7 | KT7-PAF1-S01/M10 |
| | | 0 | 0 | X | NO Trip (Short-Circuit) | | | |
| | | X | X | 0 | NC Trip (Short-Circuit & Overload) |  | KTA7 KTB7 KTC7 KTV7 | KT7-PAF1-S01-M01 |
| | | X | X | 0 | NC Trip (Short-Circuit) | | | |
| | | 0 | 0 | X | NO Trip (Short-Circuit) |  | KTA7 KTB7 KTC7 KTV7 | KT7-PAF1-M11 |
| | | X | X | 0 | NC Trip (Short-Circuit) | | | |


❶ X=Contact Closed
O=Contact Open



❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.


DISCONTINUED

Accessories for KT7


| Accessory | Description | For Use With | AC Coil Voltage | | Catalog Number | | | |
|---|--|------------------------------|--|------------|-----------------|--------------|------------|--------------|
| | | | 50 HZ | 60 HZ | Shunt Trip | Undervoltage | | |
|  | Undervoltage Trip <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm to the width of the KT7 device • Automatically trips motor protector when voltage falls below 35...70% | KTA7 KTB7 KTC7 KTV7 | 12V | 14V | KT7-AA-14V | KT7-UA-14V | | |
| | | | 21V | 24V | KT7-AA-24V | KT7-UA-24V | | |
| | | | 24V | 28V | KT7-AA-28V | KT7-UA-28V | | |
| | | | 42V | 48V | KT7-AA-48V | KT7-UA-48V | | |
| | | | 110V | 120V | KT7-AA-120V | KT7-UA-120V | | |
| | | | 110V | 127V | KT7-AA-127V | KT7-UA-127V | | |
| | | | 220...230V | | KT7-AA-230V | KT7-UA-230V | | |
| | | | | 240...260V | KT7-AA-240V | KT7-UA-240V | | |
| | | | 240V | 277V | KT7-AA-277V | KT7-UA-277V | | |
| | | | 380V | 460V | KT7-AA-460V | KT7-UA-460V | | |
| | | | 415V | 480V | KT7-AA-480V | KT7-UA-480V | | |
| | | | 525V | 600V | KT7-AA-600V | KT7-UA-600V | | |
| | | | Shunt Trip <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm to the width of the KT7 device • Trips motor protector when voltage is applied remotely | KTU7 | DC Coil Voltage | | Shunt Trip | Undervoltage |
| | | | | | 9V DC | | KT7-AA-9D | KT7-UA-9D |
| | 12V DC | | | | KT7-AA-12D | KT7-UA-12D | | |
| | 24V DC | | | | KT7-AA-24D | KT7-UA-24D | | |
| | 36V DC | | | | KT7-AA-36D | KT7-UA-36D | | |
| | 48V DC | | | | KT7-AA-48D | KT7-UA-48D | | |
| | 60V DC | | KT7-AA-60D | KT7-UA-60D | | | | |
| | 64V DC | | KT7-AA-64D | KT7-UA-64D | | | | |
| 72V DC | | KT7-AA-72D | KT7-UA-72D | | | | | |
| 80V DC | | KT7-AA-80D | KT7-UA-80D | | | | | |

F KT7 Motor Circuit Controllers

Undervoltage Trip Connection Diagram





Shunt Trip Connection Diagram





① For Overload (thermal) Trip of KT7.
 ② For Short-Circuit (magnetic) Trip of KT7.



Classic Handle Assembly, Type 1/4/4X/12

| Accessory | Description | Color | Legend ② | For use with... | Frame Size (Length) | Catalog Number |
|---|--|------------|---------------------------|---------------------------------|---------------------|----------------|
|  | Classic Door Coupling Handle ①②③ <ul style="list-style-type: none"> For 3 padlocks 4...8 mm (5/16") diameter Type 1/3/3R/4/4X/12 and IP66 Interlock override capability Can be modified for locking in ON position Ships with coupling — order extension shaft and legend plate separately See Technical Section for mounting depth information | Gray/Black | 0 - I OFF - ON Trip | KTA7, KTB7, KTC7, KTV7 ①② | 65 x 65mm | KT7-HTN |
| | | Red/Yellow | 0 - I OFF - ON Trip | | KTU7 ③ | 65 x 65mm |
|  | Extension Shaft ① <ul style="list-style-type: none"> Cut to required length for mounting depth (adapter-door) See Technical Section for mounting depth information | | | KT7-HTN KT7-HTRY | 250 mm | KT7-HT |
| | | 400 mm | KT7-HTL | | | |

Contemporary Handle Assembly, Type 3R/3/4/4X

| Accessory | Description | Color | Legend ② | For use with... | Frame Size (Length) | Catalog Number |
|---|---|-------------|---------------------------|--------------------------------------|---------------------|----------------|
|  | Contemporary Door Coupling Handle ④ <ul style="list-style-type: none"> Screw Fixing Type 3R, 3, 12, 4, 4X, IP66 Field configurable for defeatable or non-defeatable Ships with coupling — order extension shaft and legend plate separately Requires 30mm hole for mounting For up to 2 padlocks | Black/Black | 0 - I OFF - ON Trip | KTA7 KTB7 KTC7 KTV7 KTU7 | 48.7 x 47mm | KT7-SB |
| | | Red/Yellow | 0 - I OFF - ON Trip | | 48.7 x 47mm | KT7-SY |
|  | Extension Shaft <ul style="list-style-type: none"> Cut to required length for mounting depth (adapter-door) See Technical Section for mounting depth information | | | KT7-SB KT7-SY | 305mm (12") | KT7-S1 |
| | | 533mm (21") | KT7-S2 | | | |

Handle Accessories

| Accessory | Description | For use with... | Catalog Number |
|---|--|-----------------------------|-------------------------|
|  | Extension Shaft Support ⑤ <ul style="list-style-type: none"> Provides consistent alignment of the KT7 shafts with handle or door coupling Recommended for shaft lengths >200mm (7.8 in) 9mm in width and snaps on right side of KT_7 devices Allows for one side-mount auxiliary | KT7-HT_ KT7-S_ KT7-N_ | KT7-SHS |
|  | Legend Plate <ul style="list-style-type: none"> Marking: "Hauptschalter" and "Main Switch" (Black/Gray) Marking: "Not-Aus" and "Emergency Off" (Black/Yellow) | KT7-HT_ KT7-S_ | KT7-HTFCN KT7-HTFCRY |

① See Dimensions and Technical data in this section for design compatibility.

② KTA7, KTB7 and KTC7 can be used with Series D or later KT7-H_ Handle mechanism with "I-O" markings or Series E with "ON-OFF" markings.

③ KTU7 requires Series E or later to comply with UL489 "ON-OFF" Trip





markings.

④ See page F41 for assembly example and dimensions.

⑤ See page F42 for KT7-S_ handle dimensions.

DISCONTINUED

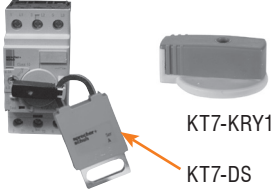


Accessories for KT_7

| Accessory | Description | Color | For Use With | Catalog Number |
|--|--|------------|-------------------------------|----------------|
|  <p>KT7-KRY1 KT7-DS</p> | Lockable Twist Knob <ul style="list-style-type: none"> For 1 padlock 4...5 mm (1/4") dia. shackle Can be locked in OFF position | Black | KTA7, KTB7, KTC7, KTV7, KTU7 | KT7-KN1 |
| | | Red/Yellow | | KT7-KRY1 |
| | Locking Tag <ul style="list-style-type: none"> Padlock attachment to the lockable handles Up to three padlocks 4...8 mm (5/16") shackle | Red | KT7-KN1, KT7-KRY1, KT7-45-KRY | KT7-DS |
|  | Terminal Adapter for Type E Applications ❶ <ul style="list-style-type: none"> Required on all KT7s used in UL Type E applications May not be used with Bus Bars | | KTA/B/C7/V7-25/32 | KT7-25-TE1 |
| | | | KTA/B/C7-45 | KT7-45-TE |
|  | Anti-Tamper Shield <ul style="list-style-type: none"> Provides protection against inadvertent adjustment of the current setting 10 pieces per package | | KTA7, KTB7, KTC7, KTV7 | KT7-25-CA |
|  | Screw Adaptor <ul style="list-style-type: none"> For screw fixing of KT7 Motor Circuit Controller 10 pieces per package | | KTA7, KTB7, KTC7, KTV7, KTU7 | KT7-45-AS |

F

KT7 Motor Circuit Controllers


Marking Systems

| Component | Description | Pkg. Qty. | Catalog Number |
|---|---|-----------|----------------|
|  | Label Sheet - 1 sheet with 105 self-adhesive paper labels each, 6 x 17mm | 1 | CA7-FMS |
|  | Marking Tag Sheet - 1 sheet with 160 perforated paper labels each, 6 x 17mm. To be used with transparent cover | 1 | CA7-FMP |
| | Transparent Cover - To be used with Marking Tag Sheets | 100 ❷ | CA7-FMC |
|  | Tag Carrier - For marking with marker cards and tags. See page N6 for complete listing of available cards and tabs. | 100 ❷ | CA7-FMA2 |


❶ Terminal Adaptors are supplied as standard on enclosed KT7 and CX7 starters, as well as, CL8, CL7 and CK7 assembled products, assuring they can be used in Type E applications. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.

❷ Minimum quantity is one package of 100.





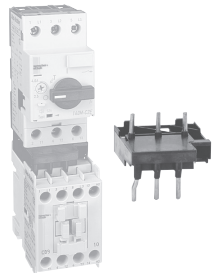Connecting Modules (for connecting KTA7, KTB7 or KTC7 to CA8, CA7 AC coil, or CA7 Electronic DC coil contactors) ②

| Module | Description | For Connecting. . . | To Contactor. . . | Catalog Number ① |
|---|---|----------------------|------------------------------|----------------------|
|  | Connecting Modules (forms Ecombo Starter) - ① <ul style="list-style-type: none"> Provides electrical and mechanical interconnection of KT7 and CA8 (with AC or DC coils), CA7 (with AC coils) or CA7-_E (with Electronic DC coils). Suitable for reversing and wye-delta kits Ecombo starter (with KT7-25/32) mounts on a single DIN-rail (KT7 mounts on DIN-rail) Ecombo starter (with KT7-45) can be mounted on two DIN-rails or on Mounting Modules (see selection table below) Contactor coil mounted on load side | KT_7-25S..32S or KF7 | CA8-9...12 12A max. | KT7-25S-PEK12 |
| | | KT_7-25S..32S or KF7 | CA7-9...23 CA7-9E...23E | KT7-25S-PEC23 |
| | | KT_7-25H..32H | CA7-9...23 CA7-9E...23E | KT7-25H-PEC23 |
| | | KT_7-25H..32H | CA7-30...37 CA7-30E...37E | KT7-25H-PNC37 |
| | | KT_7-45H | CA7-30...37 CA7-30E...37E | KT7-45H-PNC37 |
| | | KT_7-45H | CA7-43 CA7-43E | KT7-45H-PNC43 |

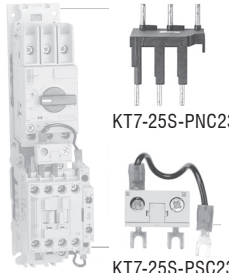Connecting Modules (for connecting KTA7, KTB7 or KTC7 to CA7 to make CLT7 type assemblies) ②

| Module | Description | For Connecting... | To Contactor. . . | Use Contactor. . . ① | With Coil Module. . . |
|--|--|----------------------|-------------------|----------------------|-----------------------|
|  | Connecting Modules <ul style="list-style-type: none"> Provides electrical interconnection of KT7 and CA7 contactors Contactor Coil Module extends A1/A2 Line Side terminals forward to facilitate wiring Contactor and motor protector must be mounted on two DIN-rails or on Mounting Module (see selection table below) | KT_7-25S..32S or KF7 | CA7-9..23 | KT7-25S-PNC23 | KT7-25S-PSC23 |
| | | KT_7-25H..32H | | KT7-25H-PNC23 | |
| | | KT_7-25H..32H | CA7-30..37 | KT7-25H-PNC37 | KT7-45H-PSC43 |
| | | KT_7-45H | | KT7-45H-PNC37 | |
| | | KT_7-45H | | KT7-45H-PNC43 | |

Type W Mounting Modules

| Module | Description | Width (mm) | Catalog Number |
|---|--|------------|----------------|
|  | Short Mounting Module - Requires Connecting Module from tables above <ul style="list-style-type: none"> Provides support for KT7 + CA7 or CA8 Top rail is specifically designed for KT7 Bottom rail is movable for easy assembly and disassembly Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts 228 mm long | 45 | W-32489 |
| | | 54 | W-32490 |
|  | Long Mounting Module - See Section D for Connecting Modules <ul style="list-style-type: none"> Provides support for KT7 + PCS Softstarter, CA7 + PCS Softstarter or KTB7 + CA7+CEP7 Top rail is specifically designed for KT7 Bottom rail is movable for easy assembly and disassembly Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts 283 mm long | 45 | W-32496 |
| | | 54 | W-32497 |
|  | Spacer for Mounting Module - Fits between 45mm and 54mm for Reversing applications (228 mm long) | 9 | W-32955 |
|  | Dovetail Joints - Used to connect two mounting modules together. (Sold in packages of 50) | | W-32954 |

① cURus Approved (File # E33916).
 ② Not for use with KTU7 Circuit Breakers



DISCONTINUED


Compact Busbar System for KTA7, KTB7 and KTC7 Motor Controllers ①②④

| Accessory | Description | For Use With | Catalog Number |
|-------------------------------|--|---|--|
| | Compact Busbar — 45 mm Spacing (Rated 64 A) <ul style="list-style-type: none"> For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers | KT_7-25...32S KT_7-25...32H ③ | KT7-32-DB-45-2 KT7-32-DB-45-3 KT7-32-DB-45-4 KT7-32-DB-45-5 |
| | Compact Busbar — 54 mm Spacing (Rated 64 A) <ul style="list-style-type: none"> For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers | KT_7-25...32S KT_7-25...32H ③ | KT7-32-DB-54-2 KT7-32-DB-54-3 KT7-32-DB-54-4 KT7-32-DB-54-5 |
| | Compact Busbar — 54mm Spacing (Rated 120 A) <ul style="list-style-type: none"> For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers | KT_7-45H | KT7-45-DB-54-2 KT7-45-DB-54-3 KT7-45-DB-54-4 |
| | Compact Busbar — 63 mm Spacing (Rated 120 A) <ul style="list-style-type: none"> For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers | KT_7-45H | KT7-45-DB-63-2 KT7-45-DB-63-3 KT7-45-DB-63-4 |
| KTA7-25S to 25H KBH2 | Spacer for KT_7-25...32H to KT_7-25...32S <ul style="list-style-type: none"> Accommodates difference in depth from KT_7-25H...32H to KT_7-25S...32S Aligns terminals for compact bus bar connection | KT_7-25...32S to KT_7-25...32H ③ | KBH2 |
| A2E A3E | Supply Block and Terminal <ul style="list-style-type: none"> For power connection to Compact Busbar — 600V, KT_7-25/32...63A max. / KT_7-45...120A maximum Top feed — overlaps commoning link Meets requirements for terminal spacing from source in Type E applications KT7-25-A2E and KT7-45-A2E are primarily used for bottom cable feed | KT_7-25...32S or KT_7-25...32H ③ | KT7-25-A2E KT7-32-A3E |
| | | KT_7-45H | KT7-45-A2E KT7-45-A3E |
| | Terminal Cover <ul style="list-style-type: none"> For covering of unused connection terminals IP2X finger protection | KT_7-25...32 KT_7-45H | KT7-32-DBA KT7-45-DBA |

- ① UL Approved (File #E33916); CSA Approved (File #13908).
- ② Compact busbar may not be applied with KT7-25-TE1 or KT7-45-TE Terminal Adaptors. Either Terminal Adaptors or Bus Bar may be used, not both.
- ③ KT7-25...32S and KT7-25...32H may not be combined without KBH2.
- ④ Not for use with KTU7 Circuit Breakers

KF7 Fuse Holder to be used with KT7 or CA8/CA7 ⑤

| Accessory | Description | Approvals | | Catalog Number |
|--|--|-----------|--------|---------------------|
| | | IEC/CE | UL/CSA | |
|  | KF7 Fuse Holder, CC - 30A | Yes | Yes | KF7-D3C-C30 |
|  Blown Fuse Indicator | KF7 Fuse Holder with Blown Fuse Indication, CC - 30A | Yes | Yes | KF7-D3C-C30L |

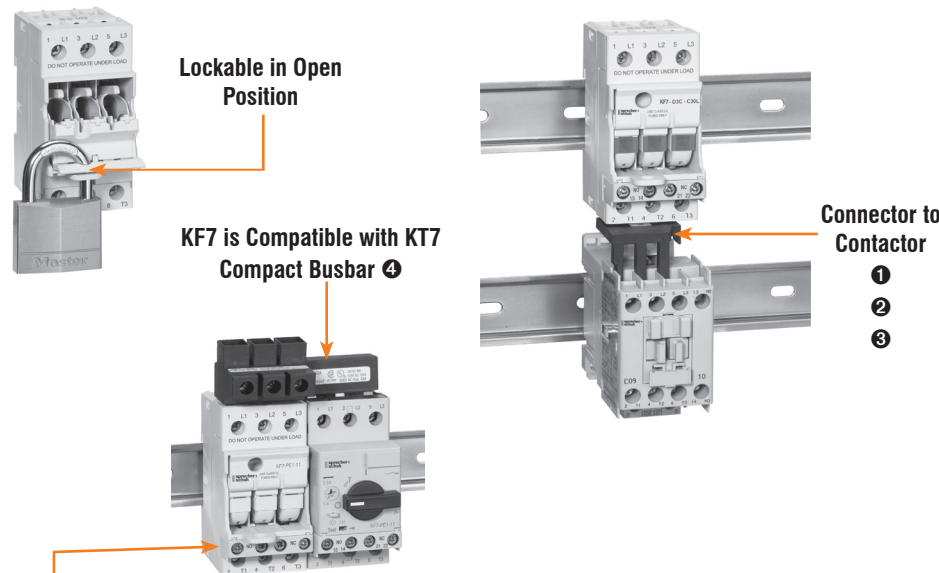



Applying KF7 with KTA7 Motor Circuit Controllers and CA7 Contactors

KF7 can be applied on the line side of a multiple small KTA7 motor circuit controller or a single KTA7 controller and CA7 contactors to increase the short-circuit protection of the group or a single branch circuit. KF7 is compatible with the KT7 compact bus bars (as shown in Section F), which reduces the space requirement as well as installation time.

Applying KF7 with CA7 Contactors

KF7 can be applied on the line side of CA7 contactors to increase the short-circuit withstand rating. The cUL withstand rating of CA7 when protected by Type "CC" fuses is increased to 100KAIC as shown on page A72.

| Accessory | Connection Diagram | Description | Catalog Number |
|---|---|---|-------------------|
|  |  | <p>Auxiliary Contact for KF7 Fuse Holder (1 NO Late Make + NC Early Break)</p> <ul style="list-style-type: none"> • NO Late Make, provides positive indication that power circuit is open • NC Early Break, provides capability for dropping out contactor before breaking current on fuse | KF7-PE1-11 |

- ① The KF7 terminal spacing and height are the same as KT_7-25S. Reference page F17 tables to select a connector.
- ② If using a KT7-25S-PEK12 (with CA8) or KT7-25S-PEC23 (with CA7), close couple connector, then the pair mounts on a single DIN rail under the KF7.
- ③ Using a KT7-25S-PNC23 to mount a KF7 with a standard CA7 with AC Coil requires two DIN rails.
The A1-A2 terminals of a standard CA7 with AC Coil can be turned to the load side. In this case a KT7-25S-PSC23 would not be required.
- ④ KF7 can not be mounted directly to a KT_7 using a PEK, PEC or PNC Connector. KF7, used in connection with a Compact Bus Bar, can provide Group Fusing protection for multiple bus bar connected KT_7.
- ⑤ For dimensions and wiring diagrams see page F44.

F
KT7 Motor Circuit Controllers

IEC Performance Data

| | | Catalog Number KTA7-25S...32S | | | | | | | | | | | | | | |
|--|------|-------------------------------|-------|------|-------|------|------|------|------|------|-----|-----|-----|-----|------|-----|
| | | 0.16A | 0.25A | 0.4A | 0.63A | 1A | 1.6A | 2.5A | 4A | 6.3A | 10A | 16A | 20A | 25A | 29A | 32A |
| Rated Operational Current, I_e | [A] | 0.16 | 0.25 | 0.4 | 0.63 | 1 | 1.6 | 2.5 | 4 | 6.3 | 10 | 16 | 20 | 25 | 29 | 32 |
| Magnetic Release Current | [A] | 2.1 | 3.3 | 5.2 | 8.2 | 13 | 21 | 33 | 52 | 82 | 130 | 208 | 260 | 325 | 406 | 448 |
| Switching of Standard Three-Phase Motors | | | | | | | | | | | | | | | | |
| AC-2, AC-3 | | | | | | | | | | | | | | | | |
| 230/240V | [kW] | ~ | ~ | 0.06 | 0.09 | 0.18 | 0.25 | 0.37 | 0.75 | 1.5 | 2.2 | 4.0 | 5.5 | 5.5 | 7.5 | 7.5 |
| 400/415V | [kW] | 0.02 | 0.04 | 0.09 | 0.18 | 0.25 | 0.55 | 0.75 | 1.5 | 2.2 | 4.0 | 7.5 | 10 | 11 | 13 | 15 |
| 500V | [kW] | 0.06 | 0.09 | 0.12 | 0.18 | 0.37 | 0.75 | 1.1 | 2.2 | 3.0 | 6.3 | 10 | 11 | 15 | 18.5 | 20 |
| 690V | [kW] | 0.06 | 0.09 | 0.18 | 0.25 | 0.55 | 1.1 | 1.8 | 3.0 | 4.0 | 7.5 | 13 | 17 | 22 | 25 | 25 |
| Back-up Fuses | | | | | | | | | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | | | | | | | | | |
| 230/240V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 100 | 100 | 125 | 125 |
| 400/415V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 100 | 100 | 125 | 125 |
| 440/460V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 63 | 63 | 80 | 80 | 100 | 100 |
| 500V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 80 | 80 | 80 | 100 | 100 |
| 690V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 16 | 20 | 35 | 50 | 50 | 63 | 63 | 63 | 80 | 80 |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | | | | | | | | | |
| I_{cu} | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 65 | 50 | 50 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 50 | 15 | 15 | 15 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 10 | 6 | 6 | 6 | 6 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 10 | 6 | 6 | 6 | 6 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 8 | 6 | 6 | 4 | 4 | 3 | 3 | 3 | 3 | 3 |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | | | | | | | | | |
| I_{cs} | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 50 | 25 | 25 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 15 | 15 | 15 | 15 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 6 | 6 | 6 | 6 | 6 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 6 | 6 | 6 | 6 | 6 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 8 | 6 | 6 | 4 | 4 | 3 | 3 | 3 | 3 | 3 |

⓪ No backup fuse required.

IEC Performance Data

| | | Catalog Number KTA7-25H...32H | | | | | | | | Catalog Number KTA7-45H... | | | | | | |
|--|------|-------------------------------|------|------|-----|-----|-----|-----|------|----------------------------|-----|-----|-----|-----|-----|-----|
| | | 2.5A | 4A | 6.3A | 10A | 16A | 20A | 25A | 29A | 32A | 10A | 16A | 20A | 25A | 32A | 45A |
| Rated Operational Current, I_e | [A] | 2.5 | 4 | 6.3 | 10 | 16 | 20 | 25 | 29 | 32 | 10 | 16 | 20 | 25 | 32 | 45 |
| Magnetic Release Current | [A] | 33 | 52 | 82 | 130 | 208 | 260 | 325 | 406 | 448 | 130 | 208 | 260 | 325 | 416 | 585 |
| Switching of Standard Three-Phase Motors | | | | | | | | | | | | | | | | |
| AC-2, AC-3 | | | | | | | | | | | | | | | | |
| 230/240V | [kW] | 0.37 | 0.75 | 1.5 | 2.2 | 4.0 | 5.5 | 5.5 | 7.5 | 7.5 | 2.2 | 4.0 | 5.5 | 6.3 | 7.5 | 13 |
| 400/415V | [kW] | 0.75 | 1.5 | 2.2 | 4.0 | 7.5 | 10 | 11 | 13 | 15 | 4.0 | 7.5 | 10 | 11 | 15 | 22 |
| 500V | [kW] | 1.1 | 2.2 | 3.0 | 6.3 | 10 | 11 | 15 | 18.5 | 20 | 6.3 | 10 | 11 | 15 | 20 | 30 |
| 690V | [kW] | 1.8 | 3.0 | 4.0 | 7.5 | 13 | 17 | 22 | 25 | 25 | 7.5 | 13 | 17 | 22 | 30 | 40 |
| Back-up Fuses | | | | | | | | | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | | | | | | | | | |
| 230/240V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ |
| 400/415V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 100 | 100 | 125 | 125 | 80 | 100 | 100 | 100 | 125 | 125 |
| 440/460V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 100 | 100 | 125 | 125 | 80 | 100 | 100 | 100 | 125 | 125 |
| 500V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 80 | 80 | 100 | 100 | 80 | 100 | 100 | 100 | 125 | 125 |
| 690V | [A] | 20 | 35 | 50 | 50 | 63 | 63 | 63 | 80 | 80 | 63 | 80 | 80 | 80 | 100 | 100 |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | | | | | | | | | |
| I_{cu} | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 65 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 50 | 50 | 100 | 100 | 100 | 65 | 65 | 65 |
| 440/460V | [kA] | 100 | 100 | 100 | 50 | 50 | 50 | 50 | 25 | 25 | 65 | 65 | 65 | 65 | 65 | 50 |
| 500V | [kA] | 100 | 100 | 100 | 50 | 50 | 50 | 50 | 25 | 25 | 50 | 50 | 50 | 50 | 50 | 50 |
| 690V | [kA] | 10 | 10 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 10 | 10 | 10 | 10 | 10 | 10 |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | | | | | | | | | |
| I_{cs} | | | | | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 50 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 50 | 25 | 25 | 25 | 25 | 50 | 50 | 50 | 50 | 50 | 50 |
| 440/460V | [kA] | 100 | 100 | 100 | 50 | 50 | 25 | 25 | 20 | 20 | 50 | 50 | 50 | 50 | 50 | 50 |
| 500V | [kA] | 100 | 100 | 100 | 50 | 50 | 25 | 25 | 20 | 20 | 50 | 50 | 50 | 50 | 50 | 50 |
| 690V | [kA] | 10 | 10 | 6 | 6 | 4 | 4 | 4 | 4 | 4 | 10 | 10 | 10 | 10 | 6 | 6 |

⓪ No backup fuse required.

IEC Performance Data

| | | Catalog Number KTB7-25S... | | | | | | |
|--|------|----------------------------|-------|------|-------|------|------|------|
| | | 0.16A | 0.25A | 0.4A | 0.63A | 1A | 1.6A | 2.5A |
| Rated Operational Current, I_e | [A] | 0.16 | 0.25 | 0.4 | 0.63 | 1 | 1.6 | 2.5 |
| Magnetic Release Current | [A] | 2.1 | 3.3 | 5.2 | 8.2 | 13 | 21 | 32 |
| Switching of Standard Three-Phase Motors | | | | | | | | |
| AC-2, AC-3 | | | | | | | | |
| 230/240V | [kW] | ~ | ~ | 0.06 | 0.09 | 0.18 | 0.25 | 0.37 |
| 400/415V | [kW] | 0.02 | 0.04 | 0.09 | 0.18 | 0.25 | 0.55 | 0.75 |
| 500V | [kW] | 0.06 | 0.09 | 0.12 | 0.18 | 0.37 | 0.75 | 1.1 |
| 690V | [kW] | 0.06 | 0.09 | 0.18 | 0.25 | 0.55 | 1.1 | 1.8 |
| Back-up Fuses | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | |
| 230/240V | [A] | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ |
| 400/415V | [A] | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ |
| 440/460V | [A] | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ |
| 500V | [A] | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ |
| 690V | [A] | ⓘ | ⓘ | ⓘ | ⓘ | ⓘ | 16 | 20 |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | |
| I_{cu} | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 10 | 6 |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | |
| I_{cs} | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 8 | 6 |

ⓘ No backup fuse required.

IEC Performance Data

| | | Catalog Number KTB7-25H...32H | | | | | | | Catalog No. KTB7-45H... | | |
|--|------|-------------------------------|------|------|-----|-----|-----|-----|-------------------------|-----|-----|
| | | 2.5A | 4A | 6.3A | 10A | 16A | 25A | 32A | 25A | 32A | 45A |
| Rated Operational Current, I_e | [A] | 2.5 | 4 | 6.3 | 10 | 16 | 25 | 32 | 25 | 32 | 45 |
| Magnetic Release Current | [A] | 32 | 52 | 82 | 130 | 208 | 325 | 448 | 325 | 416 | 585 |
| Switching of Standard Three-Phase Motors | | | | | | | | | | | |
| AC-2, AC-3 | | | | | | | | | | | |
| 230/240V | [kW] | 0.37 | 0.75 | 1.5 | 2.2 | 4.0 | 5.5 | 7.5 | 6.3 | 7.5 | 13 |
| 400/415V | [kW] | 0.75 | 1.5 | 2.2 | 4.0 | 7.5 | 11 | 15 | 11 | 15 | 22 |
| 500V | [kW] | 1.1 | 2.2 | 3.0 | 6.3 | 10 | 15 | 20 | 15 | 20 | 30 |
| 690V | [kW] | 1.8 | 3.0 | 4.0 | 7.5 | 13 | 22 | 25 | 22 | 25 | 40 |
| Back-up Fuses | | | | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | | | | |
| 230/240V | [A] | ① | ① | ① | ① | ① | ① | ① | 100 | 125 | 125 |
| 400/415V | [A] | ① | ① | ① | ① | ① | 100 | 125 | 100 | 125 | 125 |
| 440/460V | [A] | ① | ① | ① | ① | 80 | 100 | 125 | 100 | 125 | 125 |
| 500V | [A] | ① | ① | ① | ① | 80 | 80 | 100 | 100 | 125 | 125 |
| 690V | [A] | 20 | 35 | 50 | 50 | 63 | 63 | 80 | 80 | 100 | 100 |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | | | | |
| I_{cu} | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 65 | 50 | 100 | 65 | 65 |
| 440/460V | [kA] | 100 | 100 | 100 | 50 | 50 | 50 | 25 | 65 | 65 | 50 |
| 500V | [kA] | 100 | 100 | 100 | 50 | 50 | 25 | 25 | 50 | 50 | 50 |
| 690V | [kA] | 10 | 6 | 10 | 6 | 6 | 6 | 6 | 10 | 10 | 10 |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | | | | |
| I_{cs} | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 50 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 50 | 25 | 25 | 50 | 50 | 50 |
| 440/460V | [kA] | 100 | 100 | 100 | 50 | 50 | 25 | 20 | 50 | 50 | 50 |
| 500V | [kA] | 100 | 100 | 100 | 50 | 50 | 25 | 20 | 50 | 50 | 50 |
| 690V | [kA] | 10 | 6 | 10 | 6 | 4 | 4 | 4 | 10 | 6 | 6 |

① No backup fuse required.

IEC Performance Data

| | | Catalog Number KTC7-25S... | | | | | | | | | | |
|--|------|----------------------------|-------|------|-------|------|------|------|------|------|-----|-----|
| | | 0.16A | 0.25A | 0.4A | 0.63A | 1A | 1.6A | 2.5A | 4A | 6.3A | 10A | 16A |
| Rated Operational Current, I_e | [A] | 0.16 | 0.25 | 0.4 | 0.63 | 1 | 1.6 | 2.5 | 4 | 6.3 | 10 | 16 |
| Magnetic Release Current | [A] | 3.2 | 5.2 | 8.2 | 13 | 21 | 32 | 52 | 82 | 130 | 208 | 260 |
| Switching of Standard Three-Phase Motors | | | | | | | | | | | | |
| AC-2, AC-3 | | | | | | | | | | | | |
| 230/240V | [kW] | ~ | ~ | 0.06 | 0.09 | 0.18 | 0.25 | 0.37 | 0.75 | 1.5 | 2.2 | 4.0 |
| 400/415V | [kW] | 0.02 | 0.04 | 0.09 | 0.18 | 0.25 | 0.55 | 0.75 | 1.5 | 2.2 | 4.0 | 7.5 |
| 500V | [kW] | 0.06 | 0.09 | 0.12 | 0.18 | 0.37 | 0.75 | 1.1 | 2.2 | 3.0 | 6.3 | 10 |
| 690V | [kW] | 0.06 | 0.09 | 0.18 | 0.25 | 0.55 | 1.1 | 1.8 | 3.0 | 4.0 | 7.5 | 13 |
| Back-up Fuses | | | | | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | | | | | |
| 230/240V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ |
| 400/415V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 |
| 440/460V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 63 | 80 |
| 500V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 80 |
| 690V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 16 | 20 | 35 | 50 | 50 | 63 |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | | | | | |
| I_{cu} | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 50 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 10 | 10 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 10 | 10 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 8 | 6 | 6 | 4 | 4 | 3 |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | | | | | |
| I_{cs} | | | | | | | | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 15 |
| 440/460V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 10 | 6 |
| 500V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 10 | 6 |
| 690V | [kA] | 100 | 100 | 100 | 100 | 100 | 8 | 6 | 6 | 4 | 4 | 3 |

⓪ No backup fuse required.

IEC Performance Data

| | | Catalog No. KTC7-25H... | | Catalog No. KTC7-45H... | |
|--|------|-------------------------|-----|-------------------------|-----|
| | | 16A | 20A | 25A | 32A |
| Rated Operational Current, I_e | [A] | 16 | 20 | 25 | 32 |
| Magnetic Release Current | [A] | 260 | 325 | 416 | 585 |
| Switching of Standard Three-Phase Motors | | | | | |
| AC-2, AC-3 | | | | | |
| 230/240V | [kW] | 4.0 | 5.5 | 6.3 | 7.5 |
| 400/415V | [kW] | 7.5 | 10 | 11 | 15 |
| 500V | [kW] | 10 | 11 | 15 | 20 |
| 690V | [kW] | 13 | 17 | 22 | 30 |
| Back-up Fuses | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | |
| 230/240V | [A] | ❶ | ❶ | ❶ | ❶ |
| 400/415V | [A] | 80 | 100 | 100 | 125 |
| 440/460V | [A] | 80 | 100 | 100 | 125 |
| 500V | [A] | 80 | 80 | 100 | 125 |
| 690V | [A] | 63 | 63 | 80 | 100 |
| Ultimate Short-Circuit Breaking Capacity | | | | | |
| I_{cu} | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 100 | 65 | 65 | 65 |
| 440/460V | [kA] | 50 | 25 | 65 | 65 |
| 500V | [kA] | 50 | 25 | 50 | 50 |
| 690V | [kA] | 6 | 6 | 10 | 10 |
| Rated Service Short-Circuit Breaking Capacity | | | | | |
| I_{cs} | | | | | |
| 230/240V | [kA] | 100 | 100 | 100 | 100 |
| 400/415V | [kA] | 25 | 25 | 50 | 50 |
| 440/460V | [kA] | 25 | 25 | 50 | 50 |
| 500V | [kA] | 25 | 25 | 50 | 50 |
| 690V | [kA] | 4 | 4 | 6 | 6 |

❶ No backup fuse required.

IEC Performance Data

| | | Catalog Number KTV7-25H... | | | | | | | | | |
|--|------|----------------------------|------|------|------|-----|-----|-----|-----|------|-----|
| | | 1.6A | 2.5A | 4A | 6.3A | 10A | 16A | 20A | 25A | 29A | 32A |
| Rated Operational Current, I_e | [A] | 1.6 | 2.5 | 4.0 | 6.3 | 10 | 16 | 20 | 25 | 29 | 32 |
| Magnetic Release Current | [A] | 82 | 82 | 82 | 82 | 130 | 208 | 260 | 325 | 402 | 448 |
| Switching of Standard Three-Phase Motors | | | | | | | | | | | |
| AC-3 | | | | | | | | | | | |
| 230/240V | [kW] | 0.25 | 0.37 | 0.75 | 1.5 | 2.2 | 4 | 5.5 | 5.5 | 7.5 | 7.5 |
| 400/415V | [kW] | 0.55 | 0.75 | 1.5 | 2.2 | 4 | 7.5 | 10 | 11 | 13 | 15 |
| 500V | [kW] | 0.75 | 1.1 | 2.2 | 3 | 6.3 | 10 | 11 | 15 | 18.5 | 20 |
| 690V | [kW] | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| Back-up Fuses | | | | | | | | | | | |
| gG, gL, only if $I_{cc} \geq I_{cu}$ | | | | | | | | | | | |
| 230/240V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ |
| 400/415V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 100 | 100 | 125 | 125 |
| 440/460V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 100 | 100 | 125 | 125 |
| 500V | [A] | ⓪ | ⓪ | ⓪ | ⓪ | ⓪ | 80 | 80 | 80 | 100 | 100 |
| 690V | [A] | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| Ultimate Short-Circuit Breaking Capacity | | | | | | | | | | | |
| I_{cu} | | | | | | | | | | | |
| 230/240V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 |
| 400/415V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 |
| 440/460V | [kA] | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 25 | 25 |
| 500V | [kA] | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 25 | 25 |
| 690V | [kA] | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| Rated Service Short-Circuit Breaking Capacity | | | | | | | | | | | |
| I_{cs} | | | | | | | | | | | |
| 230/240V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 |
| 400/415V | [kA] | 65 | 65 | 65 | 65 | 65 | 50 | 25 | 25 | 25 | 25 |
| 440/460V | [kA] | 65 | 65 | 65 | 65 | 65 | 50 | 25 | 25 | 20 | 20 |
| 500V | [kA] | 65 | 65 | 65 | 65 | 65 | 50 | 25 | 25 | 20 | 20 |
| 690V | [kA] | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |

⓪ No backup fuse required.

General Data

| | | KT7-25S/32S | KT7-25H/32H | KT7-45H |
|--|------------------------------|--|--------------------|------------------|
| Rated Insulation Voltage IEC, SEV, VDE 0660 UL, CSA | | 690V 600V | 690V 600V | 690V 600V |
| Rated Impulse Withstand Voltage (main & auxiliary circuits) U_{imp} /pollution degree | | 6kV/3 | 6kV/3 | 6kV/3 |
| Rated Frequency | | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Utilization Category • IEC 60949-2 (Motor Protector) • IEC 60949-4-1 (Motor Starter) | | A AC-3 | A AC-3 | A AC-3 |
| Life Span Mechanical Electrical (I_e max.) | [operations] [operations] | 100,000 100,000 | 100,000 100,000 | 30,000 30,000 |
| Switching Frequency | [operations] | max. 25/h. (motor starts) | | |
| Ambient Temperature Storage Operation | | -40° C... +80° C -25° C... +60° C | | |
| Resistance to Climatic Change | | IEC 68-2 | | |
| Moisture / Heat Resistance | (60068-2-3) | 40°C, 93% relative humidity, 56 days | | |
| Moisture / Change Resistance | (60068-2-3) | 23°C, 83% relative humidity / 40°C, 92%, 56 cycles | | |
| Dry Heat | (60086-2-2) | 100°C Relative Humidity <50% 7 Days | | |
| Site Altitude | | to 2,000 m N.N. | | |
| Protection Class | | KT 7-25/32 : IP2X from all directions KT 7-45: IP2X from front with front (upper) terminal wired | | |
| Resistance to Shock | (60068-2-2) | 30 G, 11 ms All Axes | | |
| Resistance to Vibration | (60068-2-6) | 5G | | |
| Rated Thermal Current I_{th} IEC, SEV, VDE 0660 Up to 60° C ambient temperature | [A] | 0.1...32 | 1.6...32 | 6.3...45 |
| Dependence on Temperature | | 40°C - 60°C No Reduction 70°C 15% Reduction of the upper rated current I_e | | |
| Overload Protection Characteristics Ambient temperature Compensation Phase-failure protection Trip Class | | IEC60947-4-1 Motor protection (except KTB7) -20° C... +60° C yes, differential release 10 (Except KTB7) fixed setting | | |
| Magnetic Release Response Current (+/- 20%) | | 13...14 x I_e max. (for KTA7/KTB7) 16...21 x I_e max. (for KTC7) I_e max. = maximum values of setting ranges Fixed magnetic setting for KTV7, see ratings | | |
| Total Power Loss P_v Motor protector at rated load Operating temperature | [W] | 6...11.5 | 6...11.6 | 9...16 |
| Application Conditions (KTV7) | | PWM frequency ≤ 4kHz VFD output frequency ≤ 400 Hz | | |

Weights

| Description | Catalog Number | Weight | Description | Catalog Number | Weight |
|--------------------|----------------|------------|----------------------|----------------|--------|
| Motor Protectors | KTA7-25S/32S | 317 g | Lockable Twist Knob | KT7-KN1 | 5 g |
| | KTA7-25H/32H | 373 g | | KT7-KRY1 | |
| | KTA7-45H | 782 g | Locking Tag | KT7-DS | 30 g |
| | KTB7-25S/32S | 315 g | | KT7-HTN | |
| | KTB7-25H/32H | 365 g | Door Coupling Handle | KT7-HTRY | 123 g |
| | KTB7-45H | 782 g | | KT7-HT | |
| | KTC7-25S/32S | 315 g | Extension Shaft | KT7-HT | 46 g |
| | KTC7-25H/32H | 365 g | Legend Plate | KT7-HTFC | 4 g |
| | KTC7-45H | 782 g | Feeder Terminal | KT7-32-A3E | 172 g |
| KT7-PE1 | 10 g | KT7-45-A3E | | | |
| Auxiliary Contacts | KT7-PA1 | 15 g | Commoning Links | KT7-32-DB-45-2 | 47 g |
| | KT7-PEF1 | 15 g | | KT7-32-DB-45-3 | 80 g |
| | KT7-PAF1 | 15 g | | KT7-32-DB-45-4 | 104 g |
| Undervoltage Trip | KT7-UA-* | 108 g | | KT7-32-DB-45-5 | 132 g |
| | KT7-AA-* | 110 g | | KT7-32-DB-54-2 | 52 g |
| | KT7-UA-L20-* | 116 g | KT7-32-DB-54-3 | 86 g | |
| Anti-Tamper Cover | KT7-25-CA | 2 g | KT7-32-DB-54-4 | 118 g | |
| | | | KT7-32-DB-54-5 | 154 g | |

General Data



KT_7-25S/32S



KT_7-25H/32H



KT_7-45H

Features and Approvals

| | | | |
|--|------------|------------|------------|
| Max. Current I_n | 32 A | 32 A | 45 A |
| Current Rating | 0.1...32 A | 1.6...32 A | 6.3...45 A |
| Short Circuit Protection | ✓ | ✓ | ✓ |
| Standard magnetic Trip | ✓ | ✓ | ✓ |
| High Magnetic Trip | ✓ | ✓ | ✓ |
| Magnetic Only Trip (MCP) | ✓ | ✓ | ✓ |
| Overload Protection | ✓ | ✓ | ✓ |
| Trip Class | ✓ | ✓ | ✓ |
| Application at output of VFD (multi-motor) | | ✓ (KTV7) | ✓ |

Standards Compliance:

| | | | |
|---------------------------------------|-----------------|----------------------------|-----------------|
| CSA22.2, No. 14 | ✓ | ✓ | ✓ |
| UL508 (Group Installation) | ✓ (see ratings) | ✓ (see ratings) | ✓ (see ratings) |
| UL508 Manual, Self-protected (Type E) | ✓ (see ratings) | ✓ (see ratings) | ✓ (see ratings) |
| UL508 (Overload Protection) | ✓ | ✓ | ✓ |
| IEC60947-1,-2 | ✓ | ✓ | ✓ |
| IEC60947-4-1 | ✓ | ✓ | ✓ |
| CE | ✓ | ✓ | ✓ |
| ATEX (IEC60079-14) | ✓ (up to 25 A) | ✓ (up to 25 A except KTV7) | ✓ |
| CCC | ✓ (up to 25 A) | ✓ (up to 25 A except KTV7) | ✓ |

Accessories

| | | | |
|--------------------------|---|---|---|
| External Rotary Operator | ✓ | ✓ | ✓ |
| Auxiliary Contacts | ✓ | ✓ | ✓ |
| Trip Indicator Contacts | ✓ | ✓ | ✓ |

KT_7-25S/32S

KT_7-25H/32H

KT_7-45H

Power Terminals


Terminal Type



Screwdriver

Pozidrive No. 2/Blade No. 3

Pozidrive No. 2/Blade No. 3



1 conductor

[mm²]/[AWG]

1...6 / No. 16...10

2.5...16 / No. 14...4

2 conductor

[mm²]/[AWG]

1...4 / No. 16...10

2.5...10 / No. 14...4



1 conductor

[mm²]/[AWG]

1.5...6 / No. 16...8

2.5...16 / No. 14...4

2 conductor

[mm²]/[AWG]

1.5...6 / No. 16...8

2.5...10 / No. 14...4



1 conductor

[mm²]/[AWG]

1...6 / No. 16...10

2.5...10 / No. 14...8

2 conductor

[mm²]/[AWG]

1...6 / No. 16...10

2.5...10 / No. 14...8






Tightening torque

[Nm]/[lb-in.]

2...2.5 / 18...22

3...3.5 / 27...30

Accessories for KT7 Motor Circuit Controllers

| | | Auxiliary Contact Blocks for Front Mounting Catalog Number KT7-PE1, KT7-PEF1 | | | Auxiliary Contact Blocks for Right-Side Mounting Catalog Number KT7-PA1, KT7-PAF1 | | | | | |
|---|-------------|---|---|------|--|---|------|------|-----|-----|
| IEC Rated Thermal Current I_{th} | | | 300 max. | | | 600 max. | | | | |
| Rated Voltage | [V] | | | | | | | | | |
| at 40°C ambient temperature | [A] | | 5 | | | 10 | | | | |
| at 60°C ambient temperature | [A] | | 4 | | | 6 | | | | |
| UL/CSA Rated Thermal Current I_{th} | | | 300 max. | | | 600 max. | | | | |
| Rated Voltage | [V] | | | | | | | | | |
| Continuous Thermal Current According to NEMA ① | AC | Class | Amps | | Class | Amps | | | | |
| | DC | B 300 | 5 | | B 600 | 5 | | | | |
| | | Q 300 | 2.5 | | Q 600 | 2.5 | | | | |
| Back-Up Fuses gG, gL | | [A] | 10 | | | 10 | | | | |
| Rated Thermal Current I_{th} | | | | | | | | | | |
| AC-15 | [V] | 24 | 120 | 240 | 24 | 120 | 240 | 415 | 690 | |
| | [A] | 4 | 3 | 1.5 | 6 | 5 | 3 | 2 | | 0.7 |
| DC-13 | [V] | 24 | 120 | 240 | 24 | 120 | 240 | 415 | | |
| | [A] | 2 | 0.5 | 0.25 | 2 | 0.5 | 0.25 | 0.15 | | |
| Terminal Parts | | |  | | |  | | | | |
| Terminal Type | | | | | | | | | | |
| Screwdriver | | | Pozidrive No. 2/Blade No. 3 | | | Pozidrive No. 2/Blade No. 3 | | | | |
|  | 1 conductor | [mm²]/[AWG] | 0.5...1.5 / No. 18...14 | | 0.5...2.5 / No. 18...14 | | | | | |
| | 2 conductor | [mm²]/[AWG] | 0.75...1.5 / No. 18...14 | | 0.75...2.5 / No. 18...14 | | | | | |
|  | 1 conductor | [mm²]/[AWG] | 0.75...1.5 / No. 18...14 | | 0.75...2.5 / No. 18...14 | | | | | |
| | 2 conductor | [mm²]/[AWG] | 0.75...1.5 / No. 18...14 | | 0.75...2.5 / No. 18...14 | | | | | |
|  | 1 conductor | [mm²]/[AWG] | 0.75...1.5 / No. 18...14 | | 0.75...2.5 / No. 18...14 | | | | | |
| | 2 conductor | [mm²]/[AWG] | 0.75...1.5 / No. 18...14 | | 0.75...2.5 / No. 18...14 | | | | | |
| Tightening torque | | [Nm]/[lb-in.] | 1.2...1.5 / 10.6...13 | | | 1.2...1.5 / 10.6...13 | | | | |
| Lockable Twist Knob (KT7-KN1 & KT7-KRY1) | | | | | | | | | | |
| Tightening torque | | [Nm]/[lb-in.] | | | | 1 / 8.8 (T10) | | | | |
| Mounting Depth – Door Coupling Handles (All KT7-HT...) | | | | | | | | | | |
| Mounting Depth when using motor circuit controller: | | | | | | | | | | |
| | KT7-25S/32S | [mm]/[in.] | 105.5 mm ± 5 mm (4.15" ± 3/16") | | | | | | | |
| | KT7-25H/32H | [mm]/[in.] | 114.5 mm ± 5 mm (4.5" ± 3/16") | | | | | | | |
| | KT7-45H | [mm]/[in.] | 137.1 mm ± 5 mm (5.4" ± 3/16") | | | | | | | |
| Mounting Depth – Extension Shaft (KT7-HT) | | | | | | | | | | |
| Mounting Depth range when using motor circuit controller: | | | | | | | | | | |
| | KT7-25S/32S | [mm]/[in.] | 117...338 mm (4.6"...13.3") | | | | | | | |
| | KT7-25H/32H | [mm]/[in.] | 126...347 mm (5.0"...13.7") | | | | | | | |
| | KT7-45H | [mm]/[in.] | 149...369 mm (5.9"...14.5") | | | | | | | |

① See page A7 for details of NEMA Contact Class.

KT7 Accessories

| | | Undervoltage Trip for Left-Side Mounting Cat. Number KT7-UA-* | Undervoltage Trip with 2 Auxiliary Contacts for Left-Side Mounting Cat. Number KT7-UA-L20-* | Shunt Trip for Left-Side Mounting Cat. Number KT7-AA-* |
|------------------------------|----------|--|--|---|
| Actuating Voltage | Pull-in | $0.85 \dots 1.1 \times U_s$ | $0.85 \dots 1.1 \times U_s$ | $0.7 \dots 1.1 \times U_s$ |
| | Drop-out | $0.7 \dots 0.35 \times U_s$ | $0.7 \dots 0.35 \times U_s$ | |
| Rated Control Voltage | minimum | 21V 50 Hz, 24V 60 Hz | 21V 50 Hz, 24V 60 Hz | 21V 50 Hz, 24V 60 Hz 600V 50 Hz |
| | maximum | 600V 50 Hz | 600V 50 Hz | |
| On-Time | | 100% | 100% | AC - 100% DC - Max. 5 sec. |
| Coil Rating | Pull-in | 8.5 VA, 8 W | 8.5 VA, 8 W | 8.5 VA, 8 W 4 VA, 2 W |
| | Hold | 4 VA, 2 W | 4 VA, 2 W | |

Terminal Parts

Terminal Type

Screwdriver



1 conductor
2 conductor

[mm²]/[AWG]
[mm²]/[AWG]



1 conductor
2 conductor

[mm²]/[AWG]
[mm²]/[AWG]



1 conductor
2 conductor

[mm²]/[AWG]
[mm²]/[AWG]

Tightening torque

[Nm]/[lb-in.]



Pozidrive No. 2/BLADE No. 3

0.5...2.5 / No. 18...14

0.75...2.5 / No. 18...14

0.75...2.5 / No. 18...14

0.75...2.5 / No. 18...14

0.75...2.5 / No. 18...14

0.75...2.5 / No. 18...14

1.2...1.5 / 10.6...13.3

| | | | Feeder Block KT7-25-A2E | Feeder Terminal KT7-32-A3E | Compact Busbar KT7-32-DB... | Feeder Terminal KT7-45-A3E | Compact Busbar KT7-45-DB... |
|--|-------------|--------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|
| Rated Thermal Current I_{th} at 60° C ambient temperature | [V] | | 600 | 600 | 600 | 600 | 600 |
| | [A] | | 64 | 64 | 64 | 120 | 120 |
| | 1 conductor | [mm ²]/[AWG] | 4...25/No. 10...4 | 2.5...25/No. 14...4 | ~ | 4...50/12...1/0 | ~ |
| | 1 conductor | [mm ²]/[AWG] | 4...25/No. 10...4 | 2.5...25/No. 14...4 | ~ | 2.5...50/12...1/0 | ~ |
| | 1 conductor | [mm ²]/[AWG] | 2.5...25/No. 14...4 | 2.5...25/No. 14...4 | ~ | 2.5...50/12...1/0 | ~ |
| | 1 conductor | [mm ²]/[AWG] | 3...3.5 / 27...31 | 3...3.5 / 27...31 | ~ | 5...6/45...54 | ~ |
| Tightening torque | | [Nm]/[lb-in.] | | | | | |

KF7 Fuse Holder Accessories

| | | KF7 Fuse Holder |
|--|------|-----------------|
| Rated Thermal Current I_{th} at 60° C ambient temperature | [V] | 600 |
| | [A] | 30 |
| Short Circuit | | |
| Withstand | [KA] | 200 |
| U_{imp} | [KV] | 6 |

Terminal Parts

Terminal Type

Screwdriver



1 conductor

[mm²]/[AWG]

1...4 / No. 16...10



1 conductor

[mm²]/[AWG]

1...4 / No. 16...10


Tightening torque

[Nm]/[lb-in.]



Pozidrive No. 2/
Blade No. 3

Time-Current Characteristic

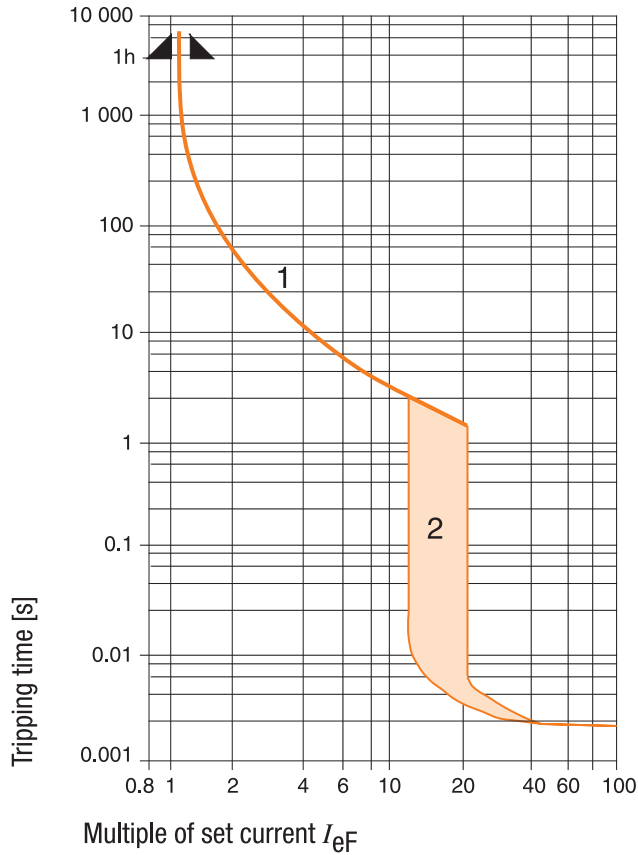

KTA7 Motor Protection (for KTV7, see ratings)

1. Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20°C starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single-phasing. The overload characteristic is also valid for transformer protection.

2. Magnetic Release Trip Current


The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13 times the maximum value of setting range (high inrush protection $\sim 20 \times I_n$ maximum). At a lower overload setting the magnetic trip is correspondingly higher.

Current Setting I_{ef}


The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g., reduced I_n for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current I_n of the motor.

Cut-off Current ❶

KT A/B/C7-25/32S
Max. Cut-Off-Current, $U_e = 500V$

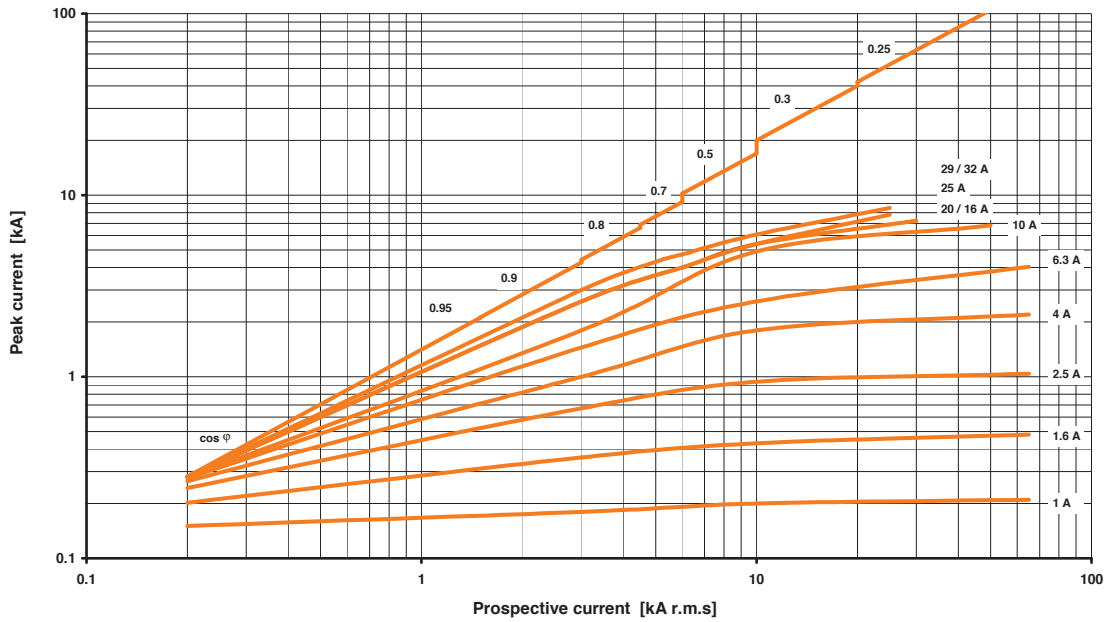


KT A/B/C7-25/32H
Max. Cut-Off Current, $U_e = 500V$

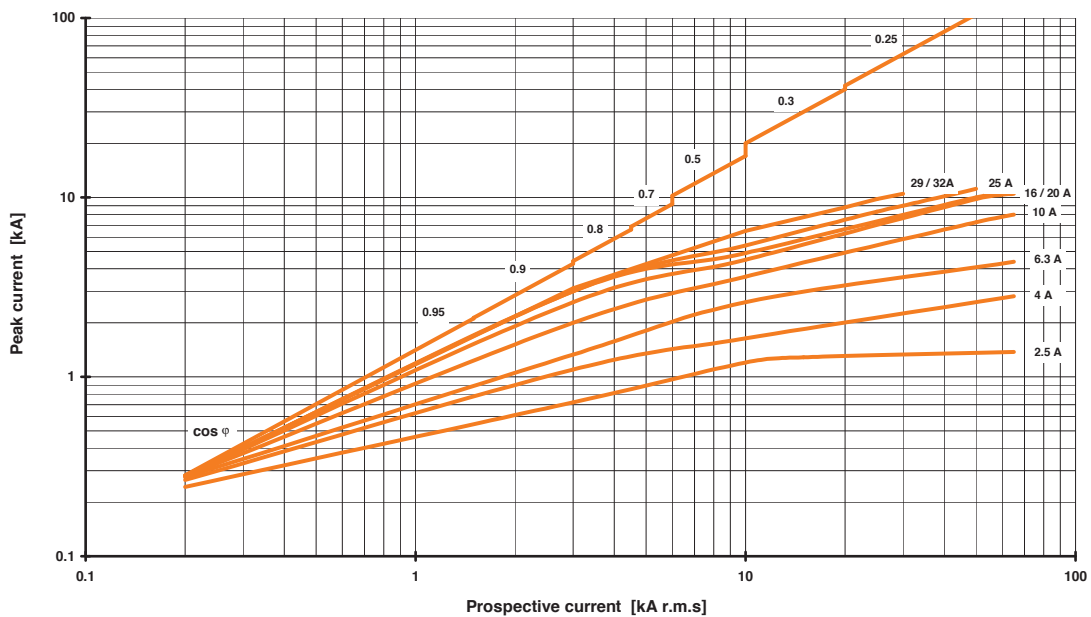


❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.

Cut-off Current ①

KTA/B/C7-45H
Max. Cut-Off Current, $U_e = 500V$


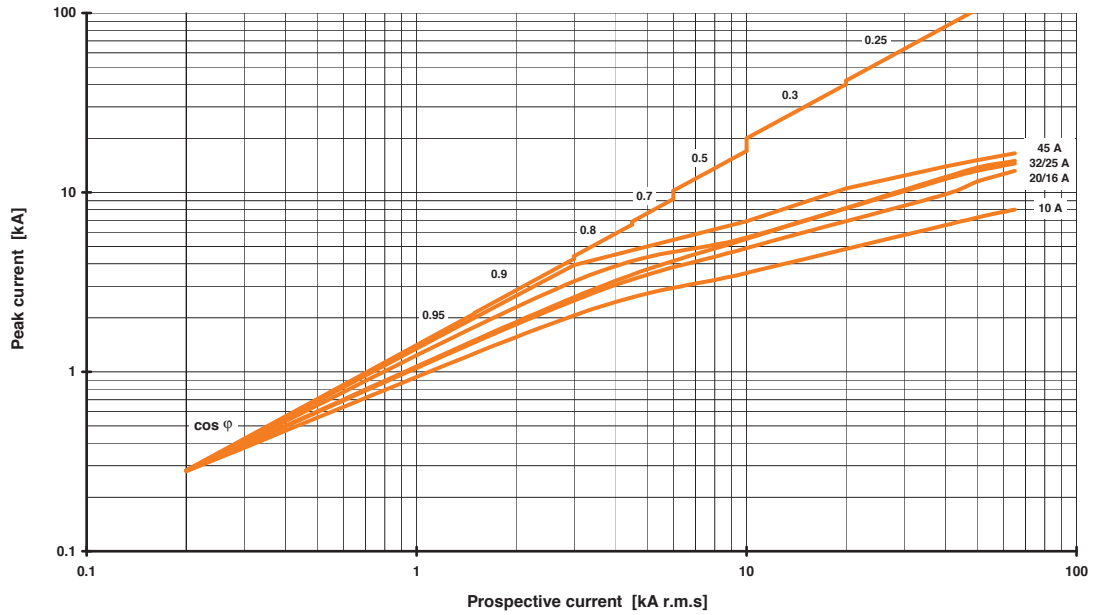


KTV7
Max. Cut-Off Current, $U_e = 400...415V$

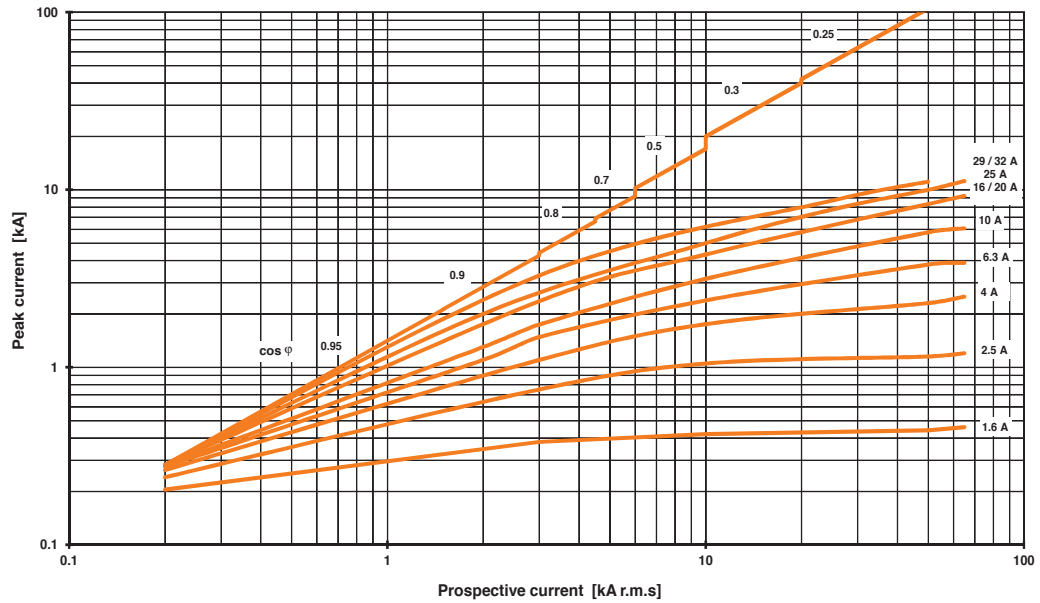

① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.


Let-Through Energy ①

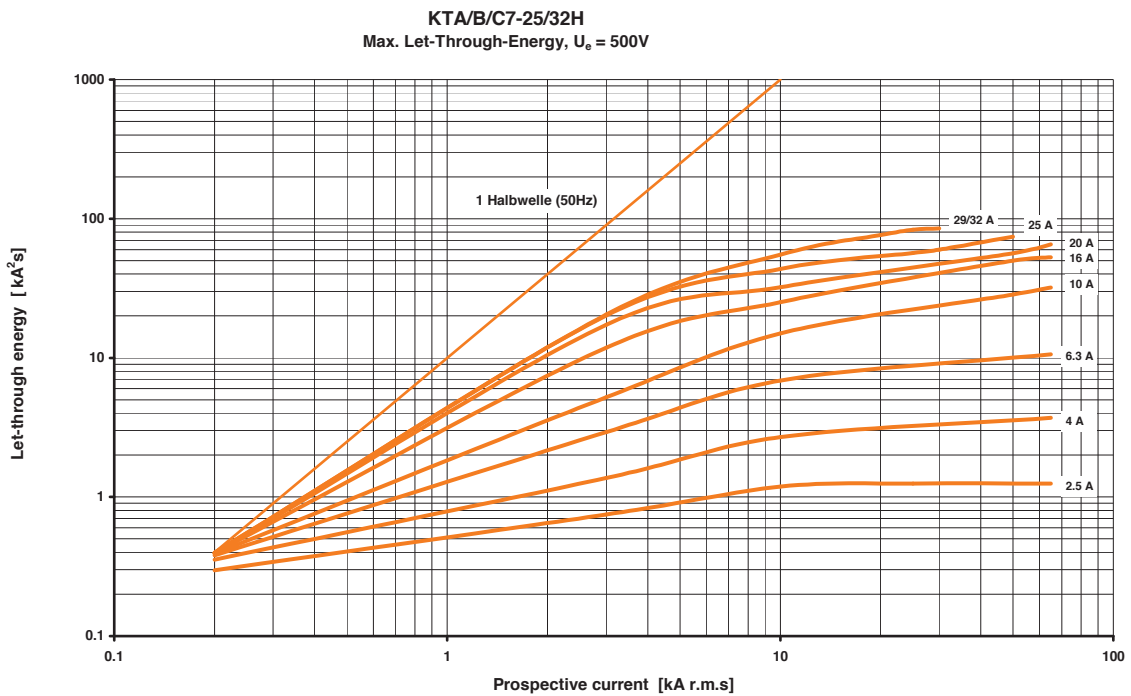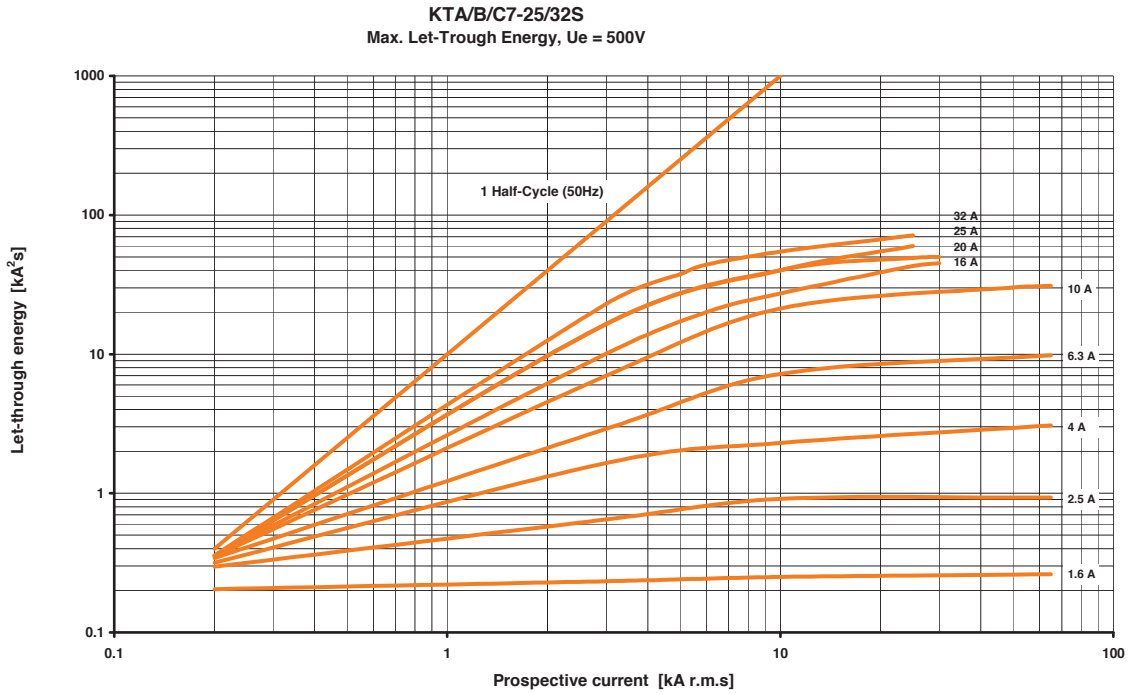


① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.

Let-Through Energy ①

KTA/B/C7-45H
Max. Let-Through-Energy, $U_0 = 500V$

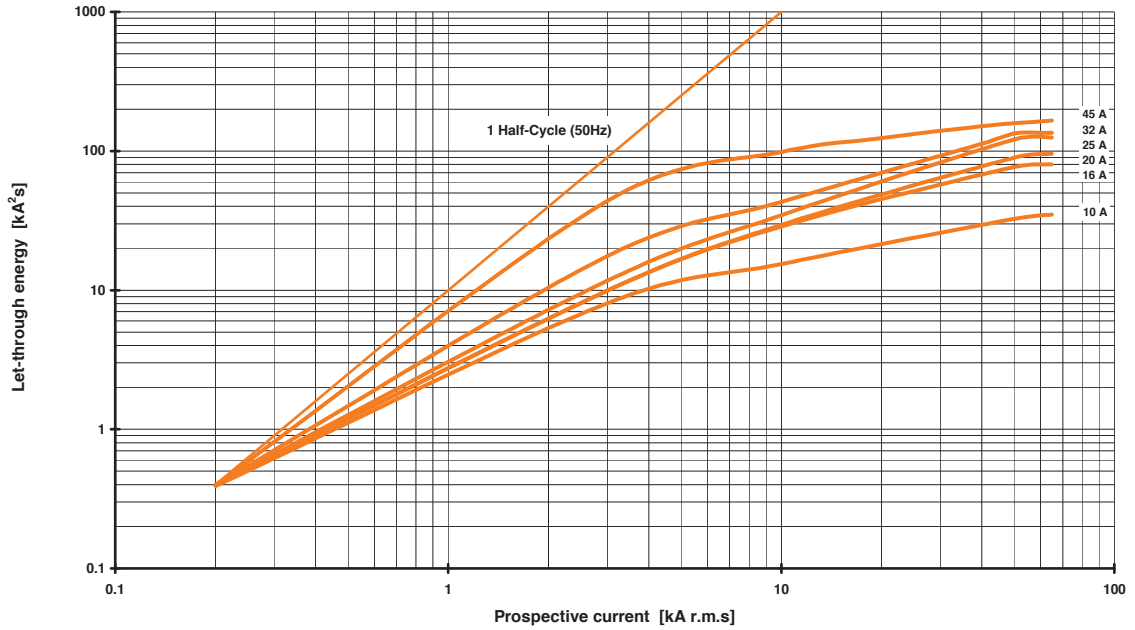

KTV7
Max. Let-Through-Energy, $U_0 = 400... 415V$

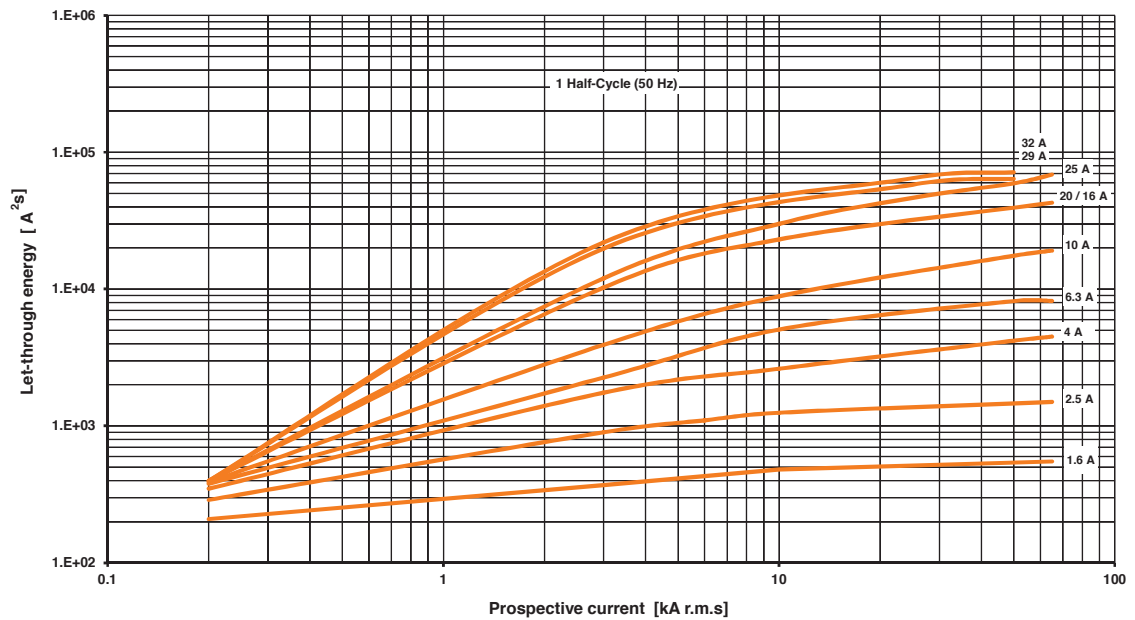


① A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I²t)" curves for 400...415V, 500V and 690V can be downloaded from <http://www.sprecherschuh.com>.


KTA7/KTB7 & KTC7 Bus Bar and Supply Blocks

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.


KT7-32-A3E







KT7-45-A3E



KT7-32-DB




KT7-45-DB

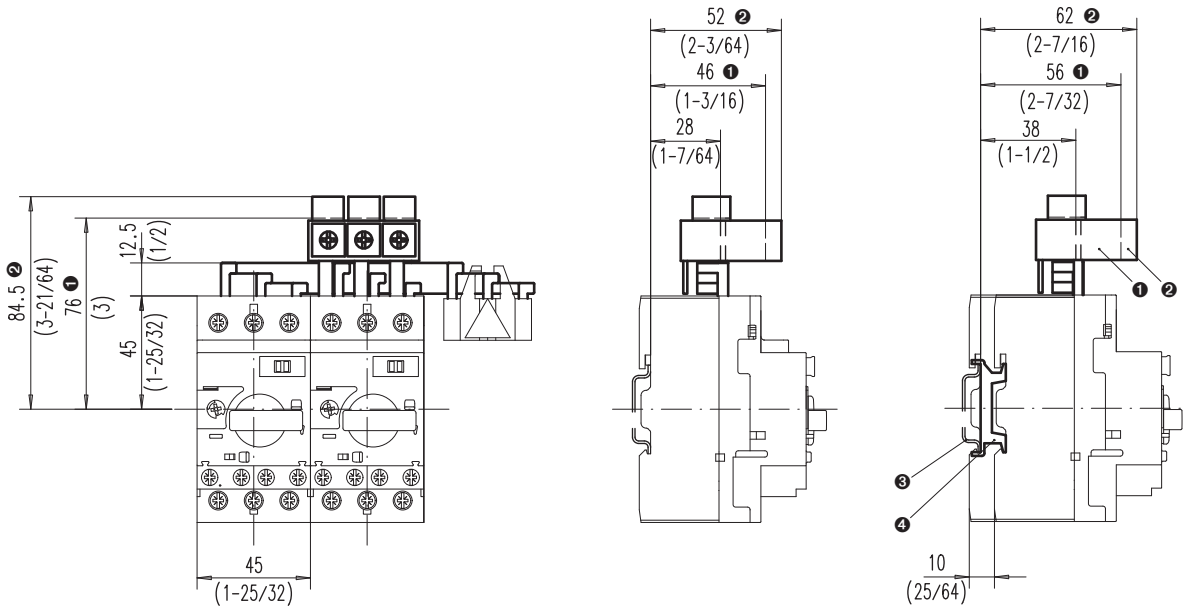

- ❶ Compact Busbar Feeder Terminal IEC
- ❷ Compact Busbar Feeder Terminal UL type E and IEC
- ❸ Mounting on 35 mm DIN Rail
- ❹ Top Hat Rail Adapter 10 mm


KT_7-25/32 Motor Circuit Controllers (without Terminal Adaptor KT7-25-TE1)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

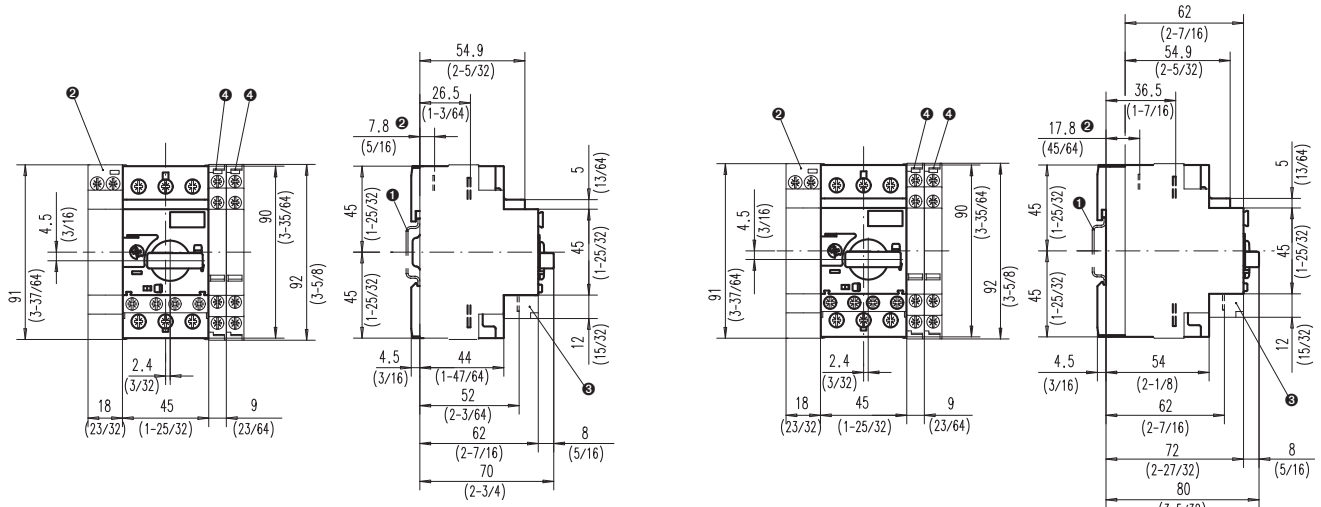


- ① Mounting on 35 mm DIN rail
- ② Undervoltage/shunt trip
- ③ Auxiliary contact (front mounted)
- ④ Auxiliary contact (side mounted)

KT_7-25/32 Motor Circuit Controllers (with Terminal Adaptor KT7-25-TE1)

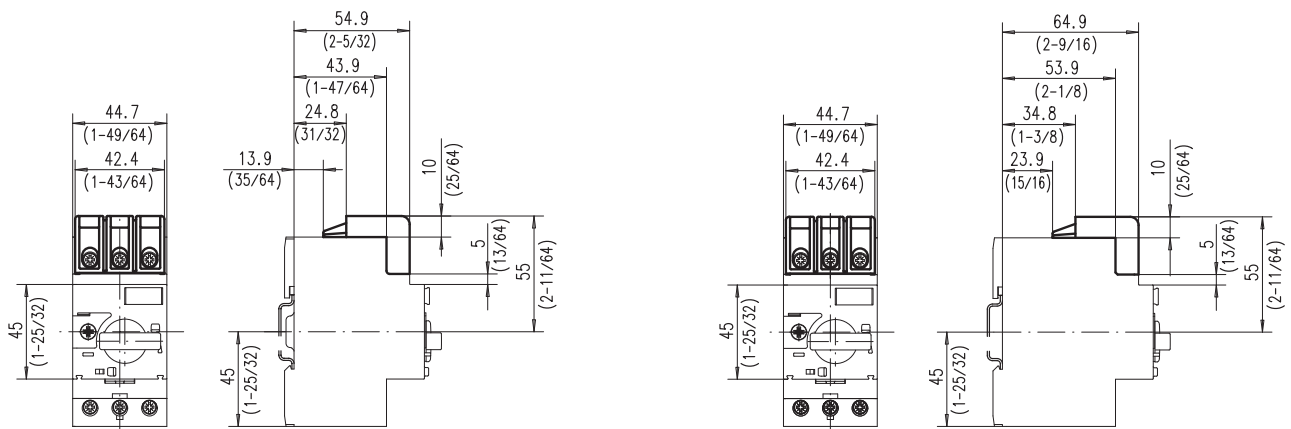

KT_7-45H Motor Circuit Controllers (without Terminal Adaptor KT7-45-TE)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

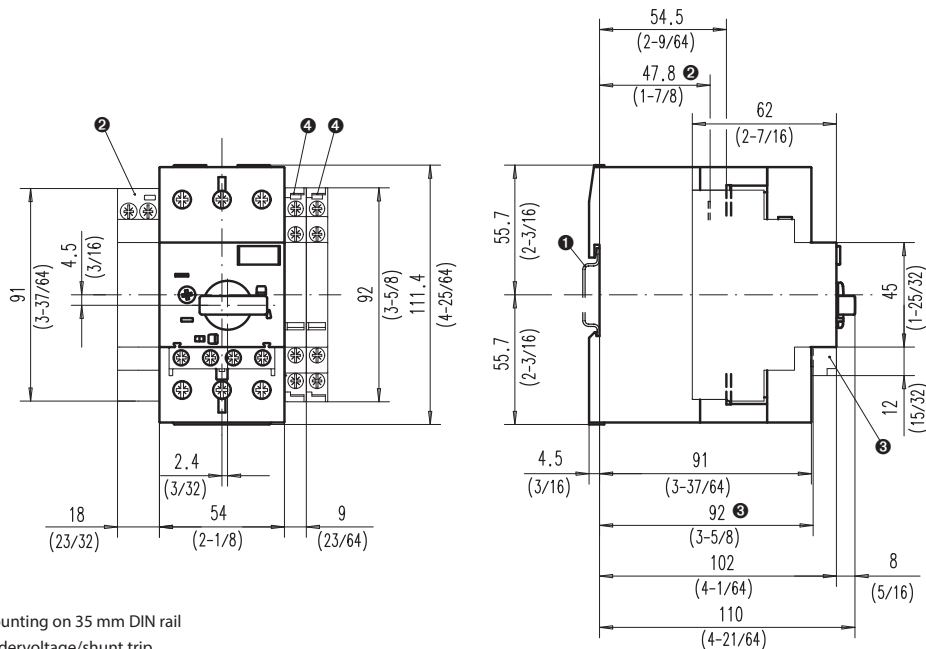

- ❶ Mounting on 35 mm DIN rail
- ❷ Undervoltage/shunt trip
- ❸ Auxiliary contact (front mounted)
- ❹ Auxiliary contact (side mounted)

KT_7-45H


KT_7-45H Motor Circuit Controllers (with Terminal Adaptor KT7-45-TE)

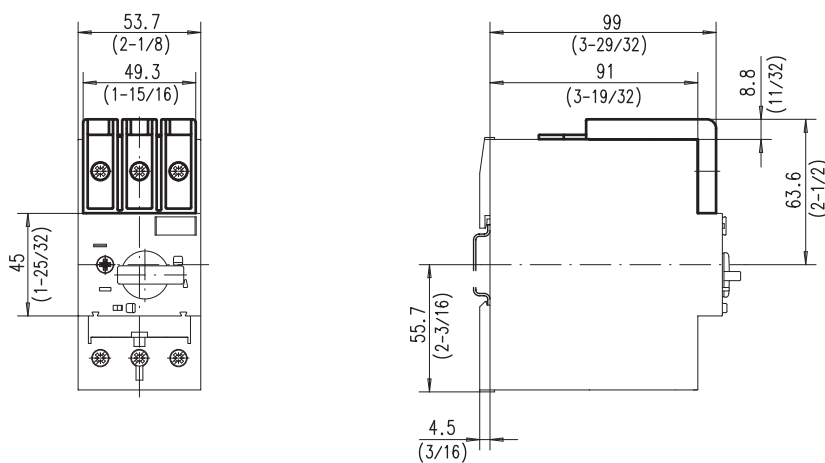


KT_7-45H

KTV7-25/32 Motor Circuit Controllers


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

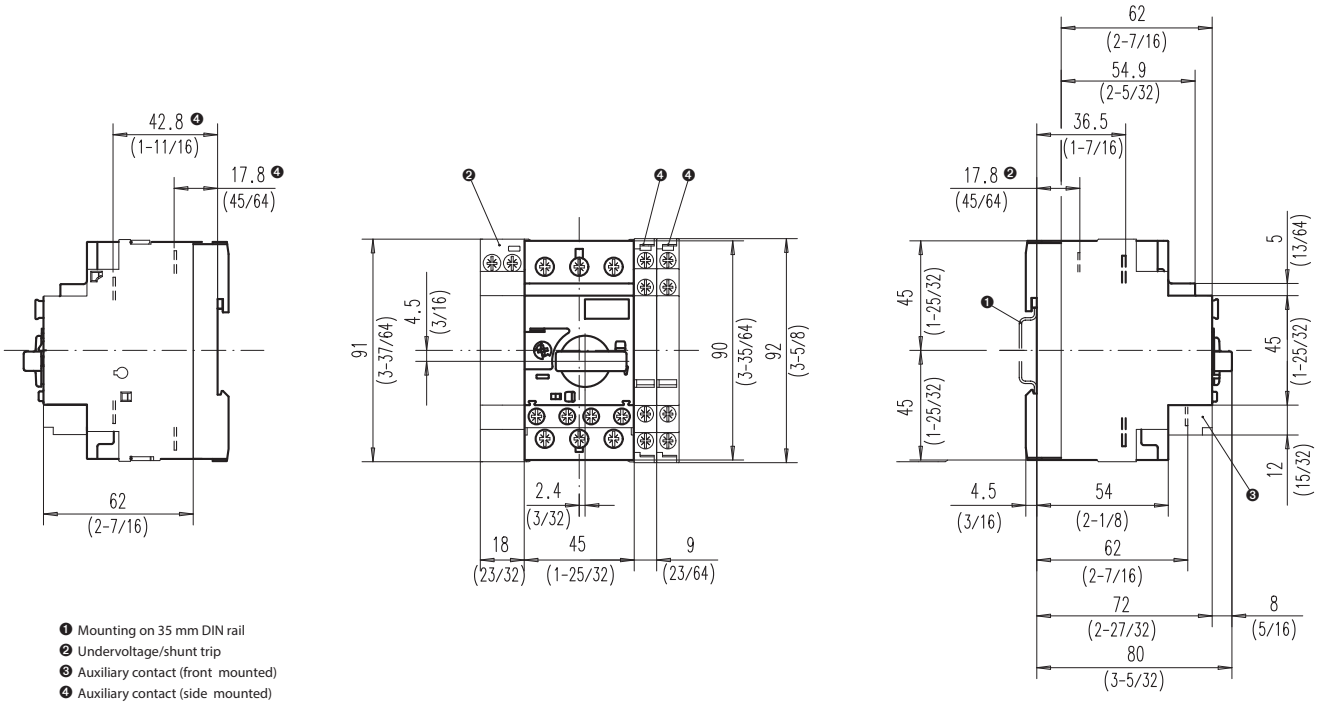

Minimum distance to grounded parts or walls

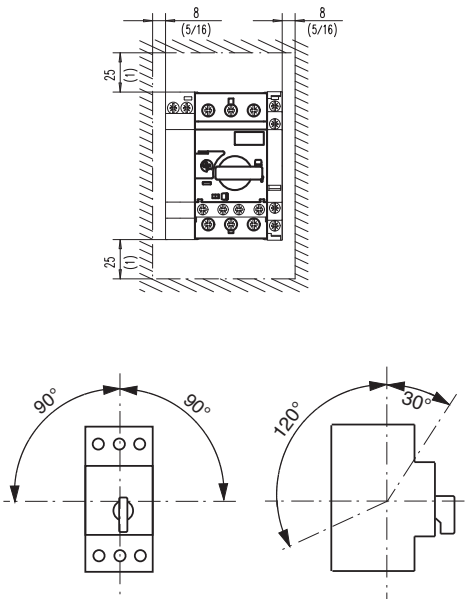


KT7-TE1 Type E adapter on KTV7

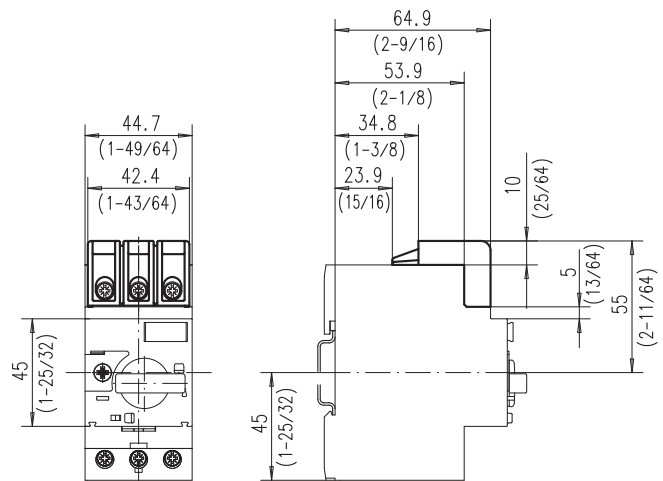


KT7 Motor Circuit Controllers Mounting/Safety Clearance

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

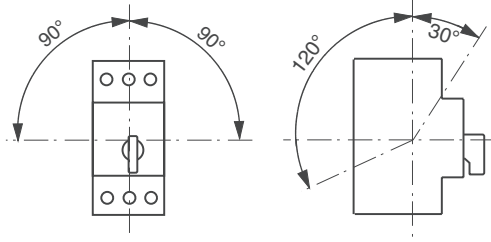


① Minimum distance to grounded parts or walls


KT_7-25/32




KT_7-45H

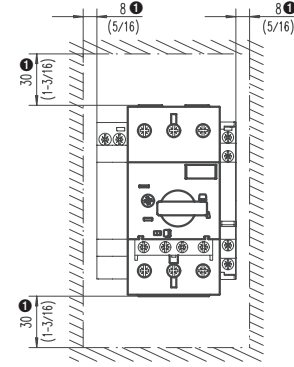


KT7-45-AS Screw Adapter

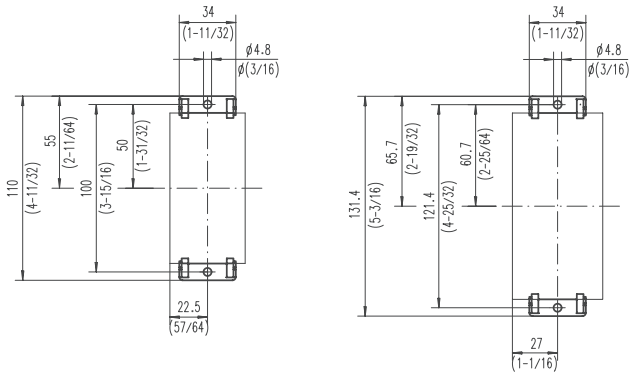

KT7-25-A2E Terminal Block

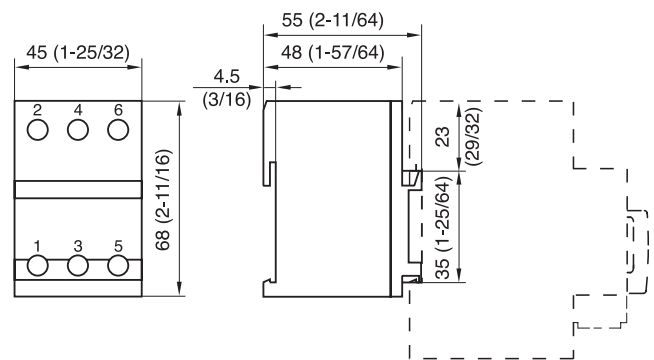


Mounting Position KT7, KTU7

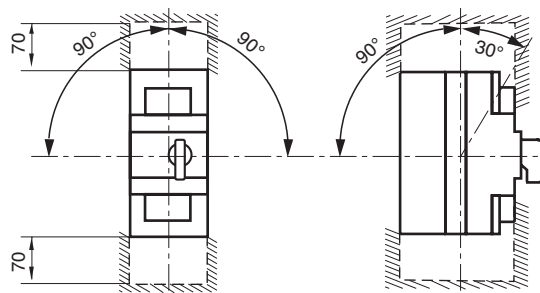

Mounting position/safety clearance

KT7-HTN/HTRY Motor Circuit Controller Door Coupling Handle

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

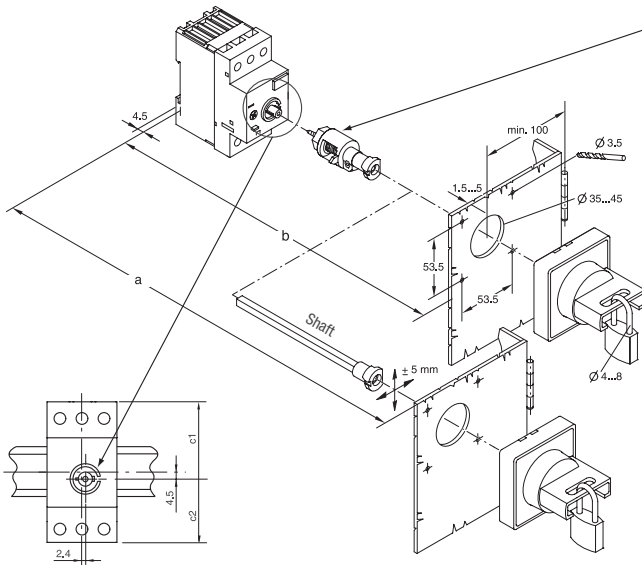

KT7-HTC Coupling is included in Door Handle Kits KT7-HTN and KT7-HTRY. This coupling replaces the knob shipped as standard on the controller. Design "D" Door Coupling Handle Kits include an interface for the "Stops" molded into Design "C" KTA7/KTB7/KTC7 Controllers, which inhibits excessive rotation of the handle mechanism. The old Design "C" Door Handle Kits will fit new Design "C" Controllers (shipped in WHITE boxes), but will not take advantage of the "Stops". Design "D" Door Handle Kits are backward compatible.

Shaft Dimensions


| | a | | b No Shaft | c1 | c2 |
|--------------------|----------------------------------|---------------------------------|---------------|-------|-------|
| | Includes 250mm Shaft KT7-HT | Includes 400mm Shaft KT7-HTL | | | |
| KT7-25S/32S | 117...338 (4.6...13.3 in) | 117...488 (4.6...19.2 in) | 105.5 ± 5 | 49.5 | 40.5 |
| KT7-25H/32H | 126...347 (5.0...13.7 in) | 126...497 (5.0...19.6 in) | 114.5 ± 5 | 49.5 | 40.5 |
| KT7-45H | 148.6...369.6 (5.9...14.5 in) | 148.6...519 (5.9...20.4 in) | 137.1 ± 5 | 59.35 | 50.35 |

If using KT7-SHS Shaft Support see page F41 for dimensions

KTA7/KTB7/KTC7 with CA7 Connection Modules and Kits



Combo 1)

KT7-25S-Pec23
KT7-25H-Pec23




Standard Connection Modules 2)


KT7-25S-PNC23 KT7-25H-PNC37
KT7-25H-PNC37




KT7-45H-PNC37



KT7-45H-PNC43



Coil Extension Modules 3)

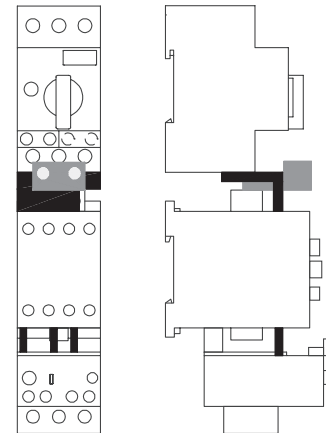

1) Combo Modules

Electrical and mechanical connection between motor circuit controller and contactors with AC coil. For CA7-9...23 only. Compatible with the reversing- and WYE-delta starter components.

2) Standard Connection Modules

Electrical connection between motor circuit controller and contactors with AC coil. For CA7-9...43. Compatible with the reversing- and WYE-delta starter components.


3) Coil Extension Modules

Simplifies access to the coil terminals on 3-component starters.


For CA7-9...23 = **KT7-25S-PSC23**

For CA7-30...43 = **KT7-45H-PSC43**


KT7 Handle Assembly with KT7-SHS Shaft Support

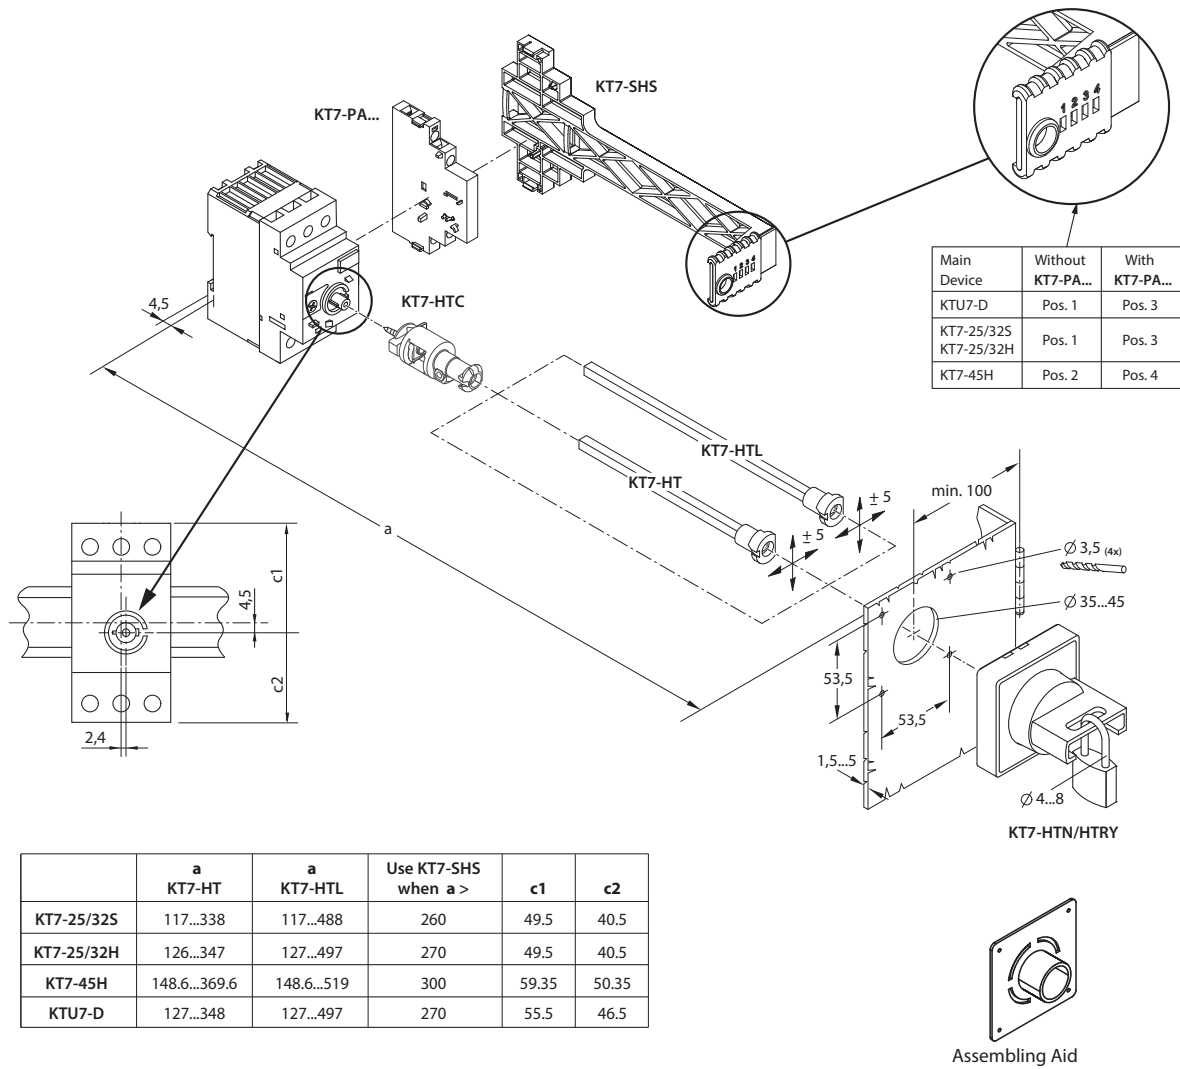


KT7-SHS Shaft Support Dimensions

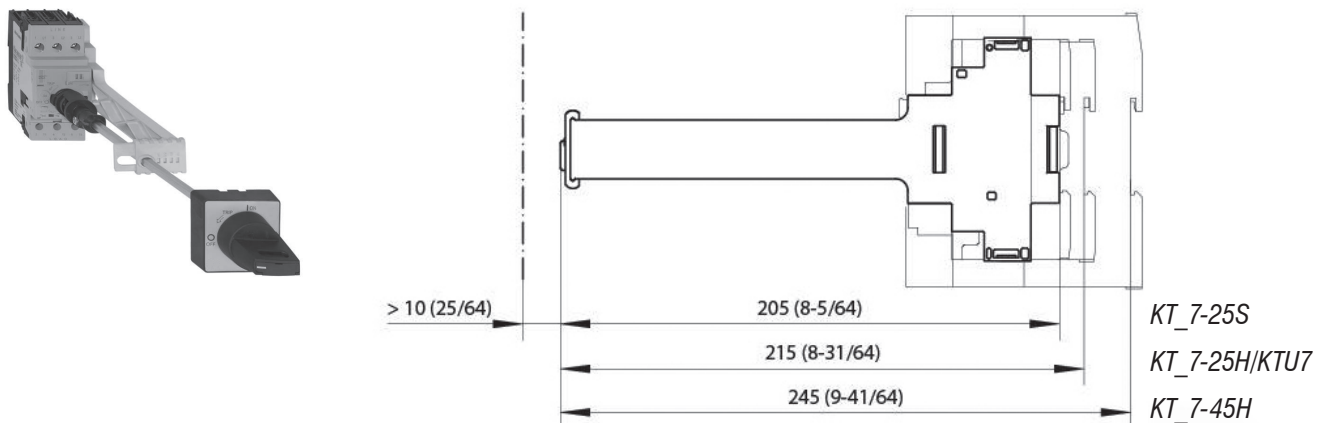

KT7-SY/SB Switch Handle

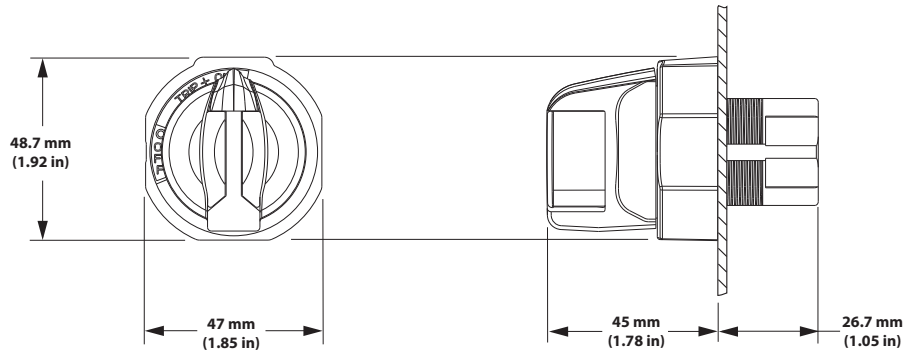


KT7-SY/SB Assembly

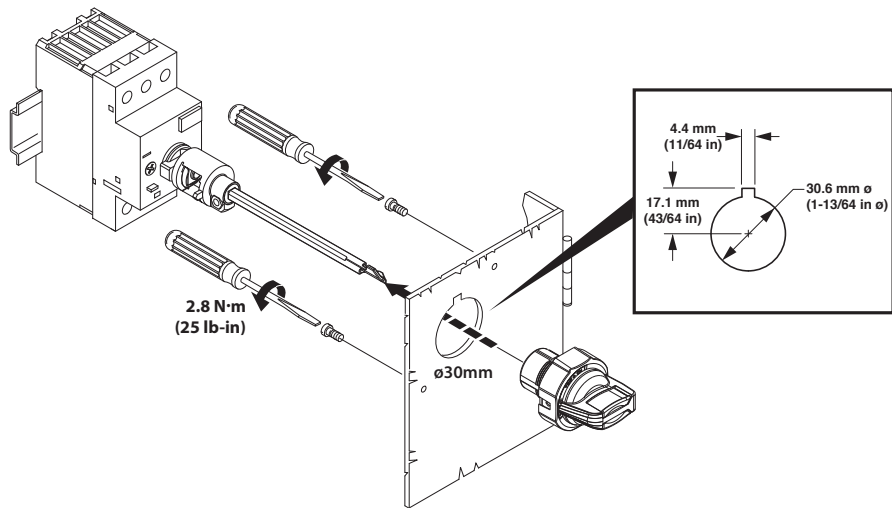

F
Motor Circuit Controllers

Type W Mounting Modules & Spacer ①

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

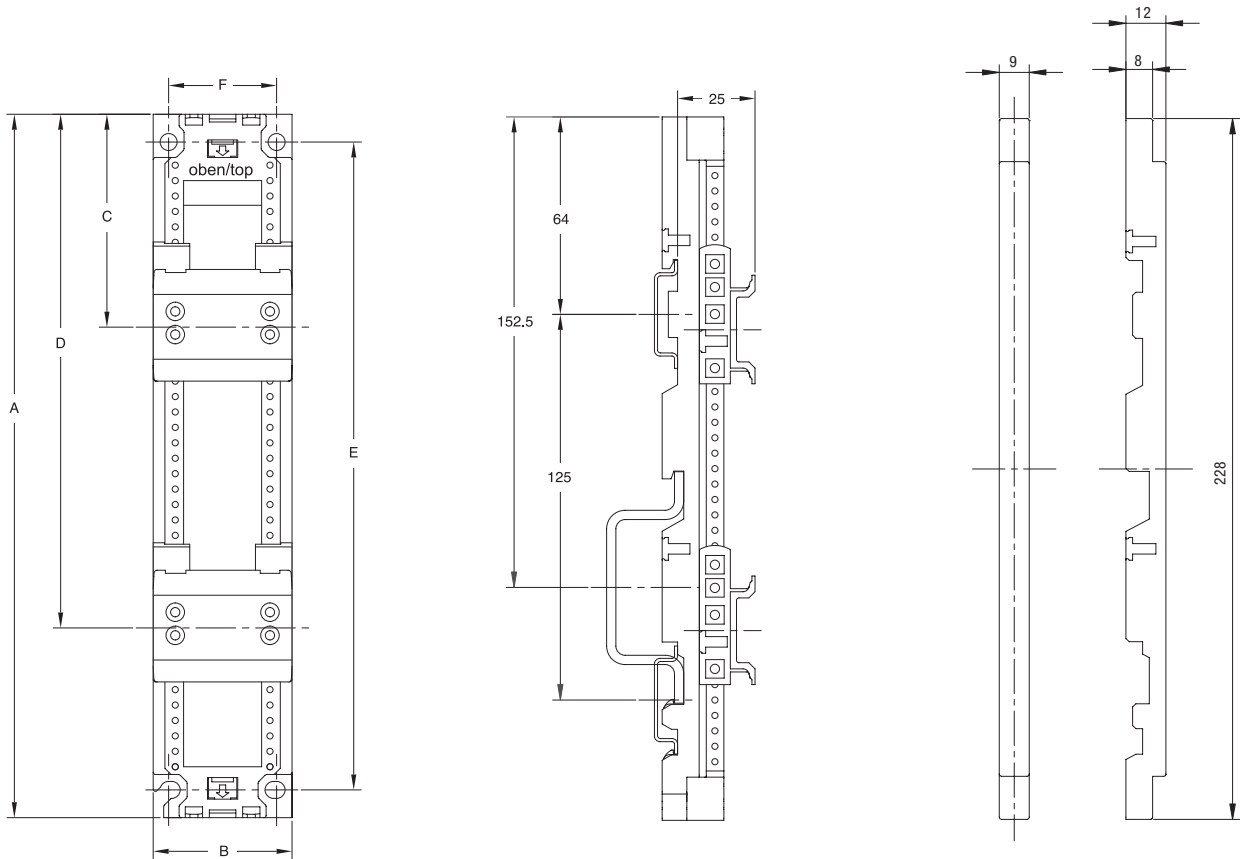


Spacer W-32955

| Catalog Number | A | B | C | D | E | F |
|----------------|------------------|-----------------|-----------------|--------------------|------------------|-----------------|
| W-32489 | 228 (8-31/32) | 45 (1-25/32) | 69 (2-23/32) | 165.5 (6-35/64) | 210 (8-17/64) | 35 (1-3/8) |
| W-32490 | 228 (8-31/32) | 54 (2-1/8) | 69 (2-23/32) | 174 (6-27/32) | 210 (8-17/64) | 40 (1-37/64) |
| W-32496 | 283 (11-9/64) | 45 (1-25/32) | 69 (2-23/32) | 166.5 (6-35/64) | 265 (10-7/16) | 40 (1-37/64) |
| W-32497 | 283 (11-9/64) | 54 (2-1/8) | 69 (2-23/32) | 174 (6-27/32) | 265 (10-7/16) | 40 (1-37/64) |


① Use Pozidriv #1 (PZ1) screwdriver on DIN rail screws.

KF7 Fuse Holders Dimensions


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

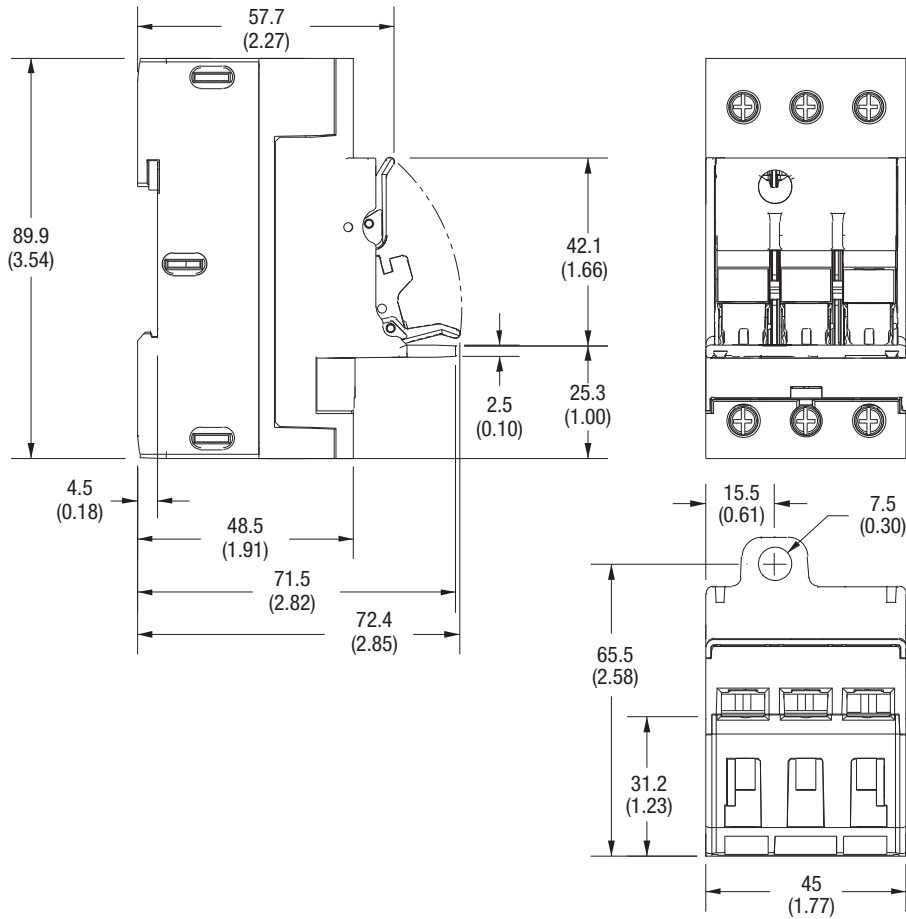


KF7 Fuse Holders Wiring Diagram (IEC)

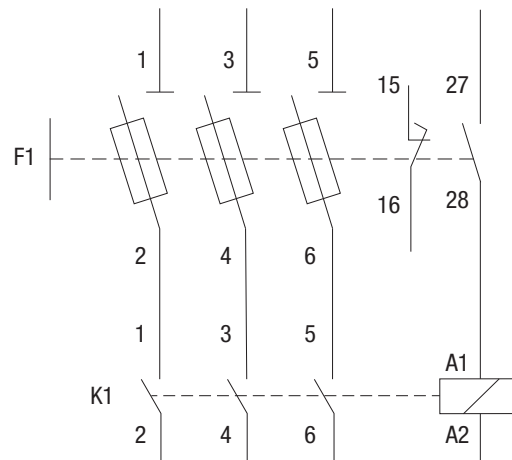

KF7 Fuse Holder used with CA7 Contactor

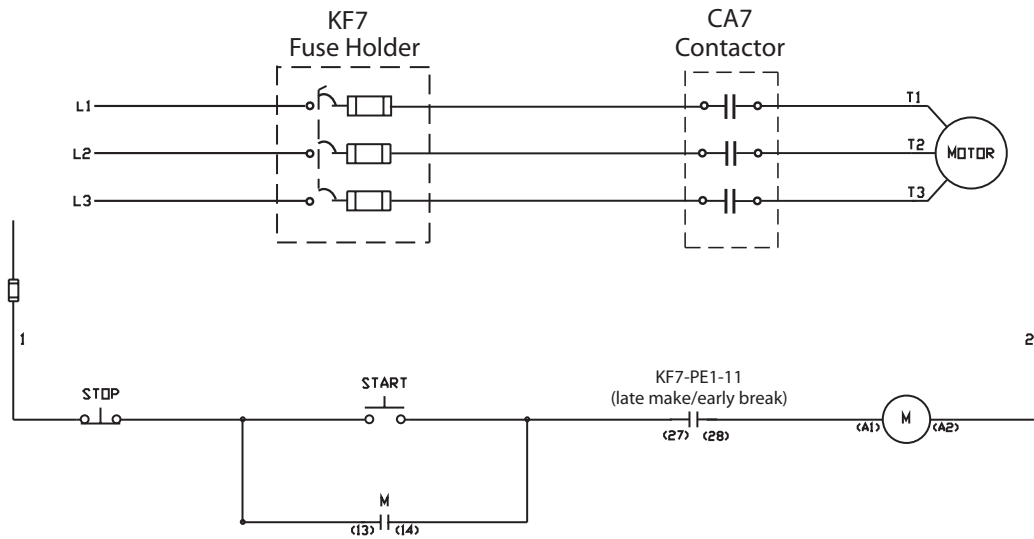

KF7 Fuse Holder used with KTA7 Motor Circuit Controller and CA7 Contactor

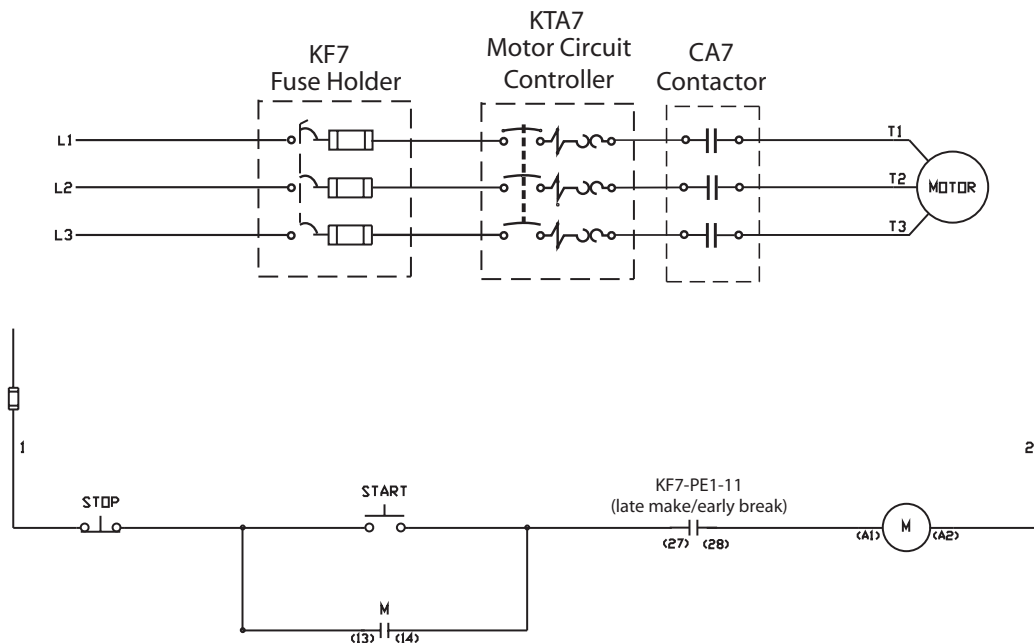


Series KTU7 UL489 Molded Case Circuit Breakers

DISCONTINUED

Sprecher+Schuh's KTU7 series of UL Molded Case Circuit Breakers are UL489 and CE listed for global applications. The current limiting circuit breaker provides fixed short circuit and overcurrent protection and offers high interrupting ratings for 2- and 3-pole devices from 0.5 to 30A. These Circuit breakers are 100% rated up to 10A.

Versatile, convenient and space saving... for a variety of applications

Accessories are intelligently designed to be field installed. The compact busbars and supply blocks reduce wiring errors and installation labor cost. Connection modules for the CA7 Contactors simplify wiring and can reduce the number of DIN rails required, compacting panel space even further.

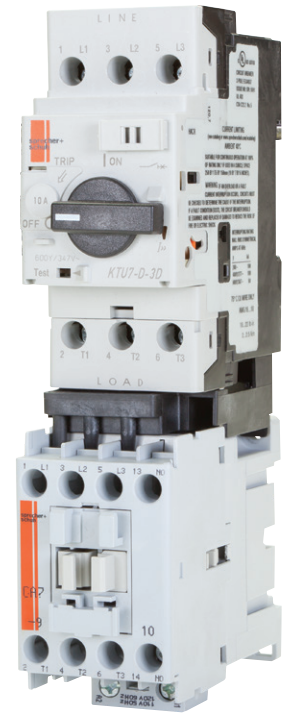

Advantages...

- Small foot print saves panel space, just 45 x 102 x 85 mm, up to 50% smaller than traditional MCCBs.
- Interrupt rating of 65kA at 480Y/277V may allow higher overall panel short circuit rating
- Up to 6 times higher interrupting rating vs. traditional miniature circuit breakers.



Ideal Applications...

- Feeder Circuits for small cabinets, distribution panels, branch circuit protection, transformers and heaters
- Control circuits for control circuit transformers and power supplies
- Industrial Heating applications
- Air conditioning and refrigeration applications

Compare these advanced features



F
KTU7 Molded Case Circuit Breakers

KTU7 Circuit Breaker, Fixed Thermal-Magnetic ②

| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number |
|---|-------------------|---------------------------------|-----------|--------------|-----------------|
| | | 240V | 480Y/277V | 600Y/347V | |
| KTU7-D — High Interrupting Capacity – 2-Pole | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-0.5 ① |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-1 ① |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-2 ① |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-3 ① |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-4 ① |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-5 ① |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-6 ① |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-8 ① |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-10 ① |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-12 |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-15 |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-20 |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-25 |
| 30.0 | 15...20xIn | 65 | 65 <td 25 | KTU7-D-2D-30 | |
| KTU7-D — High Interrupting Capacity – 3-Pole | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-0.5 ① |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-1 ① |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-2 ① |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-3 ① |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-4 ① |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-5 ① |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-6 ① |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-8 ① |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-10 ① |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-12 |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-15 |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-20 |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-25 |
| 30.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-30 |

Description

The KTU7 is a fixed trip, thermal-magnetic UL489 Molded Case Circuit Breaker.



KTU7-D-2D-10



KTU7-D-3D-10

F

KTU7 Molded Case Circuit Breakers


① Suitable for continuous operation at 100% of rating only if used in minimum enclosure space of 250 x 175 x 150 mm (10 x 7 x 6 in).
 ② KTU7 has independent thermal elements suitable for power distribution applications (not two slide bar differential tripping).

KT7 Accessories available for KTU7-D

| | | | |
|--|---|--|--|
|  | <p>KT7-PE1 or KT7-PEF1 Front Mount Auxiliaries and Trip Contacts See page F12</p> |  | <p>KT7-KN1, KT7-KRY1 or KT7-DS Lockable Twist Knob & Locking Tag See page F16</p> |
|  | <p>KT7-UA or KT7-AA Undervoltage Trips and Shunt Trips ❶ See page F14</p> |  | <p>Handle Assemblies KT7-SY or KT7-SB KT7-HTN or KT7-HTRY ❷ See page F15</p> |
|  | <p>KT7-HT/HTL, KT7-S_/N_ & KT7-SHS Extension Shafts & Support See page F15</p> |  | <p>KT7-45-AS Screw Adaptor See page F16</p> |

F


KTU7 Molded Case Circuit Breakers

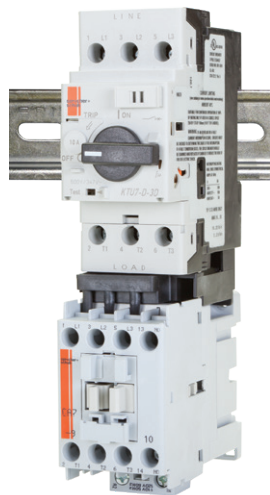

Remote Operation Application

The KTU7 3-Pole unit can be combined with CA7 using Connector Modules to achieve remote operation.

- For CA7-9...23 use KTU7-D-PEC23
- For CA7-9...43 use KTU7-D-PF

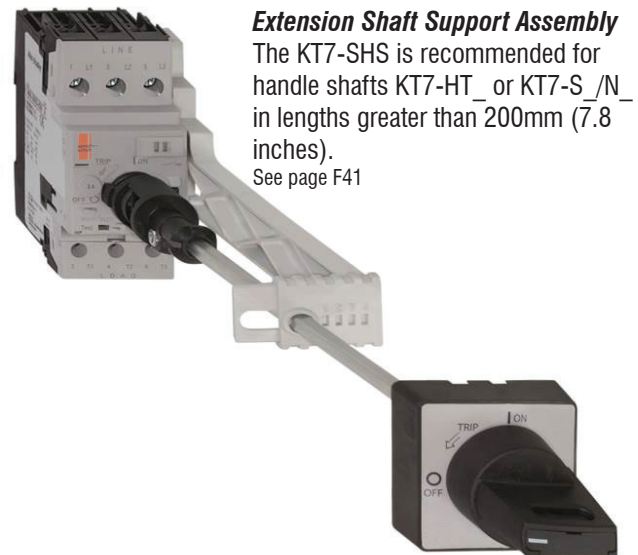

Extension Shaft Support Assembly



The KT7-SHS is recommended for handle shafts KT7-HT_ or KT7-S_/N_ in lengths greater than 200mm (7.8 inches).

See page F41

❶ Series B or later.
❷ Series E or later.

DISCONTINUED



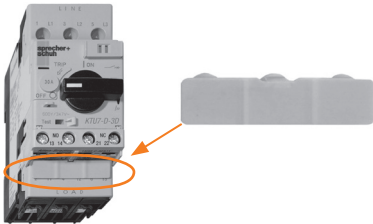
Connecting Modules (for connecting KTU7 to CA7 AC coil, or CA7 Electronic DC coil contactors)

| Module | Description | For Connecting. . . | To Contactor. . . | Catalog Number |
|---|---|---------------------|-------------------|-----------------------|
|  | Connecting Modules <ul style="list-style-type: none"> • 25 Amp maximum • Provides electrical and mechanical interconnection of KTU7 3-Pole and CA7 (with AC coils) or CA7- _E (with 12V or 24V Electronic DC coils) • KTU7 and Contactor mount on one DIN rail (see previous page for visual) | KTU7-D | CA7-9..23 | KTU7-D-PEC23 ❶ |
|  | Flexible Connecting Module <ul style="list-style-type: none"> • 32 Amp maximum • Provides electrical and mechanical interconnection of KTU7 and CA7 (with AC coils) or CA7- _E (with 12V or 24V Electronic DC coils) • Contactor and KTU7 separately mounted | KTU7-D | CA7-9..43 | KTU7-D-PF ❶ |

F

KTU7 Molded Case Circuit Breakers

Compact Busbar System for KTU7-D
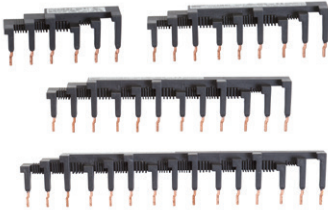
| Accessory | Description | For Use With | Catalog Number |
|---|---|--------------|--|
|  | Compact Busbar — 45 mm Spacing (Rated 64 A) <ul style="list-style-type: none"> • For use with front-mounted auxiliary contact Connects 2-KTU7s Connects 3-KTU7s Connects 4-KTU7s Connects 5-KTU7s (shown) | KTU7-D-3D ❶ | KTU7-D-DB-45-2 KTU7-D-DB-45-3 KTU7-D-DB-45-4 KTU7-D-DB-45-5 |
|  | Supply Block and Terminal <ul style="list-style-type: none"> • For power connection to Compact Busbar — 600V, KTU7-D...120A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source • Compliant with UL489 Terminal Clearance standards | KTU7-D-3D ❶ | KTU7-D-A3E |
|  | Load Terminal Cover <ul style="list-style-type: none"> • For UL 489 compliance of front mounted auxiliary contacts when installed on KTU7 • The cover packaged in quantities of 10 (must order 10 for one package of 10) | KTU7 | KT7-PEFC |

❶ For use with KTU7 3-pole Circuit Breakers only.

Application Rating Chart

| KTU7 | High Fault SCCR | | | Switching Lighting Rated | | |
|---------------|-----------------|-------------------|-------------------|--------------------------|----------------------------|--------------|
| | Combined with ❶ | 480Y/277 VAC (KA) | 600Y/347 VAC (KA) | Fluorescent ❷ | High-intensity Discharge ❸ | HVAC Rated ❹ |
| KTU7-D-2D-0.5 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-1 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-2 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-3 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-4 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-5 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-6 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-8 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-10 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-12 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-15 | CA7-9...23 | 65 | 35 | SWD | HID | HARC |
| KTU7-D-2D-20 | CA7-9...23 | 65 | 35 | SWD | HID | HARC |
| KTU7-D-2D-25 | CA7-9...30 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-2D-30 | CA7-9...30 | 65 | 35 | ~ | ~ | HARC |
| KTU7-D-3D-0.5 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-1 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-2 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-3 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-4 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-5 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-6 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-8 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-10 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-12 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-15 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-20 | CA7-9...23 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-25 | CA7-9...30 | 65 | 35 | ~ | HID | HARC |
| KTU7-D-3D-30 | CA7-9...30 | 65 | 35 | ~ | HID | HARC |

IEC Performance Data

(CSA C22.2, UL 489, IEC / EN 60947-1, -2 in connection with a short-circuit protection device)

| | | KTU7-D- 2 pole & 3 pole | | | | | | | | | | | | | |
|---------------------------------|-----|-------------------------|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| | | 0.5A | 1A | 2A | 3A | 4A | 5A | 6A | 8A | 10A | 12A | 15A | 20A | 25A | 30A |
| Rated Operational Current I_n | [A] | 0.5 | 1 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 15 | 20 | 25 | 30 |
| Fixed Thermal Trip $I_t = I_n$ | [A] | 0.5 | 1 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 15 | 20 | 25 | 30 |
| Fixed Magnetic Trip $I_m =$ | [A] | 15...20 x I_n | | | | | | | | | | | | | |

Ultimate Short Circuit

| Breaking Capacity (50 Hz) I_{cu} | | 0.5A | 1A | 2A | 3A | 4A | 5A | 6A | 8A | 10A | 12A | 15A | 20A | 25A | 30A |
|------------------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 230...240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400...415V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 65 | 65 | 65 | 65 | 65 |
| 525V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 |
| 690V | [kA] | 50 | 50 | 18 | 18 | 18 | 18 | 18 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |

Rated Service Short Circuit
Breaking Capacity (50 Hz) I_{cs}










| | | 0.5A | 1A | 2A | 3A | 4A | 5A | 6A | 8A | 10A | 12A | 15A | 20A | 25A | 30A |
|------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 230...240V | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 400...415V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 50 | 50 |
| 525V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 25 | 25 |
| 690V | [kA] | 50 | 50 | 10 | 10 | 10 | 10 | 10 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |






- ❶ KTU7 + CA7-9...23 contactor maybe combined with CEP7 overload. SCCR ratings remain unchanged.
- ❷ KTU7 circuit breaker intended to switch fluorescent lighting on a regular basis. Selection of sizes limited by UL489. Devices marked with "SWD".
- ❸ KTU7 Circuit Breakers intended to switch high-intensity discharge (ballast) lighting devices marked with "HID".
- ❹ Rated for use with heating, air conditioning, refrigeration. Devices marked with "HARC".

General Data


| | | KTU7-D |
|---|---|--|
| Number of Poles | | 2 and 3 |
| Rated Insulation Voltage U_i | | |
| IEC, / EN | [V] | 600 |
| UL, CSA | [V] | 600 |
| Ratings | | HACR |
| Suitable for continuous operation at 100% of rating only if used in enclosure space for | | 0.5...15 A, enclosure space 250 x 175 x 150 mm (10 x 7 x 6 in) |
| Rated Impulse Withstand Voltage U_{imp} | | |
| Pollution degree | | 3 |
| Main circuits U _{imp} /Overvoltage Category | | 6 kV/III |
| Auxiliary circuits U _{imp} /Overvoltage Category | | 6 kV/III |
| Safe separation between main and auxiliary circuits | | up to 400V |
| Rated Frequency | [Hz] | 50/60 |
| Utilization Category | | |
| • IEC 60947-2 (Circuit Breaker) | | A |
| Life Span | | |
| Mechanical | [operations] | 100,000 |
| Electrical (I _e max.) | [operations] | 10,000 |
| Switching Frequency | [operations/h] | max. 25 |
| Ambient Temperature | | |
| Storage | [°C] | -40...+80 |
| Operation | [°C] | -25...+60 (70 with 15% I _n current reduction) |
| Resistance to Climatic Change | | |
| Moisture / Heat Resistance | (600068-2-30) | 23 °C / 83 % relative humidity and 40 °C / 92 % relative humidity, 56 cycles |
| Dry Heat | (60086-2-2) | 100 °C, relative humidity <50 %, 7 days |
| Moisture / Change Resistance | (60086-2-3) | 40 °C, relative humidity 93 %, 56 days |
| Site Altitude | [m] | to 2000 N.N. |
| Protection Class | | IP2X, when wired |
| Resistance to Shock | Transport (60068-2-27) | 30 g, 11 ms, all axes |
| Resistance to Vibration | Operation (60068-2-6) | 18 g |
| Overload Protection | | |
| Phase-loss protection | | No phase loss protection |
| Short circuit protection (Magnetic) | | Fixed setting 10...20 x I _n |
| Main Disconnect Switch Application | | Yes, with accessories |
| For utilization outside North America, Assemblies (of products) shall comply to the IEC61439-1 requirements | | |
| Application Conditions | KTU7 circuit breakers are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments. | |
| Standards | UL489; CSA C22.2 No. 5; IEC / EN 60947-1, -2 | |
| Certifications | CE; cULus listed Circuit Breaker, File No. E334037 and E33916 (accessories) | |

Terminal Specifications

| | | KTU7-D | |
|---|--------------|---|-------------------|
| Terminal Parts | |  | |
| Terminal Type | | Pozidrive No. 2 / Blade No. 3 | |
| Screwdriver | | Pozidrive No. 2 / Blade No. 3 | |
|  | 1. conductor | [mm ²]/[AWG] | 1...6/— |
|  | 2. conductor | [mm ²]/[AWG] | 1...4/— |
|  | 1. conductor | [mm ²]/[AWG] | 1...6/— |
|  | 2. conductor | [mm ²]/[AWG] | 1...6/— |
|  | 1. conductor | [mm ²]/[AWG] | —/No. 18...10 |
|  | 2. conductor | [mm ²]/[AWG] | —/No. 18...10 |
|  | 1. conductor | [mm ²]/[AWG] | 1...6/No. 18...10 |
|  | 2. conductor | [mm ²]/[AWG] | 1...6/No. 18...10 |
| Tightening Torque | | [N•m] [lb•in] | 2...2.5/18...22 |
| Weight | | [g] | 395 |

| | | KTU7-D-A3E | |
|---|--------------|--------------------------|-----------------|
| Use 75 °C Cu wire only | | | |
| Rated Thermal Current I_{th} | | [A] | 64 |
|  | 1. conductor | [mm ²]/[AWG] | 2.5...25/14...4 |
|  | 1. conductor | [mm ²]/[AWG] | 2.5...25/14...4 |
|  | 1. conductor | [mm ²]/[AWG] | 2.5...25/14...4 |
|  | 1. conductor | [mm ²]/[AWG] | 2.5...25/14...4 |
|  | 1. conductor | [mm ²]/[AWG] | 2.5...25/14...4 |
| Tightening Torque | | [N•m] [lb•in] | 3...3.5/27...31 |

Time-Current Characteristic

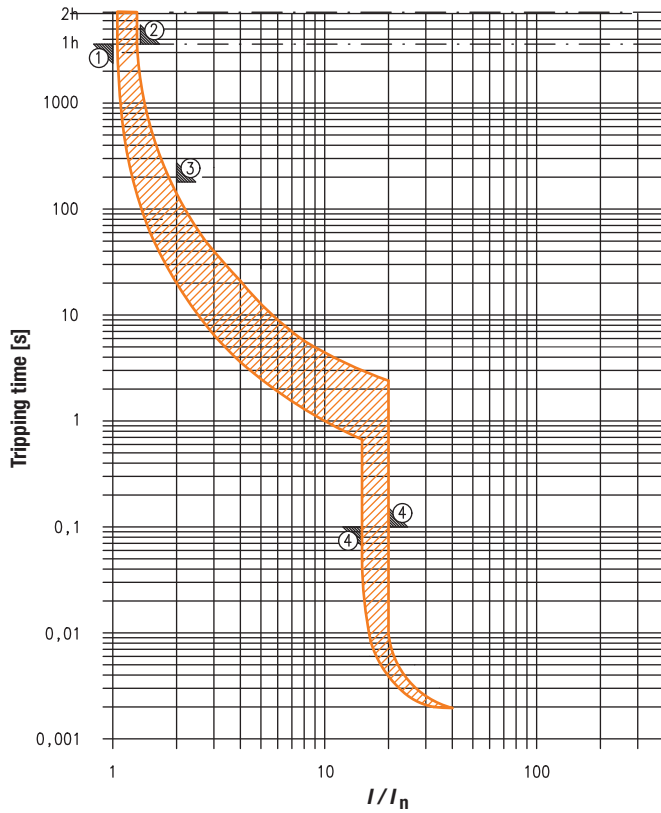


Tripping characteristic acc. to UL 489 and IEC 60947-2

- ① conventional non-tripping current $I_{nt} = 1.0 I_n$
- ② conventional tripping current $I_t = 1.35 I_n : t = < 1h$
- ③ $2.0 I_n : t = 180s \text{ max.}$


Instantaneous tripping acc. to UL 489 and IEC 60947-2

- ④ Trip Curve : $15 \dots 20 I_n$

Maximum Cut-off (Let-Through) Current

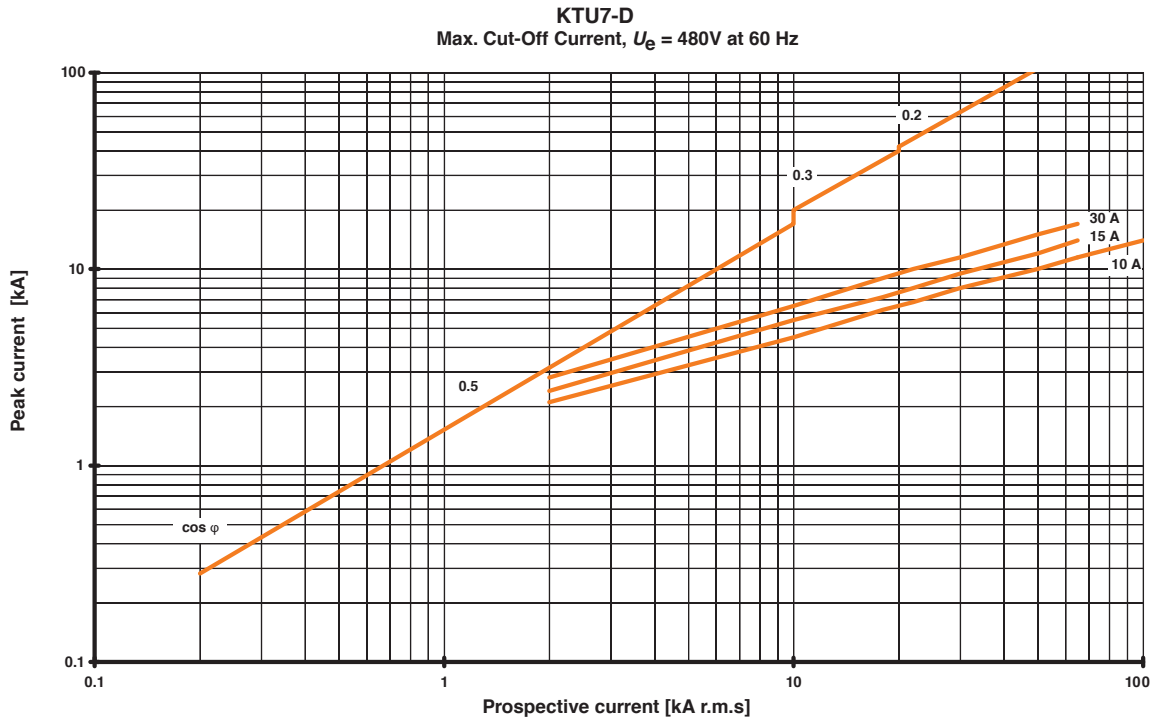

Maximum Let-Through Energy

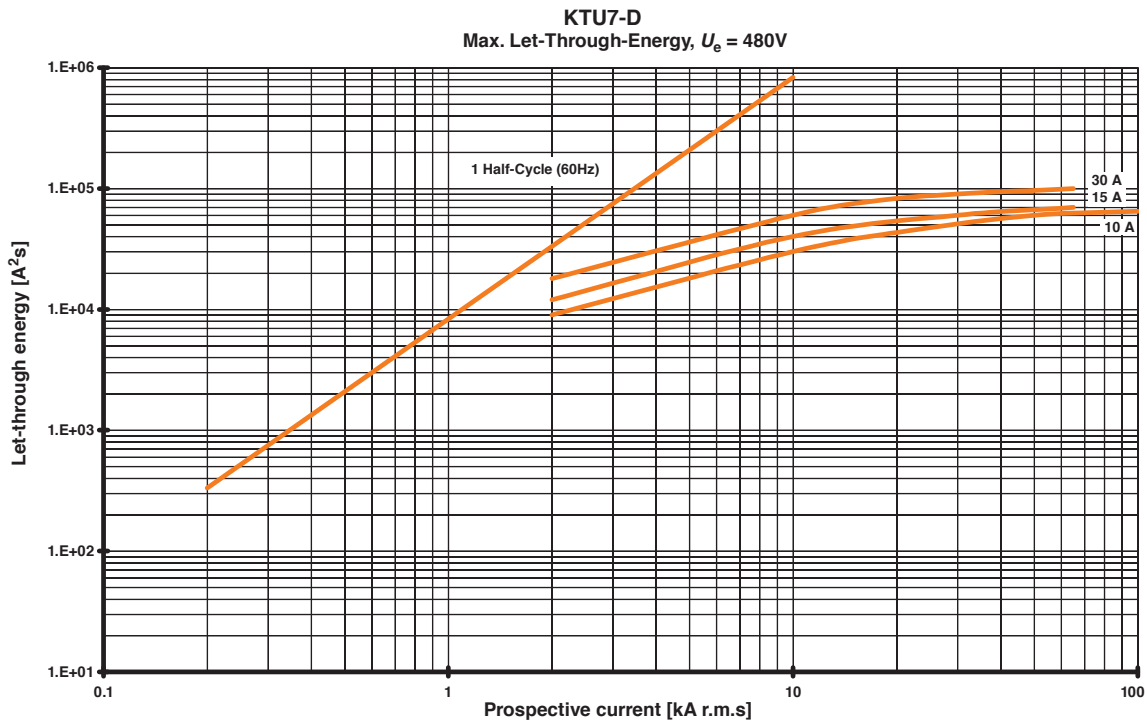


F


KTU7 Molded Case Circuit Breakers

KTU7-D Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

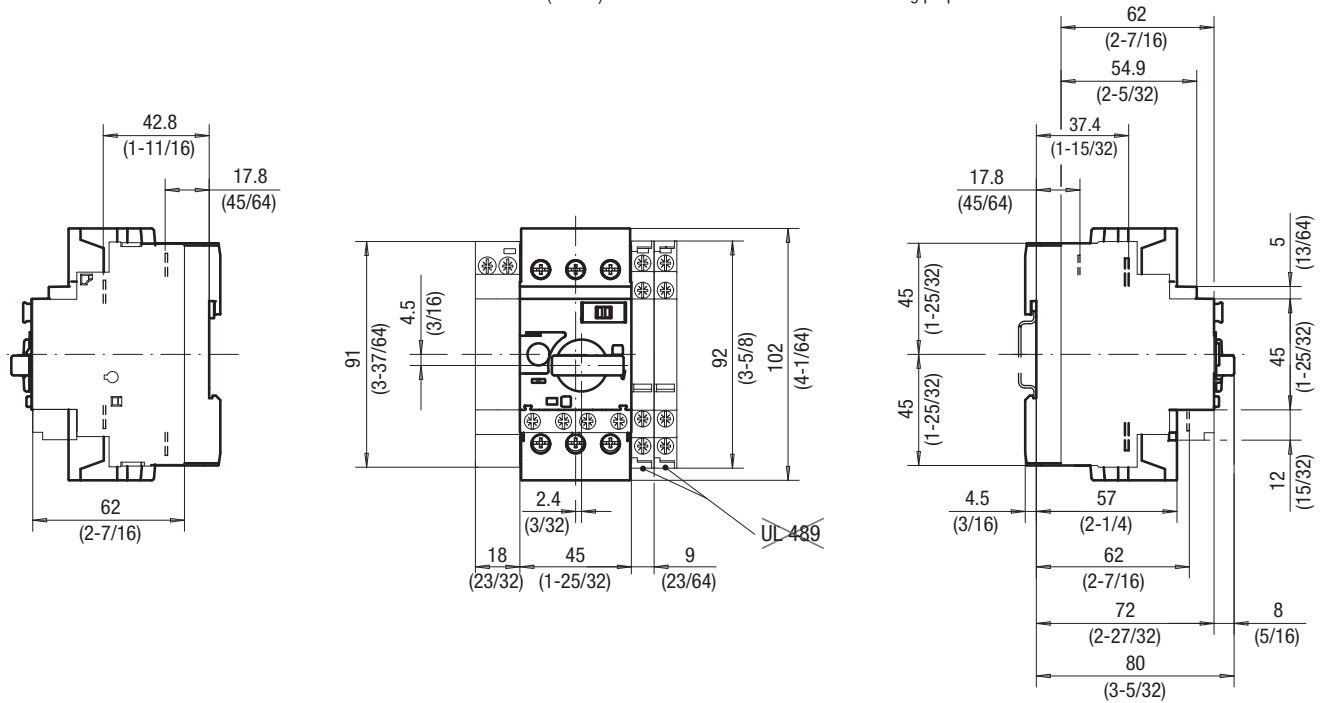


KTU7 Circuit Breaker Enclosure Requirements

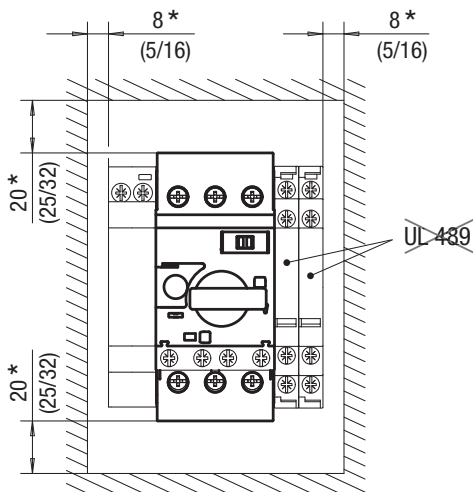


*) - Minimum distance to grounded parts or walls

KTU7 Wiring Diagram

**3-Phase
KTU7-D-3**

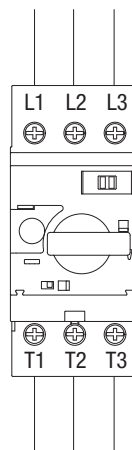


**2-Phase
KTU7-D-2**

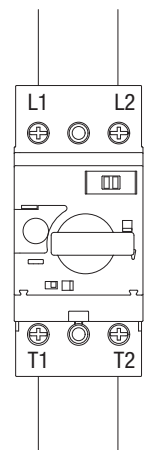


F
KTU7 Molded Case Circuit Breakers


KTU7 with Busbar

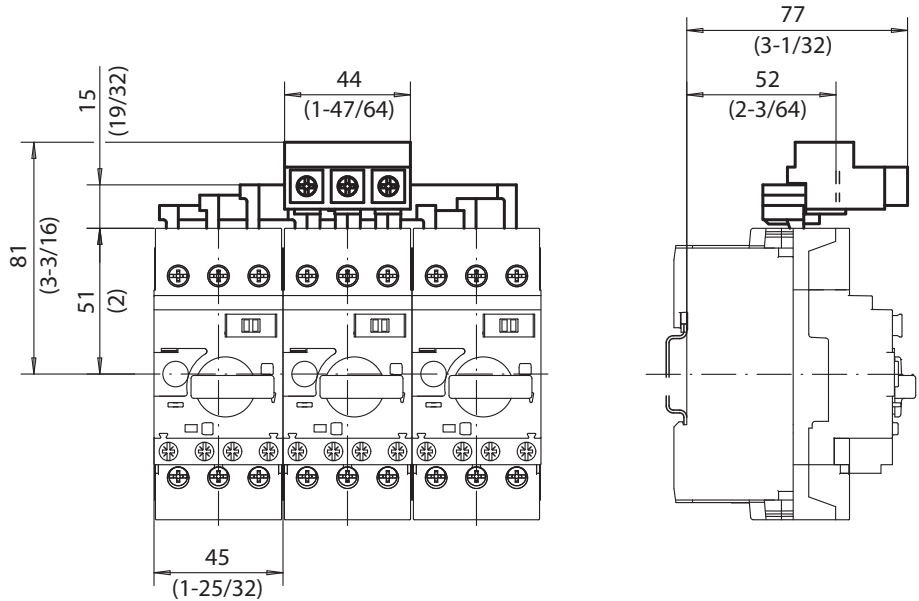

KTU7 with Screw Adaptor KT7-45-AS

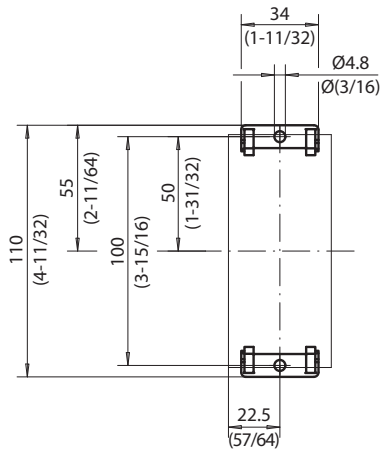

KTU7 Mounting Position

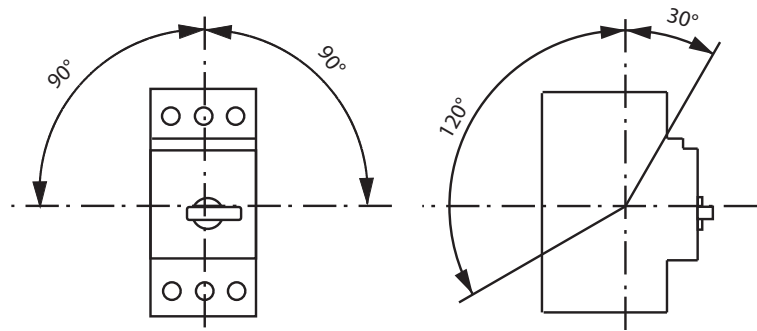

F

KTU7 Molded Case Circuit Breakers


Ecombo and EcomboPlus Starters

Save space, save money in individual or multi-motor starter applications

Sprecher + Schuh's Ecombo and EcomboPlus starters are the compact alternative to larger and higher priced combination starters. Both models consist of a KTA7 Motor Circuit Controller (cULus listed as a Type E, self-protected combination starter), assembled with a CA7 or CA8 contactor, which provides remote operation (Type E/F). Whether used as a standalone starter or in multi-motor starter applications, Ecombo and EcomboPlus starters save significant panel space and dollars over conventional combination starter alternatives.

Control and protection for most industrial applications

The Ecombo starter line covers motors to 45 amperes, while providing current limiting short circuit protection up to 65kA. Class 10 thermal overload protection is also assured with a very accurate current adjustment setting which is factory calibrated to the smallest and largest current the unit can handle. A "differential tripping" mechanism also provides acceleration tripping under single phase conditions (see illustration on page 110). Ecombo starters may be selected as Type 2 Coordinated per IEC 60947-4-1, or UL Construction Type E or F.

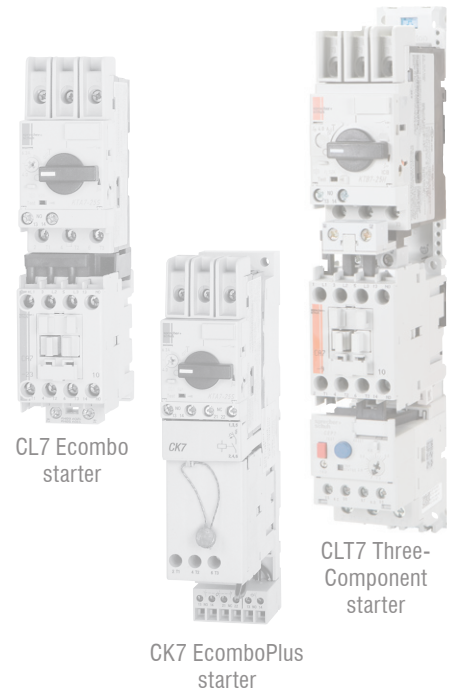

See our online white paper

Methods of Applying

KT7

Motor Circuit Controllers




Section Obsolete - F1.40 - F1.55
See pages

EcomboPlus... the complete solution

The EcomboPlus starter (CK7) is factory assembled on a special socket base that provides support and allows the starter to be mounted on one or two DIN-rails or screw mounted. Each starter comes standard with a front mounted auxiliary trip contact that is pre-wired to a built-in terminal block at the bottom of the unit. Contactor coil connections are also at the bottom of the starter to provide attractive and cost effective panel wiring.

Reduce panel size, complexity and cost

Because KT7 Motor Circuit Controllers are UL listed as self-protected combination starters, NEC / CEC group motor rules are simplified substantially. In many cases, only a non-fused switch is required for panel disconnect. See our online white paper "Methods of Applying KT7 Motor Circuit Controllers", which explains applying KT7s in multi-motor starter applications.

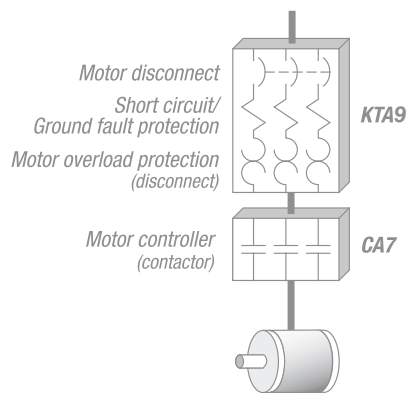

The Ecombo starter...

Ecombo starters (CL7) come standard with a KTA7 Motor Circuit Controller connected to Sprecher + Schuh's CA7 contactor (or CA8 mini contactor) through a specially designed connection module. The unit is DIN-rail mounted. Contactor coil connections are at the bottom of the starter to provide attractive and cost effective panel wiring. Ecombo starters may also be purchased with just three parts and assembled by the user to further increase economy. The CLT7 is a three component starter with a KTB7 controller, CA7 contactor, and a CEP7 solid state overload relay, pre-assembled on a bus bar module and ready to mount to a DIN rail or panel.

The Ecombo starter line combines a KTA7 self-protected Type E combination controller with a CA7 contactor to form a cost effective compact Type E/F alternative to traditional combination starters.

F

Ecombo Circuit Controllers

| Starter Type | | Contactor Series | Auxiliary Contact | Control Voltage* | | |
|------------------------------------|-------------------------|-------------------|-------------------|---------------------|-------------|-----------------------------------|
| <u>EcomboPlus Starter with CA7</u> | | | | <u>Series CA7</u> ① | | <u>Code</u> |
| CK7 | 2 component DOL Starter | 9(E) | 01 | 1 NC | 24Z | 24V 50/60Hz |
| CKU7 | 2 component REV Starter | 12(E) | 10 | 1 NO | 120 | 110V 50Hz / 120V 60Hz |
| <u>Ecombo Starter with CA7</u> | | 16(E) | 11 | 1 NO + 1 NC | 220W | 200...220V 50Hz / 208...240V 60Hz |
| CL7 | 2 component DOL Starter | 23(E) | 02 | 2 NC | 277 | 240V 50Hz / 277V 60Hz |
| CLU7 | 2 component REV Starter | 30(E) | 22 | 2 NO + 2 NC | 480 | 440V 50Hz / 480V 60Hz |
| CLT7 | 3 component DOL Starter | 37(E) | | | 600 | 550V 50Hz / 600V 60Hz |
| CLUT7 | 3 component REV Starter | 43(E) | | | | |
| <u>Ecombo Starter with CA8</u> | | <u>Series CA8</u> | | | <u>Code</u> | <u>DC Voltage</u> |
| CL8 | 2 component DOL Starter | 9(C) | | | 12D(E) | 12V |
| CLU8 | 2 component REV Starter | 12(C) | | | 24D(E) | 24V |
| | | | | | 48D(E) | 48V |
| | | | | | 110D(E) | 110V |
| | | | | | 220D(E) | 220V |

* Other control voltages available
(E) designates Electronic DC Coils

This illustration is for reference only.

Section Obsolete
See pages F1.40 - F1.55

Turn to the appropriate page to determine specific catalog number

| Circuit Breaker Type | Adj. Range | Auxiliaries + Trip Contacts | Option(s) |
|------------------------------------|---------------------------|--|--|
| <u>KT...Z</u> | 0.16A 0.1...0.16A | X No auxiliary contacts | For complete listing of Option Codes , refer to Modifications page in this section. |
| A... Motor Protection | 0.25A 0.16...0.25A | Front Mounted Auxiliaries | |
| B... Starter Protection | 0.4A 0.25...0.4A | A10 Aux. Contact 1 NO | |
| C... High Inrush Protection | 0.63A 0.4...0.63A | A01 Aux. Contact 1 NC | |
| ...S Standard Performance | 1A 0.63...1.0A | A11 Aux. Contact 1 NO + 1 NC | |
| ...H High Performance | 1.6A 1.0...1.6A | A20 Aux. Contact 2 NO | |
| | 2.5A 1.6...2.5A | T10A01 1 NO Short Circuit or Overload + 1 NC Aux. Contact | |
| | 4A 2.5...4.0A | T10A10 1 NO Short Circuit or Overload + 1 NO Aux. Contact | |
| | 6.3A 4.0...6.3A | Side Mounted Auxiliaries | |
| | 10A 6.3...10A | AS11 Aux. Contact 1 NO + 1 NC | |
| | 16A 10...16A | AS20 Aux. Contact 2 NO | |
| | 20A 16...20A | R10 1 NC Short Circuit or Overload + 1 NO Aux. Contact | |
| | 25A 20...25A | R11 1 NC Short Circuit or Overload + 1 NC Aux. Contact | |
| | 32A 25...32A | | |
| | 45A 32...45A | | |

① (D & E) designations indicate DC coil.

Non-Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|---------|--------------------------|-------|-------|-------|----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1M | ~ | ~ | ~ | ~ | CL8-09-10-*AS0.16A-X |
| 0.16...0.25 | 3.3 | 2M | ~ | ~ | ~ | ~ | CL8-09-10-*AS0.25A-X |
| 0.25...0.40 | 5.2 | 3M | ~ | ~ | ~ | ~ | CL8-09-10-*AS0.4A-X |
| 0.40...0.63 | 8.2 | 4M | ~ | ~ | ~ | ~ | CL8-09-10-*AS0.63A-X |
| 0.63...1 | 13 | 5M | ~ | ~ | ~ | 1/2 | CL8-09-10-*AS1A-X |
| 1...1.6 | 21 | 6M | ~ | ~ | 1/2 | 3/4 | CL8-09-10-*AS1.6A-X |
| 1.6...2.5 | 33 | 7M | 1/2 | 1/2 | 1 | 1-1/2 | CL8-09-10-*AS2.5A-X |
| 2.5...4 | 52 | 8M | 3/4 | 3/4 | 2 | 3 | CL8-09-10-*AS4A-X |
| 4...6.3 | 82 | 9M | 1 | 1-1/2 | 3 | ~ | CL8-09-10-*AS6.3A-X |
| 6.3...10 | 130 | 10M | 2 | 2 | 5 | ~ | CL8-09-10-*AS10A-X |
| 6.3...10 | 130 | 11M | ~ | 3 | ~ | ~ | CL8-12-10-*AS10A-X |
| 10...16 | 208 | 12M | 3 | ~ | 7-1/2 | ~ | CL8-12-10-*AS16A-X |



Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Can mount on one DIN-rail

Non-Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|---------|--------------------------|-------|-------|-------|-----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1M | ~ | ~ | ~ | ~ | CL8-09C-10-*AS0.16A-X |
| 0.16...0.25 | 3.3 | 2M | ~ | ~ | ~ | ~ | CL8-09C-10-*AS0.25A-X |
| 0.25...0.40 | 5.2 | 3M | ~ | ~ | ~ | ~ | CL8-09C-10-*AS0.4A-X |
| 0.40...0.63 | 8.2 | 4M | ~ | ~ | ~ | ~ | CL8-09C-10-*AS0.63A-X |
| 0.63...1 | 13 | 5M | ~ | ~ | ~ | 1/2 | CL8-09C-10-*AS1A-X |
| 1...1.6 | 21 | 6M | ~ | ~ | 1/2 | 3/4 | CL8-09C-10-*AS1.6A-X |
| 1.6...2.5 | 33 | 7M | 1/2 | 1/2 | 1 | 1-1/2 | CL8-09C-10-*AS2.5A-X |
| 2.5...4 | 52 | 8M | 3/4 | 3/4 | 2 | 3 | CL8-09C-10-*AS4A-X |
| 4...6.3 | 82 | 9M | 1 | 1-1/2 | 3 | ~ | CL8-09C-10-*AS6.3A-X |
| 6.3...10 | 130 | 10M | 2 | 2 | 5 | ~ | CL8-09C-10-*AS10A-X |
| 6.3...10 | 130 | 11M | ~ | 3 | ~ | ~ | CL8-12C-10-*AS10A-X |
| 10...16 | 208 | 12M | 3 | ~ | 7-1/2 | ~ | CL8-12C-10-*AS16A-X |

Section Obsolete
See pages F1.40 - F1.55

AC Coil Codes ③

| AC Coil Code | Voltage Range | |
|--------------|-------------------|-----------|
| | 50 Hz | 60 Hz |
| 12 | 12V | 12V |
| 24Z | 24V | 24V |
| 48Z | 48V | 48V |
| 120 | 110V | 120V |
| 208 | 200V-220V | 200V-220V |
| 240 | 240V | 240V |
| 380 ⑥ | Use Coil Code 400 | |
| 400 ⑥ | 400V | 400V |
| 480 | 440V | 480V |
| 575 ⑥ | Use Coil Code 600 | |
| 600 ⑥ | 525V | 600V |

DC Coil Codes ③

| DC Coil Code | Voltage |
|--------------|---------|
| 12D | 12V |
| 24D | 24V ④ |
| 110D | 110V |
| 125D | 125V |
| 220D | 220V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.


Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
- ③ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
- ④ Integrated surge suppressor for coil is available. See page F69 for options.
- ⑤ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
- ⑥ Use this code for 575V applications.

Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Index ❶ | Typical Three Phase [HP] | | | | Catalog Number ❷ |
|---|-------------------|---------|--------------------------|-------|-------|-------|-----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1M | ~ | ~ | ~ | ~ | CLU8-09-02-*AS0.16A-X |
| 0.16...0.25 | 3.3 | 2M | ~ | ~ | ~ | ~ | CLU8-09-02-*AS0.25A-X |
| 0.25...0.40 | 5.2 | 3M | ~ | ~ | ~ | ~ | CLU8-09-02-*AS0.4A-X |
| 0.40...0.63 | 8.2 | 4M | ~ | ~ | ~ | ~ | CLU8-09-02-*AS0.63A-X |
| 0.63...1 | 13 | 5M | ~ | ~ | ~ | 1/2 | CLU8-09-02-*AS1A-X |
| 1...1.6 | 21 | 6M | ~ | ~ | 1/2 | 3/4 | CLU8-09-02-*AS1.6A-X |
| 1.6...2.5 | 33 | 7M | 1/2 | 1/2 | 1 | 1-1/2 | CLU8-09-02-*AS2.5A-X |
| 2.5...4 | 52 | 8M | 3/4 | 3/4 | 2 | 3 | CLU8-09-02-*AS4A-X |
| 4...6.3 | 82 | 9M | 1 | 1-1/2 | 3 | ~ | CLU8-09-02-*AS6.3A-X |
| 6.3...10 | 130 | 10M | 2 | 2 | 5 | ~ | CLU8-09-02-*AS10A-X |
| 6.3...10 | 130 | 11M | ~ | 3 | ~ | ~ | CLU8-12-02-*AS10A-X |
| 10...16 | 208 | 12M | 3 | ~ | 7-1/2 | ~ | CLU8-12-02-*AS16A-X |

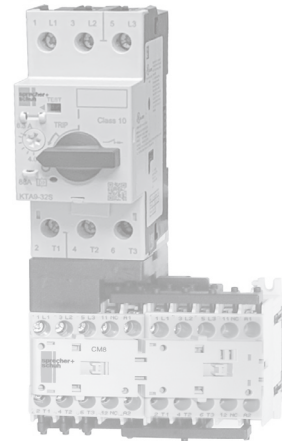

Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8) Connecting Module (Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

| Thermal Trip [A] | Magnetic Trip [A] | Index ❶ | Typical Three Phase [HP] | | | | Catalog Number ❷ |
|---|-------------------|---------|--------------------------|-------|-------|-------|------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1M | ~ | ~ | ~ | ~ | CLU8-09C-02-*AS0.16A-X |
| 0.16...0.25 | 3.3 | 2M | ~ | ~ | ~ | ~ | CLU8-09C-02-*AS0.25A-X |
| 0.25...0.40 | 5.2 | 3M | ~ | ~ | ~ | ~ | CLU8-09C-02-*AS0.4A-X |
| 0.40...0.63 | 8.2 | 4M | ~ | ~ | ~ | ~ | CLU8-09C-02-*AS0.63A-X |
| 0.63...1 | 13 | 5M | ~ | ~ | ~ | 1/2 | CLU8-09C-02-*AS1A-X |
| 1...1.6 | 21 | 6M | ~ | ~ | 1/2 | 3/4 | CLU8-09C-02-*AS1.6A-X |
| 1.6...2.5 | 33 | 7M | 1/2 | 1/2 | 1 | 1-1/2 | CLU8-09C-02-*AS2.5A-X |
| 2.5...4 | 52 | 8M | 3/4 | 3/4 | 2 | 3 | CLU8-09C-02-*AS4A-X |
| 4...6.3 | 82 | 9M | 1 | 1-1/2 | 3 | ~ | CLU8-09C-02-*AS6.3A-X |
| 6.3...10 | 130 | 10M | 2 | 2 | 5 | ~ | CLU8-09C-02-*AS10A-X |
| 6.3...10 | 130 | 11M | ~ | 3 | ~ | ~ | CLU8-12C-02-*AS10A-X |
| 10...16 | 208 | 12M | 3 | ~ | 7-1/2 | ~ | CLU8-12C-02-*AS16A-X |

Section Obsolete
See pages F1.40 - F1.55

AC Coil Codes ❸

| AC Coil Code | Voltage Range | |
|--------------|-------------------|-----------|
| | 50 Hz | 60 Hz |
| 12 | 12V | 12V |
| 24Z | 24V | 24V |
| 48Z | 48V | 48V |
| 120 | 110V | 120V |
| 208 | 200V-220V | 200V-220V |
| 240 | 240V | 240V |
| 380 ❹ | Use Coil Code 400 | |
| 400 ❹ | 400V | 400V |
| 480 | 440V | 480V |
| 575 ❺ | Use Coil Code 600 | |
| 600 ❺ | 525V | 600V |

DC Coil Codes ❸

| DC Coil Code | Voltage |
|--------------|---------|
| 12D | 12V |
| 24D | 24V ❹ |
| 110D | 110V |
| 125D | 125V |
| 220D | 220V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
- ❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
- ❹ Integrated surge suppressor for coil is available. See page F69 for options.
- ❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
- ❻ Use this code for 575V applications.

F Ecombo Circuit Controllers

Non-Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ③

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ②⑥ |
|--|-------------------|---------|--------------------------|---------|------|---------|---------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CL7-9-10-*-AS0.16A-A10 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CL7-9-10-*-AS0.25A-A10 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CL7-9-10-*-AS0.4A-A10 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CL7-9-10-*-AS0.63A-A10 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CL7-9-10-*-AS1A-A10 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CL7-9-10-*-AS1.6A-A10 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CL7-9-10-*-AS2.5A-A10 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CL7-9-10-*-AS4A-A10 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 | CL7-9-10-*-AS6.3A-A10 ⑤ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑤ | CL7-12-10-*-AS10A-A10 ⑤ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑤ | CL7-16-10-*-AS16A-A10 ⑤ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑤ | CL7-23-10-*-AS20A-A10 ⑤ |
| 18.5...25 | 325 | 16 | 5 ⑤ | 7-1/2 ⑤ | 15 ⑤ | 20 ⑤ | CL7-23-10-*-AS25A-A10 ⑤ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CL7-9-10-*-AH2.5A-A10 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CL7-9-10-*-AH4A-A10 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CL7-9-10-*-AH6.3A-A10 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CL7-12-10-*-AH10A-A10 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CL7-16-10-*-AH16A-A10 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 ⑤ | CL7-23-10-*-AH20A-A10 ⑤ |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 ⑤ | CL7-23-10-*-AH25A-A10 ⑤ |
| KTA7-45H — High Interrupting Capacity ④ | | | | | | | |
| 6.3...10 | 130 | 36 | 2 | 3 | 5 | 7-1/2 | CL7-30-10-*-AH10A-A10-W |
| 10...16 | 208 | 37 | 3 | 5 | 10 | 10 | CL7-30-10-*-AH16A-A10-W |
| 14.5...20 | 260 | 38 | 5 | 5 | 15 | 15 | CL7-30-10-*-AH20A-A10-W |
| 18...25 | 325 | 39 | 7-1/2 | 10 | 15 | 20 | CL7-30-10-*-AH25A-A10-W |
| 23...32 | 416 | 41 | 7-1/2 | 10 | 20 | 25 | CL7-30-10-*-AH32A-A10-W |
| 32...45 | 585 | 45 | 10 | 10 | 25 | 30 | CL7-37-10-*-AH45A-A10-W |
| 32...45 | 585 | 46 | 10 | 15 | 25 | 30 | CL7-43-11-*-AH45A-A10-W ④ |



CL7-16-10-AS16A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (AC)
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ③

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.



Section Obsolete See pages F1.40 - F1.55

For applications above 45 amps please consider a type combination starters on page C59.

Coil Codes (*) ②

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 | 400-415V | ~ |
| 480 ⑤ | 440V | 480V |
| 600 ⑤ | 550V | 600V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Other voltages available, see Section A in this catalog.
- ③ CL7-30...43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add -W to end of catalog number. See page F69 for modifications.
- ④ CL7-43 supplied with (1) NO and (1) NC front mount auxiliary.
- ⑤ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
- ⑥ Suffix -A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix -A10 to -AS11 (example CL7-9-10-*-AS0.16A-AS11) See options on page F69.

Non-Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ③

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|---------|--------------------------|---------|------|---------|-------------------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CL7-9E-10- <i>*</i> -AS0.16A-A10 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CL7-9E-10- <i>*</i> -AS0.25A-A10 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CL7-9E-10- <i>*</i> -AS0.4A-A10 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CL7-9E-10- <i>*</i> -AS0.63A-A10 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CL7-9E-10- <i>*</i> -AS1A-A10 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CL7-9E-10- <i>*</i> -AS1.6A-A10 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CL7-9E-10- <i>*</i> -AS2.5A-A10 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CL7-9E-10- <i>*</i> -AS4A-A10 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 ⑥ | CL7-9E-10- <i>*</i> -AS6.3A-A10 ⑥ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑥ | CL7-12E-10- <i>*</i> -AS10A-A10 ⑥ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑥ | CL7-16E-10- <i>*</i> -AS16A-A10 ⑥ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑥ | CL7-23E-10- <i>*</i> -AS20A-A10 ⑥ |
| 18.5...25 | 325 | 16 | 5 ⑥ | 7-1/2 ⑥ | 15 ⑥ | 20 ⑥ | CL7-23E-10- <i>*</i> -AS25A-A10 ⑥ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CL7-9E-10- <i>*</i> -AH2.5A-A10 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CL7-9E-10- <i>*</i> -AH4A-A10 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CL7-9E-10- <i>*</i> -AH6A-A10 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CL7-12E-10- <i>*</i> -AH10A-A10 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CL7-16E-10- <i>*</i> -AH16A-A10 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 ⑥ | CL7-23E-10- <i>*</i> -AH20A-A10 ⑥ |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 ⑥ | CL7-23E-10- <i>*</i> -AH25A-A10 ⑥ |
| KTA7-45H — High Interrupting Capacity ④ | | | | | | | |
| 6.3...10 | 130 | 36 | 3 | 3 | 5 | 7-1/2 | CL7-30E-10- <i>*</i> -AH10A-A10-W |
| 10...16 | 208 | 38 | 3 | 5 | 10 | 10 | CL7-30E-10- <i>*</i> -AH16A-A10-W |
| 14.5...20 | 260 | 38 | 5 | 5 | 10 | 15 | CL7-30E-10- <i>*</i> -AH20A-A10-W |
| 18...25 | 325 | 39 | 7-1/2 | 7-1/2 | 15 | 20 | CL7-30E-10- <i>*</i> -AH25A-A10-W |
| 23...32 | 416 | 41 | 7-1/2 | 10 | 20 | 25 | CL7-30E-10- <i>*</i> -AH32A-A10-W |
| 32...45 | 585 | 44 | 10 | 10 | 25 | 30 | CL7-37E-10- <i>*</i> -AH45A-A10-W |
| 32...45 | 585 | 46 | 10 | 15 | 30 | 30 | CL7-43E-11- <i>*</i> -AH45A-A10-W ⑤ |



CL7-23E-10-24E-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7-9E...43E Contactor
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ⑤

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Section Obsolete
See pages F1.40 - F1.55

For applications above 45 amps please consider open type combination starters on page C59

Coil Codes ②

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.


Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② CL7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ③ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
- ④ CL7-30E...43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add -W to end of catalog number. See page F69 for modifications.
- ⑤ CL7-43E supplied with (1) NO and (1) NC front mount auxiliary.
- ⑥ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ③

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ②⑥ |
|--|-------------------|---------|--------------------------|---------|------|---------|---------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CLU7-9-22-*AS0.16A-A10 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CLU7-9-22-*AS0.25A-A10 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CLU7-9-22-*AS0.4A-A10 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CLU7-9-22-*AS0.63A-A10 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CLU7-9-22-*AS1A-A10 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CLU7-9-22-*AS1.6A-A10 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CLU7-9-22-*AS2.5A-A10 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CLU7-9-22-*AS4A-A10 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 ⑤ | CLU7-9-22-*AS6.3A-A10 ⑤ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑤ | CLU7-12-22-*AS10A-A10 ⑤ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑤ | CLU7-16-22-*AS16A-A10 ⑤ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑤ | CLU7-23-22-*AS20A-A10 ⑤ |
| 18.5...25 | 325 | 16 | 5 ⑤ | 7-1/2 ⑤ | 15 ⑤ | 20 ⑤ | CLU7-23-22-*AS25A-A10 ⑤ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CLU7-9-22-*AH2.5A-A10 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CLU7-9-22-*AH4A-A10 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CLU7-9-22-*AH6.3A-A10 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CLU7-12-22-*AH10A-A10 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CLU7-16-22-*AH16A-A10 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 ⑤ | CLU7-23-22-*AH20A-A10 ⑤ |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 ⑤ | CLU7-23-22-*AH25A-A10 ⑤ |
| KTA7-45H — High Interrupting Capacity | | | | | | | |
| 6.3...10 | 130 | 36 | 2 | 3 | 5 | 7-1/2 | CLU7-30-22-*AH10A-A10-W |
| 10...16 | 208 | 37 | 3 | 5 | 10 | 10 | CLU7-30-22-*AH16A-A10-W |
| 14.5...20 | 260 | 38 | 5 | 5 | 10 | 15 | CLU7-30-22-*AH20A-A10-W |
| 18...25 | 325 | 39 | 7-1/2 | 10 | 15 | 20 | CLU7-30-22-*AH25A-A10-W |
| 23...32 | 416 | 41 | 7-1/2 | 10 | 20 | 25 | CLU7-30-22-*AH32A-A10-W |
| 32...45 | 585 | 45 | 10 | 10 | 25 | 30 | CLU7-37-22-*AH45A-A10-W |
| 32...45 | 585 | 46 | 10 | 15 | 30 | 30 | CLU7-43-22-*AH45A-A10-W ④ |

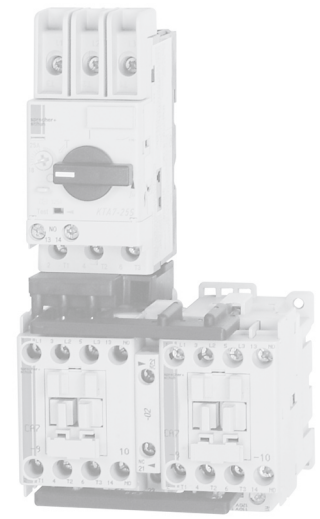

CLU7-9-22-120-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (AC)
- Connecting Module (Cat.# K17-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ③

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Section Obsolete
See pages F140 - F155

Coil Codes (*) ②

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 | 400-415V | ~ |
| 480 ⑤ | 440V | 480V |
| 600 ⑤ | 550V | 600V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions


| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Other voltages available, see Section A in this catalog.
- ③ CLU7-30...43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add -W to end of catalog number. See page F69 for modifications.
- ④ CLU7-43 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
- ⑤ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
- ⑥ Suffix -A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix -A10 to -AS11 (example CLU7-9-22-*AS0.16A-AS11) See options on page F69.

F Ecombo Circuit Controllers

Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ③

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|---------|--------------------------|---------|------|---------|----------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CLU7-9E-22-*AS0.16A-A10 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CLU7-9E-22-*AS0.25A-A10 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CLU7-9E-22-*AS0.4A-A10 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CLU7-9E-22-*AS0.63A-A10 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CLU7-9E-22-*AS1A-A10 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CLU7-9E-22-*AS1.6A-A10 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CLU7-9E-22-*AS2.5A-A10 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CLU7-9E-22-*AS4A-A10 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 ⑥ | CLU7-9E-22-*AS6.3A-A10 ⑥ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑥ | CLU7-12E-22-*AS10A-A10 ⑥ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑥ | CLU7-16E-22-*AS16A-A10 ⑥ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑥ | CLU7-23E-22-*AS20A-A10 ⑥ |
| 18.5...25 | 325 | 16 | 5 ⑥ | 7-1/2 ⑥ | 15 ⑥ | 20 ⑥ | CLU7-23E-22-*AS25A-A10 ⑥ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CLU7-9E-22-*AH2.5A-A10 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CLU7-9E-22-*AH4A-A10 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CLU7-9E-22-*AH3A-A10 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CLU7-12E-22-*AH4A-A10 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CLU7-16E-22-*AH16A-A10 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 | CLU7-23E-22-*AH20A-A10 ⑥ |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 ⑥ | CLU7-23E-22-*AH25A-A10 ⑥ |
| KTA7-45H — High Interrupting Capacity ④ | | | | | | | |
| 6.3...10 | 130 | 35 | 3 | 5 | 5 | 7-1/2 | CLU7-30E-22-*AH10A-A10-W |
| 10...16 | 208 | 37 | 5 | 5 | 10 | 10 | CLU7-30E-22-*AH16A-A10-W |
| 14.5...20 | 260 | 38 | 5 | 5 | 10 | 15 | CLU7-30E-22-*AH20A-A10-W |
| 18...25 | 325 | 39 | 7-1/2 | 7-1/2 | 15 | 20 | CLU7-30E-22-*AH25A-A10-W |
| 23...32 | 416 | 41 | 7-1/2 | 10 | 15 | 25 | CLU7-30E-22-*AH32A-A10-W |
| 32...45 | 585 | 45 | 10 | 10 | 25 | 30 | CLU7-37E-22-*AH45A-A10-W |
| 32...45 | 585 | 45 | 10 | 15 | 30 | 30 | CLU7-43E-22-*AH45A-A10-W ⑤ |

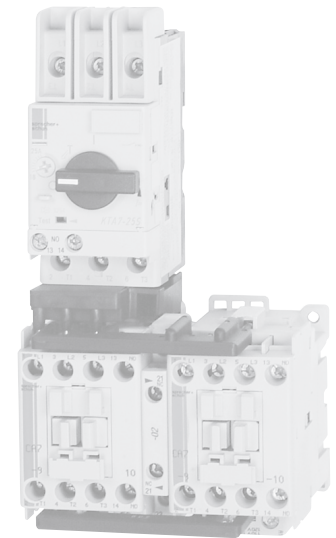

CLU7-9E-22-24E-AS25A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- 1 CA7-9E...43E Contactors
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ③

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Section Obsolete
See pages F1.40 - F1.55

Coil Codes ②

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② CLU7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ③ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
- ④ CLU7-30E...43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add -W to end of catalog number. See page F69 for modifications.
- ⑤ CLU7-43E supplied with (1) NO and (1) NC front mount auxiliary per contactor.
- ⑥ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Non-Reversing EcomboPlus Starters with AC Coil, Series CA7 Contactors

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ②⑥ |
|--|-------------------|---------|--------------------------|-------|------|-------|-----------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CK7-9-10-*AS0.16A-A11 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CK7-9-10-*AS0.25A-A11 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CK7-9-10-*AS0.4A-A11 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CK7-9-10-*AS0.63A-A11 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CK7-9-10-*AS1A-A11 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CK7-9-10-*AS1.6A-A11 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CK7-9-10-*AS2.5A-A11 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CK7-9-10-*AS4A-A11 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 | CK7-9-10-*AS6.3A-A11 |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 | CK7-12-10-*AS10A-A11 |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 | CK7-16-10-*AS16A-A11 |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 | CK7-23-10-*AS20A-A11 |
| 18.5...25 | 325 | 16 | 5 | 7-1/2 | 15 | 20 | CK7-23-10-*AS25A-A11 |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CK7-9-10-*AH2.5A-A11 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CK7-9-10-*AH4A-A11 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CK7-9-10-*AH6.3A-A11 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CK7-12-10-*AH10A-A11 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CK7-16-10-*AH16A-A11 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 | CK7-23-10-*AH20A-A11 |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 | CK7-23-10-*AH25A-A11 |
| KTA7-45H — Higher Interrupting Capacity | | | | | | | |
| 6.3...10 | 130 | 36 | 2 | 3 | 5 | 7-1/2 | CK7-12-10-*AH10A-A11 |
| 10...16 | 208 | 37 | 3 | 5 | 10 | 10 | CK7-16-10-*AH16A-A11 |
| 14.5...20 | 260 | 38 | 5 | 5 | 10 | 15 | CK7-23-10-*AH20A-A11 |
| 18...25 | 325 | 39 | 7-1/2 | 7-1/2 | 15 | 20 | CK7-30-11-*AH25A-A11 |
| 23...32 | 416 | 41 | 7-1/2 | 10 | 15 | 20 | CK7-30-11-*AH32A-A11 |
| 32...45 | 585 | 45 | 10 | 10 | 25 | 30 | CK7-37-11-*AH45A-A11 |
| 32...45 | 585 | 46 | 10 | 15 | 30 | 30 | CK7-43-11-*AH45A-A11 |



Description ③
The EcomboPlus starter is a factory assembly consisting of a KT7 contactor with 1 NO - 1 NC auxiliary and a CA7 contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Section Obsolete
See pages F1.40 - F1.55

For applications above 45 amps please consider open type combination starters on page C59.

Coil Codes (*) ④⑥

| AC Coil Code | Voltage Range | |
|--------------|---------------|-----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200V-220V | 208V-240V |
| 277 | 240V | 277V |

Horsepower ratings shown in the tables are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

- KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- See Factory Options on page F69 for additional auxiliary contact configurations.
 - KT7 supplied with (1) NO and (1) NC auxiliary contact
 - CK7-9...23 supplied with (1) NO auxiliary contact
 - CK7-30...37 supplied with (1) NO and (1) NC side mount auxiliary contact
 - CK7-43 supplied with (1) NO and (1) NC front mount auxiliary contact
- Mounting Options:
 - Screw Fixing
 - Snap Fixing on (1) or (2) 35 mm DIN Rails
 - Snap Fixing on (1) 75 mm DIN Rail
- Other voltages available, see Section A in this catalog.
- Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
- Suffix -A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

Ecombo Circuit Controllers

Non-Reversing EcomboPlus Starters with Electronic DC Coil, Series CA7 Contactors ④⑤

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ② |
|--|-------------------|---------|--------------------------|---------|------|---------|-------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CK7-9E-10-*AS0.16A-A11 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CK7-9E-10-*AS0.25A-A11 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CK7-9E-10-*AS0.4A-A11 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CK7-9E-10-*AS0.63A-A11 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CK7-9E-10-*AS1A-A11 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CK7-9E-10-*AS1.6A-A11 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CK7-9E-10-*AS2.5A-A11 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CK7-9E-10-*AS4A-A11 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 ⑥ | CK7-9E-10-*AS6.3A-A11 ⑥ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑥ | CK7-12E-10-*AS10A-A11 ⑥ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑥ | CK7-16E-10-*AS16A-A11 ⑥ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑥ | CK7-23E-10-*AS20A-A11 ⑥ |
| 18.5...25 | 325 | 16 | 5 ⑥ | 7-1/2 ⑥ | 15 ⑥ | 20 ⑥ | CK7-23E-10-*AS25A-A11 ⑥ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CK7-9E-10-*AH2.5A-A11 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CK7-9E-10-*AH4A-A11 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CK7-9E-10-*AH6.3A-A11 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CK7-12E-10-*AH10A-A11 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CK7-16E-10-*AH16A-A11 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 ⑥ | CK7-23E-10-*AH20A-A11 ⑥ |
| 18...25 | 325 | 33 | 5 ⑥ | 7-1/2 ⑥ | 15 ⑥ | 20 ⑥ | CK7-23E-10-*AH25A-A11 ⑥ |
| KTA7-30E-11 — High Interrupting Capacity | | | | | | | |
| 6.3...10 | 130 | 37 | 2 | 3 | 5 | 10 | CK7-30E-11-*AH10A-A11 |
| 10...16 | 208 | 37 | 3 | 5 | 10 | 10 | CK7-30E-11-*AH16A-A11 |
| 14.5...20 | 260 | 38 | 5 | 5 | 10 | 15 | CK7-30E-11-*AH20A-A11 |
| 18...25 | 325 | 39 | 7-1/2 | 10 | 15 | 20 | CK7-30E-11-*AH25A-A11 |
| 23...32 | 416 | 41 | 10 | 15 | 20 | 25 | CK7-30E-11-*AH32A-A11 |
| 32...45 | 585 | 42 | 15 | 20 | 25 | 30 | CK7-37E-11-*AH45A-A11 |
| 32...45 | 585 | 43 | 10 | 15 | 30 | 30 | CK7-43E-11-*AH45A-A11 |



Description ③

- The EcomboPlus starter is a factory assembly consisting of a KT7 controller with 1 NO and 1 NC auxiliary and a CA7-9E...43E contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Section Obsolete
See pages F1.40 - F1.55

For applications above 45 amp, please consider open type combination starters on page C59.

Coil Codes ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

Horsepower ratings shown in the tables are for reference only. **The final selection of the controller depends on the actual motor full load current and service factor.**

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. - 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② See Factory Options on page F69 for additional auxiliary contact configurations.
 - CK7-9...23E supplied with (1) NO and (1) NC auxiliary contact
 - CK7-9...23E supplied with (1) NO auxiliary contact
 - CK7-30...37E supplied with (1) NO and (1) NC side mount auxiliary contact
 - CK7-43E supplied with (1) NO and (1) NC front mount auxiliary contact

- ③ Mounting Options:
 - Screw Fixing
 - Snap Fixing on (1) or (2) 35 mm DIN Rails
 - Snap Fixing on (1) 75 mm DIN Rail


- ④ CK7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑤ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
- ⑥ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

Reversing EcomboPlus Starters with AC Coil, Series CA7 Contactors

| Thermal Trip [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ②⑥ |
|--|-------------------|---------|--------------------------|---------|------|---------|-------------------------|
| | | | 200V | 230V | 460V | 575V | |
| KTA7-25S — Standard Interrupting Capacity | | | | | | | |
| 0.10...0.16 | 2.1 | 1 | ~ | ~ | ~ | ~ | CKU7-9-22-*AS0.16A-A11 |
| 0.16...0.25 | 3.3 | 2 | ~ | ~ | ~ | ~ | CKU7-9-22-*AS0.25A-A11 |
| 0.25...0.40 | 5.2 | 3 | ~ | ~ | ~ | ~ | CKU7-9-22-*AS0.4A-A11 |
| 0.40...0.63 | 8.2 | 4 | ~ | ~ | ~ | ~ | CKU7-9-22-*AS0.63A-A11 |
| 0.63...1 | 13 | 5 | ~ | ~ | ~ | 1/2 | CKU7-9-22-*AS1A-A11 |
| 1...1.6 | 21 | 6 | ~ | ~ | 1/2 | 3/4 | CKU7-9-22-*AS1.6A-A11 |
| 1.6...2.5 | 33 | 7 | 1/2 | 1/2 | 1 | 1-1/2 | CKU7-9-22-*AS2.5A-A11 |
| 2.5...4 | 52 | 8 | 3/4 | 3/4 | 2 | 3 | CKU7-9-22-*AS4A-A11 |
| 4...6.3 | 82 | 9 | 1 | 1-1/2 | 3 | 5 ⑤ | CKU7-9-22-*AS6.3A-A11 ⑤ |
| 6.3...10 | 130 | 11 | 2 | 3 | 5 | 7-1/2 ⑤ | CKU7-12-22-*AS10A-A11 ⑤ |
| 10...16 | 208 | 12 | 3 | 5 | 10 | 10 ⑤ | CKU7-16-22-*AS16A-A11 ⑤ |
| 14.5...20 | 260 | 15 | 5 | 5 | 10 | 15 ⑤ | CKU7-23-22-*AS20A-A11 ⑤ |
| 18.5...25 | 325 | 16 | 5 ⑤ | 7-1/2 ⑤ | 15 ⑤ | 20 ⑤ | CKU7-23-22-*AS25A-A11 ⑤ |
| KTA7-25H — High Interrupting Capacity | | | | | | | |
| 1.6...2.5 | 33 | 17 | 1/2 | 1/2 | 1 | 1-1/2 | CKU7-9-22-*AH2.5A-A11 |
| 2.5...4 | 52 | 19 | 3/4 | 3/4 | 2 | 3 | CKU7-9-22-*AH4A-A11 |
| 4...6.3 | 82 | 22 | 1 | 1-1/2 | 3 | 5 | CKU7-9-22-*AH6.3A-A11 |
| 6.3...10 | 130 | 24 | 2 | 3 | 5 | 7-1/2 | CKU7-12-22-*AH10A-A11 |
| 10...16 | 208 | 28 | 3 | 5 | 10 | 10 | CKU7-16-22-*AH16A-A11 |
| 14.5...20 | 260 | 31 | 5 | 5 | 10 | 15 ⑤ | CKU7-23-22-*AH20A-A11 ⑤ |
| 18...25 | 325 | 33 | 5 | 7-1/2 | 15 | 20 | CKU7-23-22-*AH25A-A11 |

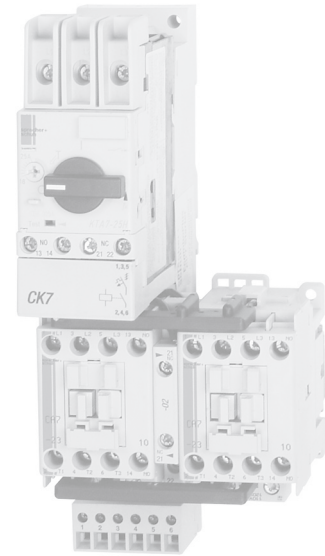

Description ③

The EcomboPlus Reversing starter is a factory assembly consisting of a KT7 contactor with 1 NO - 1 NC auxiliary contact and reversing CA7 contactors housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. A Reversing Power Wiring Kit (Cat.# CAUT7-PW23) is used to wire the reversing contactors. An electrical and mechanical interlock is also provided (Cat.# CM7-02), as well as a Terminal Adaptor (Cat.# KT7-25-TE1) for Type E applications.

Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the 0.9hp current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0; 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-5S-4.

Coil Codes (*) ④⑥

| AC Coil Code | Voltage Range | |
|--------------|---------------|-----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200V-220V | 208V-240V |
| 277 | 240V | 277V |

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

- KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- See Factory Options on page F69 for additional auxiliary contact configurations.
 - KT7 supplied with (1) NO and (1) NC auxiliary contact
 - CKU7 supplied with (2) NO auxiliary contact
 - CM7-02 interlock supplied with (2) NC auxiliary contacts
- Mounting Options:
 - Screw Fixing
 - Snap Fixing on (1) or (2) 35 mm DIN Rails
 - Snap Fixing on (1) 75 mm DIN Rail
- Other voltages available, see Section A in this catalog.
- Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
- Suffix -A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

Ecombo Circuit Controllers

Section Obsolete
See pages F1.40 - F1.55

CL8 and CL7 Modifications ④⑤

| Modification | Change Last Digit in Catalog Number to: ① |
|--|---|
| KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts | |
| Auxiliary Contact 1 NO (CL8 only) | A10 |
| Auxiliary Contact 1 NC | A01 |
| Auxiliary Contact 1 NO + 1 NC | A11 |
| Auxiliary Contact 2 NO | A20 |
| 1 NO SC or OL + 1 NC Auxiliary Contact | T10A01 |
| 1 NO SC or OL + 1 NO Auxiliary Contact | T10A10 |
| KT7 Auxiliary (Side Mount 600VAC max.) and Trip Contacts | |
| Auxiliary Contact 1 NO + 1 NC | AS11 |
| Auxiliary Contact 2 NO | AS20 |
| 1 NC SC or OL + 1 NO Auxiliary Contact | R10 |
| 1 NO SC or OL + 1 NC Auxiliary Contact | R11 |

CL8 and CL7 Additions ④⑤

Add desired suffix AFTER auxiliary contact option code.

| Addition | Add Suffix to Catalog Number: |
|--|-------------------------------|
| Accessories | |
| Electronic Interfaces (CA7) | -JE ③ |
| Surge Suppressor RC (CA7, CA8) | -R |
| Surge Suppressor Varistor (CA7, CA8) | -V |
| Surge Suppressor Diode (CA7, CA8) | -D |
| Lockable Twist Knob (KT7) - Black | -KN |
| Lockable Twist Knob (KT7) - Red/Yellow | -KRY |
| Type W Mounting Module for CL7...23 includes 45mm short module (W-3248) ② | -W |
| Type W Mounting Module for CLU7...23 includes 45mm (W-32849) and 54mm (W-32490) short module ② | -W |
| Additional CA7 Contactor Auxiliaries (Side Mount) | |
| 1 NC | -S01 |
| 1 NO | -S10 |
| 1 NO + 1 NC | -S11 |
| 2 NO | -S20 |
| Additional CA7 & CA8 Contactor Auxiliaries (Front Mount) | |
| 1 NO + 1 NC | -F11 |
| 2 NO | -F20 |
| 2 NO + 2 NC | -F22 |
| Additional KT7 Auxiliaries (Side Mount) ⑤ | |
| 2 NC | -AS02 |
| 2 NO | -AS20 |
| 1 NO + 1 NC | -AS11 |
| Additional KT7 Trip Contacts (Side Mount) ⑤ | |
| 1 NO SC or OL + 1 NO SC | -R00 |
| 1 NO SC or OL + 1 NC SC | -R01 |
| 1 NC SC or OL + 1 NO SC | -R10 |
| 1 NC SC or OL + 1 NC SC | -R11 |
| 1 NO SC + 1 NC SC | -M11 |

- ① For CL8, change last digit "X" to one of the modifications listed. Example: CL8-09-10-*****-AS0.16A-**X** changes to CL8-09-10-*****-AS0.16A-**A10**. For CL7, change last digits "A10" to one of the modifications listed. Example: CL7-9-10-*****-AS0.16A-**A10** changes to CL7-9-10-*****-AS0.16A-**A01**.
- ② CL7/CLU7-30...43 include all Type W Mounting Modules necessary from page F17.

CK7 Modifications ⑤

| Modification | Change Last Digits (A11) in Catalog Number to: ① |
|--|--|
| CK7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts | |
| Auxiliary Contact 2 NO | A20 |
| 1 NO SC or OL + 1 NC Auxiliary Contact | T10A01 |
| 1 NO SC or OL + 1 NO Auxiliary Contact | T10A10 |

CK7 Additions ④⑤

Add desired suffix AFTER auxiliary contact option code.

| Addition | Add Suffix to Catalog Number: |
|--|-------------------------------|
| Accessories | |
| Electronic Interfaces (CA7) | -JE |
| Surge Suppressor RC (CA7) | -R |
| Surge Suppressor Varistor (CA7) | -V |
| Surge Suppressor Diode (CA7) | -D |
| Socket and Plug for Control Circuit | -SP |
| Lockable Twist Knob (KT7) - Black | -KN |
| Lockable Twist Knob (KT7) - Red/Yellow | -KRY |
| Additional Contactor Auxiliaries (Side Mount) | |
| 1 NC | -S01 |
| 1 NO | -S10 |
| 1 NO + 1 NC | -S11 |
| 2 NO | -S20 |
| Additional CA7 Auxiliaries (Side Mount) ⑤ | |
| 2 NC | -AS02 |
| 2 NO | -AS20 |
| 1 NO + 1 NC | -AS11 |
| Additional KT7 Trip Contacts (Side Mount) ⑤ | |
| 1 NO SC or OL + 1 NO SC | -R00 |
| 1 NO SC or OL + 1 NC SC | -R01 |
| 1 NC SC or OL + 1 NO SC | -R10 |
| 1 NC SC or OL + 1 NC SC | -R11 |
| 1 NO SC + 1 NC SC | -M11 |


- ③ CRI7E-24 will be used. CRI7E-12 by special order only.
- ④ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
- ⑤ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC where there would be no connection to the terminal block provided.

F
ECombo Circuit Controllers

Section Obsolete
See pages F1.40 - F1.55

Non-Reversing 3-Component Ecombo Starters with AC Coil ③⑤

| Rated Oper. Current [A] ⑥ | Overload Adj. Range [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] ⑥ | | | | Catalog Number ②④⑦ |
|--|-------------------------|-------------------|---------|----------------------------|-------|------|-------|--------------------------|
| | | | | 200V | 230V | 460V | 575V | |
| KTB7-25S — Standard Interrupting Capacity | | | | | | | | |
| 0.40 | 0.1...0.5 | 5.2 | 3B | ~ | ~ | ~ | ~ | CLT7-9-*B2S0.4-A10-D1AB |
| 0.40 | 0.1...0.5 | 5.2 | 3B | ~ | ~ | ~ | ~ | CLT7-9-*B2S0.4-A10-EAB |
| 1.0 | 0.2...1.0 | 13 | 5B | ~ | ~ | ~ | 1/2 | CLT7-9-*B2S1-A10-D1BB |
| 1.0 | 0.2...1.0 | 13 | 5B | ~ | ~ | ~ | 1/2 | CLT7-9-*B2S1-A10-EBB |
| 2.5 | 1.0...5.0 | 33 | 7B | 1/2 | 1/2 | 1 | ~ | CLT7-9-*B2S2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 7B | 1/2 | 1/2 | 1 | ~ | CLT7-9-*B2S2.5-A10-ECB |
| KTB7-25H — High Interrupting Capacity | | | | | | | | |
| 2.5 | 1.0...5.0 | 33 | 17B | 1/2 | 1/2 | 1 | ~ | CLT7-9-*B2H2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 17B | 1/2 | 1/2 | 1 | ~ | CLT7-9-*B2H2.5-A10-ECB |
| 2.5 | 1.0...5.0 | 33 | 18B | 1/2 | 1/2 | 1 | 1-1/2 | CLT7-23-*B2H2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 18B | 1/2 | 1/2 | 1 | 1-1/2 | CLT7-23-*B2H2.5-A10-ECB |
| 4.0 | 1.0...5.0 | 52 | 21B | 3/4 | 3/4 | 2 | 3 | CLT7-23-*B2H4-A10-D1CB |
| 4.0 | 1.0...5.0 | 52 | 21B | 3/4 | 3/4 | 2 | 3 | CLT7-23-*B2H4-A10-ECB |
| 10 | 5.1...27 | 130 | 27B | 2 | 3 | 5 | 7-1/2 | CLT7-30-*B2H10-A10-EED |
| 16 | 5.1...27 | 208 | 30B | 3 | 5 | 10 | 10 | CLT7-30-*B2H10-A10-EED |
| 25 | 5.1...27 | 325 | 34B | 5 | 7-1/2 | 15 | ~ | CLT7-30-*B2H10-A10-EED |
| KTB7-45H — High Interrupting Capacity | | | | | | | | |
| 25 | 5.1...27 | 325 | 39B | 5 | 7-1/2 | 15 | ~ | CLT7-30-*B4H25-A10-EED |
| 32 | 9...45 | 416 | 41B | 7-1/2 | 10 | 20 | 20 | CLT7-37-*B4H32-A10-EFD |
| 32 | 9...45 | 416 | 42B | 7-1/2 | 10 | 20 | 20 | CLT7-37-*B4H32-A10-EFD |
| 45 | 9...45 | 585 | 45B | 10 | 10 | 25 | 30 | CLT7-37-*B4H45-A10-EFD |
| 45 | 9...45 | 585 | 46B | 10 | 15 | 30 | 30 | CLT7-43-*B4H45-A10-EFD |

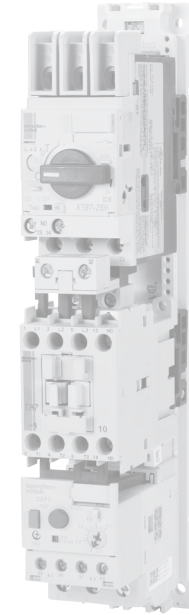

Includes:

- KTB7 Motor Controller
- CA7 Contactor (AC)
- CEP7 Solid State Overload Relay
- KT7-PE10 PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Section Obsolete
See pages F1.40 - F1.55

Coil Codes (*) ②

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 | 400-415V | ~ |
| 480 ⑦ | 440V | 480V |
| 600 ⑦ | 550V | 600V |


- KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- Other voltages available, see Section A in this catalog.
- All CLT7 contactors are supplied with Auxiliary Contacts as follows:
 CLT7-9...23 (1) NO Internal Mount
 CLT7-30...37 (1) NO Side Mount
 CLT7-43 (1) NO & (1) NC Front Mount
 All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
- See page F72 for CEP7 Overload Relay information.
- Horsepower ratings shown in tables are for reference only. **The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.**
- The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.
 In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.
 Trip classes according to UL 508 Section 52 and IEC 60947-4-1
 CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
 The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
- Catalog number includes -A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change -A10 to -AS11 (example CLT7-9-*B2S0.4-AS11-D1AB) Add \$66.43 or see options on page F72.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

Reversing 3-Component Ecombo Starters with AC Coil ③④⑤

| Rated Oper. Current [A] ⑥ | Overload Adj. Range [A] | Magnetic Trip [A] | Index ① | Typical Three Phase [HP] | | | | Catalog Number ②④⑦ |
|--|-------------------------|-------------------|---------|--------------------------|-------|------|-------|---------------------------|
| | | | | 200V | 230V | 460V | 575V | |
| KTB7-25S — Standard Interrupting Capacity | | | | | | | | |
| 0.40 | 0.1...0.5 | 5.2 | 3B | ~ | ~ | ~ | ~ | CLUT7-9-*B2S0.4-A10-D1AB |
| 0.40 | 0.1...0.5 | 5.2 | 3B | ~ | ~ | ~ | ~ | CLUT7-9-*B2S0.4-A10-EAB |
| 1.0 | 0.2...1.0 | 13 | 5B | ~ | ~ | ~ | 1/2 | CLUT7-9-*B2S1-A10-D1BB |
| 1.0 | 0.2...1.0 | 13 | 5B | ~ | ~ | ~ | 1/2 | CLUT7-9-*B2S1-A10-EBB |
| 2.5 | 1.0...5.0 | 33 | 7B | 1/2 | 1/2 | 1 | ~ | CLUT7-9-*B2S2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 7B | 1/2 | 1/2 | 1 | ~ | CLUT7-9-*B2S2.5-A10-ECB |
| KTB7-25H — High Interrupting Capacity | | | | | | | | |
| 2.5 | 1.0...5.0 | 33 | 17B | 1/2 | 1/2 | 1 | ~ | CLUT7-9-*B2H2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 17B | 1/2 | 1/2 | 1 | ~ | CLUT7-9-*B2H2.5-A10-ECB |
| 2.5 | 1.0...5.0 | 33 | 18B | 1/2 | 1/2 | 1 | 1-1/2 | CLUT7-23-*B2H2.5-A10-D1CB |
| 2.5 | 1.0...5.0 | 33 | 18B | 1/2 | 1/2 | 1 | 1-1/2 | CLUT7-23-*B2H2.5-A10-ECB |
| 4.0 | 1.0...5.0 | 52 | 21B | 3/4 | 3/4 | 2 | 3 | CLUT7-23-*B2H4-A10-D1CB |
| 4.0 | 1.0...5.0 | 52 | 21B | 3/4 | 3/4 | 2 | 3 | CLUT7-23-*B2H4-A10-ECB |
| 10 | 5.1...27 | 130 | 27B | 2 | 3 | 5 | 7-1/2 | CLUT7-30-*B2H7-A10-EED |
| 16 | 5.1...27 | 208 | 30B | 3 | 5 | 10 | 10 | CLUT7-30-*B2H10-A10-EED |
| 25 | 5.1...27 | 325 | 34B | 5 | 7-1/2 | 15 | ~ | CLUT7-30-*B2H25-A10-EED |
| KTB7-45H — High Interrupting Capacity | | | | | | | | |
| 25 | 5.1...27 | 325 | 39B | 5 | 7-1/2 | 15 | 20 | CLUT7-30-*B4H25-A10-EED |
| 32 | 9...45 | 416 | 41B | 7-1/2 | 10 | 20 | 20 | CLUT7-30-*B4H32-A10-EFD |
| 32 | 9...45 | 416 | 42B | 7-1/2 | 10 | 20 | 20 | CLUT7-37-*B4H32-A10-EFD |
| 45 | 9...45 | 585 | 45B | 10 | 10 | 20 | 20 | CLUT7-37-*B4H45-A10-EFD |
| 45 | 9...45 | 585 | 46B | 10 | 10 | 20 | ~ | CLUT7-43-*B4H45-A10-EFD |

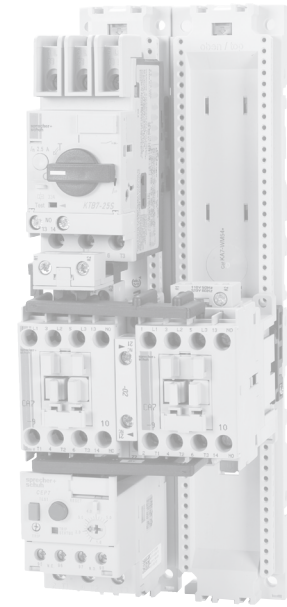

Includes:

- KTB7 Motor Controller
- CAU7 Reversing Contactor (AC)
- CEP7 Solid State Overload Relay
- RT1 PSC and PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Section Obsolete
See pages F1.40 - F1.55

Coil Codes (*) ②

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 | 400-415V | ~ |
| 480 ⑦ | 440V | 480V |
| 600 ⑦ | 550V | 600V |

- ① KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ② Other voltages available, see Section A in this catalog.
- ③ All CLUT7 are supplied with Auxiliary Contacts for customer use as follows;
 - CLUT7-9...23 (1) NO Internal Mount
 - CLUT7-30...37 (1) NO Side Mount
 - CLUT7-43 (1) NO & (1) NC Front Mount
 - CM7-02 interlock (2) NC (Electrical Interlocks)
 All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
- ④ All CAU7 reversing contactors are supplied with CM7-02, including (2) NC contacts for electronic interlocking (not available for customer use).
- ⑤ Horsepower ratings shown in tables are for reference only. **The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.**
- ⑥ The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.

In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_o) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.

Trip classes according to UL 508 Section 52 and IEC 60947-4-1
 CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73

The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
- ⑦ Catalog number includes -A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change -A10 to -AS11 (example CLUT7-9-*B2S0.4-AS11-D1AB) Add \$66.43 or see options on page F72.

Ordering Instructions

| | |
|----------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code table on this page for codes. |

CLT7/CLUT7 Modifications ⑩

| Modification | Change "X" Digit in Catalog Number to: ⑥ |
|--|--|
| KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts | |
| Auxiliary Contact 1 NO + 1 NC | A11 |
| Auxiliary Contact 2 NO | A20 |
| 1 NO SC + 1 NC Auxiliary Contact | T10A01 |
| 1 NO SC + 1 NO Auxiliary Contact | T10A10 |
| KT7 Auxiliary (Side Mount 300VAC max.) and Trip Contacts | |
| Auxiliary Contact 1 NO + 1 NC | AS11 |
| Auxiliary Contact 2 NO | AS20 |
| 1 NC SC + 1 NO Auxiliary Contact | R10 |
| 1 NC SC + 1 NC Auxiliary Contact | R11 |

CLT7/CLUT7 Additions ⑩

| Addition | Add Suffix to end of Catalog Number: |
|---|--------------------------------------|
| Accessories | |
| Electronic Interfaces | -JE |
| Surge Suppressor RC | -R |
| Surge Suppressor Varistor | -V |
| Surge Suppressor Diode | -D |
| Lockable Twist Knob (KT7) - Black | -KN |
| Lockable Twist Knob (KT7) - Red/Yellow | -KRY |
| Additional CA7 Contactor Auxiliaries (Side Mount) ⑩ | |
| 1 NC | -S10 |
| 1 NO | -S11 |
| 1 NO + 1 NC | -S11 |
| 2 NO | -S20 |
| Additional CA7 Contactor Auxiliaries (Front Mount) ⑩ | |
| 1 NO + 1 NC | -F10 |
| 2 NO | -F20 |
| 2 NO + 2 NC | -F22 |
| Additional KT7 Auxiliaries (Side Mount) ⑩⑩ | |
| 2 NC | -AS02 |
| 2 NO | -AS20 |
| 1 NO + 1 NC | -AS11 |
| Additional KT7 Trip Contacts (Side Mount) ⑩ | |
| 1 NO SC + 1 NO SC | -R00 |
| 1 NO SC + 1 NC SC | -R01 |
| 1 NC SC + 1 NC SC | -R11 |

CEP7 Solid State Overload Relay ①②③

(As specified in the CLT7/CLUT7 Catalog Number)

| For use with contactor... | Amp Range | Last Suffix in Catalog Number ⑤ | Catalog Number (of Overload Relay used) |
|---|-----------|---------------------------------|---|
| 3-Phase / Manual Reset / Class 10 | | | |
| CA7-9...CA7-23 | 0.1...0.5 | D1AB | CEP7-ED1AB |
| | 0.2...1.0 | D1BB | CEP7-ED1BB |
| | 1.0...5.0 | D1CB | CEP7-ED1CB |
| 3-Phase / Auto or Manual / Adjustable Trip Class 10, 15, 20 & 30 | | | |
| CA7-9...CA7-23 | 0.1...0.5 | EAB | CEP7-EEAB |
| | 0.2...1.0 | EBB | CEP7-EEBB |
| | 1.0...5.0 | ECB | CEP7-EECB |
| CA7-30...CA7-43 | 5.4...27 | EED | CEP7-EEED |
| | 9...45 | EFD | CEP7-EEFD |

CEP7 Side Mount Module Addition ④⑦⑨

| Addition | For use with... | Add Suffix to end of Catalog Number |
|---|---|-------------------------------------|
| Remote Reset Module | Side-mount to any CEP7-EE_ | -ERR |
| Jam Protection and Remote Reset Module | Side-mount to any CEP7-EE_ | -EJM |
| Ground Fault Protection and Remote Reset Module ⑥ | Side-mount to any CEP7-EE_ | -EGF |
| Ground Fault/Jam Protection and Remote Reset Module ⑥ | Must use with CEP7-CBCT_ Current Sensor | -EGJ |
| PTC Thermistor Relay and Remote Reset Module | Side-mount to any CEP7-EE_ | -EPT |
| Ethernet Network Communication Module | Side-mount to any CEP7-EE_ | -ETN |

Section Obsolete
See pages F1.40 - F1.55

- ① 3-phase CEP7 units are only designed for 3∅ applications.
- ② The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.
- ③ CEP7 Overload relays do not work with Variable Frequency Drives or any Sprecher + Schuh Softstarter with braking options.
- ④ Side mount modules must have 24 - 240V, 47 - 63HZ or DC applied to terminals A1 and A2 for control power. See Section B for connection details.
- ⑤ CEP7 Overloads shown are UL approved. Other overload combinations may be possible. Contact your Sprecher + Schuh representative.
- ⑥ ATTENTION: The CEP7 Overload relay is not a ground fault circuit interrupter for

- personnel protection as defined in Article 100 of the NEC.
- ⑦ See Section B for Technical Data, Wiring, and DIP Switch set up.
- ⑧ For CLT7, change digit "A10" to one of the modifications listed. Example: Change CLT7-9-*B2S0.4-A10-D1AB to CLT7-9-*B2S0.4-A11-D1AB.
- ⑨ Side mount auxiliaries and CEP7 modules change the width dimension of the device. See Dimensions in this section for more information.
- ⑩ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC. See page F12 for additional information.

KT7 Assembly – Application Rating Chart (Ratings are dependent on type of application) ①

| Rating Index | Assembly Components | | Manual Controller or Group Installation | | | | Combination Motor Controller (Type F) | | | | Self-Protected Combination Motor Controller (Type E) | |
|---|---------------------|------------------------|---|-------------|-------------|-------------|---------------------------------------|-------------|-------------|-------------|--|-------------|
| | | | 480V | | 600V | | 480Y / 277V | | 600Y / 347V | | 480Y / 277V | 600Y / 347V |
| | KT7 | Minimum Contactor Size | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type E KAIC | Type E KAIC |
| KT7 + CA7 UL Assemblies (CL7 / CLU7/ CK7 / CKU7) | | | | | | | | | | | | |
| 1 | KTA7-25S-0.16A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 2 | KTA7-25S-0.25A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 3 | KTA7-25S-0.4A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 4 | KTA7-25S-0.63A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 5 | KTA7-25S-1A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 6 | KTA7-25S-1.6A | CA7-9 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| 7 | KTA7-25S-2.5A | CA7-9 | 65 | 65 | 30 | 10 | 65 | 65 | 30 | 10 | 65 | ~ |
| 8 | KTA7-25S-4A | CA7-9 | 65 | 50 | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| -- | KTA7-25S-4A | CA7-30 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| 9 | KTA7-25S-6.3A | CA7-9 | 65 | 50 | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 11 | KTA7-25S-10A | CA7-9 | 65 | 50 | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 12 | KTA7-25S-16A | CA7-12 | 30 | ~ | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 14 | KTA7-25S-16A | CA7-30 | 30 | ~ | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 15 | KTA7-25S-20A | CA7-16 | 30 | ~ | 30 | ~ | 10 | ~ | ~ | ~ | ~ | ~ |
| 16 | KTA7-25S-25A | CA7-23 | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| -- | KTA7-32S-29A | CA7-30 | 30 | 10 | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| -- | KTA7-32S-32A | CA7-37 | 30 | 10 | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| 17 | KTA7-25H-2.5A | CA7-9 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 10 | 65 | ~ |
| 18 | KTA7-25H-2.5A | CA7-9 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 30 | 65 | 30 |
| 19 | KTA7-25H-4A | CA7-9 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | ~ | ~ | ~ |
| 21 | KTA7-25H-4A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 22 | KTA7-25H-6.3A | CA7-9 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | ~ | ~ | ~ |
| 23 | KTA7-25H-6.3A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 30 | 65 | 30 |
| 24 | KTA7-25H-10A | CA7-9 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | ~ | ~ | ~ |
| 27 | KTA7-25H-10A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 30 | 65 | 30 |
| 28 | KTA7-25H-16A | CA7-12 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | ~ | ~ | ~ |
| 30 | KTA7-25H-16A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 30 | 65 | 30 |
| 31 | KTA7-25H-20A | CA7-23 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | ~ | ~ |
| 32 | KTA7-25H-20A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | 65 | ~ |
| 33 | KTA7-25H-25A | CA7-23 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | ~ | ~ |
| 34 | KTA7-25H-25A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | 65 | ~ |
| -- | KTA7-32H-29A | CA7-30 | 65 | 65 | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| -- | KTA7-32H-32A | CA7-37 | 65 | 65 | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| 36 | KTA7-45H-10A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 37 | KTA7-45H-16A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 38 | KTA7-45H-20A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 39 | KTA7-45H-25A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 41 | KTA7-45H-32A | CA7-30 | 65 | 65 | 30 | 30 | 65 | 65 | 30 | 30 | 65 | 30 |
| 45 | KTA7-45H-45A | CA7-37 | 65 | 65 | 18 | 10 | 65 | 65 | ~ | ~ | 65 | ~ |
| 46 | KTA7-45H-45A | CA7-43 | 65 | 65 | 18 | 10 | 65 | 65 | ~ | ~ | 65 | ~ |

Section Obsolete
See pages F1.40 - F1.55

F
ECombo Circuit Controllers

Gray type indicates non-cataloged assembly. Contact your Sprecher + Schuh representative for information.

① The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules.
Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart (Ratings are dependent on type of application) ❶❷

| Rating Index | Assembly Components | | Manual Controller or Group Installation | | | | Combination Motor Controller (Type F) | | | | Self-Protected Combination Motor Controller (Type E) | |
|-----------------------------------|---------------------|------------------------|---|-------------|-------------|-------------|---------------------------------------|-------------|-------------|-------------|--|-------------|
| | | | 480V | | 600V | | 480Y / 277V | | 600Y / 347V | | 480Y / 277V | 600Y / 347V |
| | KT7 | Minimum Contactor Size | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type E KAIC | Type E KAIC |
| KTC7 + CA7 UL Assemblies ❶ | | | | | | | | | | | | |
| ❶ | KTC7-25S-0.16A | CA7-9...23 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| | KTC7-25S-0.25A | CA7-9...23 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| | KTC7-25S-0.4A | CA7-9...23 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| | KTC7-25S-0.63A | CA7-9...23 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| | KTC7-25S-1A | CA7-9...23 | 65 | 65 | 47 | 47 | 65 | 65 | 47 | 47 | 65 | 47 |
| | KTC7-25S-1.6A | CA7-9...23 | 65 | 65 | 30 | 10 | 65 | 65 | 30 | 10 | 65 | ~ |
| | KTC7-25S-2.5A | CA7-9...23 | 65 | 50 | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| | KTC7-25S-2.5A | CA7-23 | 65 | 50 | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| | KTC7-25S-4A | CA7-9...23 | 65 | 50 | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| | KTC7-25S-6.3A | CA7-12...23 | 65 | 50 | 30 | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| | KTC7-25S-10A | CA7-12...43 | 30 | ~ | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ |
| KTC7-25S-16A | CA7-23 | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ | ~ | ~ | |
| ❶ | KTC7-25H-16A | CA7-23 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | ~ | ~ |
| | KTC7-25H-16A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | 65 | ~ |
| | KTC7-25H-20A | CA7-23 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | ~ | ~ |
| | KTC7-25H-20A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | ~ | ~ | 65 | ~ |
| ❶ | KTC7-45H-25A | CA7-30 | 65 | 65 | 30 | ~ | 65 | 65 | 30 | 30 | 65 | 30 |
| | KTC7-45H-32A | CA7-37 | 65 | 65 | 10 | ~ | 65 | 65 | ~ | ~ | 65 | ~ |

Section Obsolete
See pages F1.40 - F1.55

F
ECombo Circuit Controllers

❶ Non-cataloged assemblies. Contact your Sprecher+ Schuh representative for information.
 ❷ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart (Ratings are dependent on type of application) ①

| Rating Index | Assembly Components | | Manual Controller or Group Installation | | | | Combination Motor Controller (Type F) | | | | Self-Protected Combination Motor Controller (Type E) | |
|---|-----------------------|------------------------|---|-------------|-------------|-------------|---------------------------------------|-------------|-------------|-------------|--|-------------|
| | | | 480V | | 600V | | 480Y / 277V | | 600Y / 347V | | 480Y / 277V | 600Y / 347V |
| | KT7 | Minimum Contactor Size | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type 1 KAIC | Type 2 KAIC | Type E KAIC | Type E KAIC |
| KT7 + CA8 UL Assemblies (CL8 / CLU8) | | | | | | | | | | | | |
| -- | KTA7-25S-(0.16A...1A) | CA8-05 | 65 | 65 | 47 | ~ | 65 | ~ | 47 | ~ | ~ | ~ |
| -- | KTA7-25S-1.6A | CA8-05 | 65 | ~ | 47 | ~ | 65 | ~ | 47 | ~ | ~ | ~ |
| -- | KTA7-25S-(2.5A...4A) | CA8-05 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| -- | KTA7-25S-6.3A | CA8-05 | 65 | ~ | ~ | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 1M | KTA7-25S-0.16A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 2M | KTA7-25S-0.25A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 3M | KTA7-25S-0.4A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 4M | KTA7-25S-0.63A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 5M | KTA7-25S-1A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 6M | KTA7-25S-1.6A | CA8-09 | 65 | 65 | 47 | ~ | 65 | 65 | 47 | ~ | ~ | ~ |
| 7M | KTA7-25S-2.5A | CA8-09 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| 8M | KTA7-25S-4A | CA8-09 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| 9M | KTA7-25S-6.3A | CA8-09 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| 10M | KTA7-25S-10A | CA8-09 | 65 | ~ | 30 | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| -- | KTA7-25S-(2.5A...4A) | CA8-12 | 65 | ~ | ~ | ~ | 65 | ~ | 30 | ~ | ~ | ~ |
| -- | KTA7-25S-6.3A | CA8-12 | 65 | ~ | ~ | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 11M | KTA7-25S-10A | CA8-09 | 65 | ~ | ~ | ~ | 65 | ~ | ~ | ~ | ~ | ~ |
| 12M | KTA7-25S-16A | CA8-12 | 30 | ~ | 30 | ~ | 30 | ~ | ~ | ~ | ~ | ~ |

Section Obsolete
See pages F1.40 - F1.55

F
ECombo Circuit Controllers

| Rating Index | Assembly Components | | Self-Protected Combination Motor Controller (Type E KAIC) ② | | | |
|---|---------------------|------------------------|---|-------------|-------------|----|
| | KT7 | Minimum Contactor Size | 208V-240V | 480Y / 277V | 600Y / 347V | |
| KT7 + CA7 CEP7 UL Assemblies (CLT7 / CLU7) | | | | | | |
| 3B | KTB7-25S-0.4A | CA7-9 | CEP7-ED1AB | 65 | 65 | 47 |
| 3B | KTB7-25S-0.4A | CA7-9 | CEP7-EEAB | 65 | 65 | 47 |
| 5B | KTB7-25S-1A | CA7-9 | CEP7-ED1BB | 65 | 65 | 47 |
| 5B | KTB7-25S-1A | CA7-9 | CEP7-EEBB | 65 | 65 | 47 |
| 7B | KTB7-25S-2.5A | CA7-9 | CEP7-ED1CB | 65 | 65 | ~ |
| 7B | KTB7-25S-2.5A | CA7-9 | CEP7-EECB | 65 | 65 | ~ |
| 17B | KTB7-25H-2.5A | CA7-9 | CEP7-ED1CB | 65 | 65 | ~ |
| 17B | KTB7-25H-2.5A | CA7-9 | CEP7-EECB | 65 | 65 | ~ |
| 18B | KTB7-25H-2.5A | CA7-23 | CEP7-ED1CB | 65 | 65 | 30 |
| 18B | KTB7-25H-2.5A | CA7-23 | CEP7-EECB | 65 | 65 | 30 |
| 21B | KTB7-25H-4A | CA7-23 | CEP7-ED1CB | 65 | 65 | 30 |
| 21B | KTB7-25H-4A | CA7-23 | CEP7-EECB | 65 | 65 | 30 |
| 27B | KTB7-25H-10A | CA7-30 | CEP7-EEED | 65 | 65 | 30 |
| 30B | KTB7-25H-16A | CA7-30 | CEP7-EEED | 65 | 65 | 30 |
| 34B | KTB7-25H-25A | CA7-30 | CEP7-EEED | 65 | 65 | ~ |
| 39B | KTB7-45H-25A | CA7-30 | CEP7-EEED | 65 | 65 | 30 |
| 41B | KTB7-45H-32A | CA7-30 | CEP7-EEFD | 65 | 65 | 30 |
| 42B | KTB7-45H-32A | CA7-37 | CEP7-EEFD | 65 | 65 | 30 |
| 45B | KTB7-45H-45A | CA7-37 | CEP7-EEFD | 65 | 65 | ~ |
| 46B | KTB7-45H-45A | CA7-43 | CEP7-EEFD | 65 | 65 | ~ |

Definition of Type 2 short-circuit coordination per UL508

- The contactor or starter must not endanger persons or plant in the event of a short-circuit.
- The contactor or starter must be suitable for continuous use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts if these can be easily separated without appreciable deformation (such as with a screwdriver).

In the event of a short-circuit, fast-opening, strong current-limiting KT7 motor protectors make it possible to build economical, fully short-circuit coordinated starter combinations in accordance with UL508E, Type 2 coordination.

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

① The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

② UL approved, File 125316.

KT7 Assembly – IEC Application Rating Chart (Ratings are dependent on type of application) ①

| Rating Index | Assembly Components | | IEC kW Ratings for Standard Motors, 1500 rpm Max. kW, 50Hz ② | | | | Max. Short-Circuit Current [kA] IEC Type 1 Coordination | | | | Max. Short-Circuit Current [kA] IEC Type 2 Coordination | | | |
|--|---------------------|----------------|---|------|------|------|--|------|------|------|--|------|------|------|
| | KT7 | Min. Contactor | 230V | 400V | 500V | 690V | 230V | 400V | 500V | 690V | 230V | 400V | 500V | 690V |
| KT7 + CA7 IEC Assemblies (CL7 / CLU7/ CK7 / CKU7) | | | | | | | | | | | | | | |
| 1 | KTA7-25S-0.16A | CA7-9 | ~ | ~ | 0.06 | 0.06 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 2 | KTA7-25S-0.25A | CA7-9 | 0.02 | 0.06 | 0.06 | 0.12 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 3 | KTA7-25S-0.4A | CA7-9 | 0.06 | 0.09 | 0.12 | 0.18 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 4 | KTA7-25S-0.63A | CA7-9 | 0.09 | 0.18 | 0.18 | 0.37 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 5 | KTA7-25S-1A | CA7-9 | 0.12 | 0.25 | 0.37 | 0.55 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 6 | KTA7-25S-1.6A | CA7-9 | 0.25 | 0.55 | 0.75 | 1.1 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| 7 | KTA7-25S-2.5A | CA7-9 | 0.55 | 0.75 | 1.1 | 1.8 | 100 | 65 | 50 | 8 | 65 | 50 | 50 | 8 |
| 8 | KTA7-25S-4A | CA7-9 | 0.75 | 1.5 | 2.2 | 3 | 100 | 50 | 50 | 8 | 50 | 50 | ~ | ~ |
| 9 | KTA7-25S-6.3A | CA7-9 | 1.5 | 2.2 | 3 | 4 | 100 | 50 | 50 | 4 | 50 | 50 | ~ | ~ |
| 10 | KTA7-25S-10A | CA7-9 | 2.2 | 4 | 4 | ~ | 100 | 65 | 50 | ~ | 50 | 50 | ~ | ~ |
| 11 | KTA7-25S-10A | CA7-12 | 2.2 | 4 | 5.5 | 5.5 | 100 | 65 | 50 | 4 | 50 | 50 | 50 | ~ |
| -- | KTA7-25S-10A | CA7-16 | 2.2 | 4 | 5.5 | 7.5 | 100 | 65 | 50 | 4 | 50 | 50 | 50 | ~ |
| 12 | KTA7-25S-16A | CA7-12 | 4 | 5.5 | ~ | ~ | 100 | 65 | ~ | ~ | 50 | 50 | ~ | ~ |
| -- | KTA7-25S-16A | CA7-16 | 4 | 7.5 | 7.5 | ~ | 100 | 50 | 10 | ~ | 50 | ~ | ~ | ~ |
| 14 | KTA7-25S-16A | CA7-23 | 4 | 7.5 | 10 | 10 | 100 | 50 | 10 | ~ | 50 | 50 | ~ | ~ |
| 15 | KTA7-25S-20A | CA7-23 | 4 | 10 | 11 | ~ | 50 | 15 | ~ | ~ | 15 | ~ | ~ | ~ |
| 16 | KTA7-25S-25A | CA7-23 | 6.3 | 11 | 13 | ~ | 50 | 15 | ~ | ~ | 15 | ~ | ~ | ~ |
| 17 | KTA7-25H-2.5A | CA7-9 | 0.55 | 0.75 | 1.1 | 8 | 100 | 100 | 50 | 10 | 100 | 100 | 50 | 10 |
| 18 | KTA7-25H-2.5A | CA7-23 | 0.55 | 0.75 | 1.1 | 1.1 | 100 | 100 | 50 | 10 | 100 | 100 | 50 | 10 |
| 19 | KTA7-25H-4A | CA7-9 | 0.75 | 1.5 | 2.2 | 3 | 100 | 100 | 50 | 10 | 100 | 100 | 50 | ~ |
| 21 | KTA7-25H-4A | CA7-23 | 0.75 | 1.5 | 2.2 | 3 | 100 | 100 | 50 | 10 | 100 | 100 | 50 | 50 |
| 22 | KTA7-25H-6.3A | CA7-9 | 1.5 | 2.2 | 3 | 4 | 100 | 100 | 50 | 50 | 100 | 100 | 50 | ~ |
| -- | KTA7-25H-10A | CA7-9 | 2.2 | 4 | 4 | ~ | 100 | 65 | 50 | ~ | 100 | 65 | ~ | ~ |
| 24 | KTA7-25H-10A | CA7-12 | 2.2 | 4 | 5.5 | 5.5 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | ~ |
| -- | KTA7-25H-10A | CA7-16 | 2.2 | 4 | 5.5 | 7.5 | 100 | 100 | 65 | 50 | 100 | 100 | 65 | 50 |
| -- | KTA7-25H-16A | CA7-12 | 4 | 5.5 | ~ | ~ | 100 | 65 | ~ | ~ | 65 | 65 | ~ | ~ |
| 28 | KTA7-25H-16A | CA7-16 | 4 | 7.5 | 7.5 | ~ | 100 | 65 | 50 | ~ | 65 | 65 | 50 | ~ |
| -- | KTA7-25H-16A | CA7-23 | 4 | 7.5 | 10 | 10 | 100 | 65 | 50 | 6 | 65 | 65 | 50 | ~ |
| 31 | KTA7-25H-20A | CA7-23 | 4 | 10 | 11 | ~ | 65 | 65 | 25 | ~ | 65 | 65 | 25 | ~ |
| 33 | KTA7-25H-25A | CA7-23 | 6.3 | 11 | 13 | ~ | 65 | 50 | 25 | ~ | 65 | 50 | 25 | ~ |
| KT7 + CA8 IEC Assemblies (CL8 / CLU8) | | | | | | | | | | | | | | |
| 1M | KTA7-25S-0.16A | CA8-09 | ~ | 0.02 | ~ | ~ | 100 | 65 | 65 | 65 | 65 | 65 | ~ | ~ |
| 2M | KTA7-25S-0.25A | CA8-09 | 0.02 | 0.06 | 0.06 | ~ | 100 | 65 | 65 | 65 | 65 | 65 | ~ | ~ |
| 3M | KTA7-25S-0.4A | CA8-09 | 0.06 | 0.09 | 0.12 | ~ | 100 | 65 | 65 | 65 | 65 | 65 | ~ | ~ |
| 4M | KTA7-25S-0.63A | CA8-09 | 0.09 | 0.18 | 0.18 | ~ | 100 | 65 | 65 | 65 | 65 | 65 | ~ | ~ |
| 5M | KTA7-25S-1A | CA8-09 | 0.12 | 0.25 | 0.37 | ~ | 100 | 65 | 65 | 65 | 65 | 65 | ~ | ~ |
| 6M | KTA7-25S-1.6A | CA8-09 | 0.25 | 0.55 | 0.75 | ~ | 100 | 65 | 65 | 10 | 65 | 65 | ~ | ~ |
| 7M | KTA7-25S-2.5A | CA8-09 | 0.55 | 0.75 | 1.1 | ~ | 100 | 65 | 65 | 8 | 65 | 65 | ~ | ~ |
| 8M | KTA7-25S-4A | CA8-09 | 0.75 | 1.5 | 2.2 | ~ | 100 | 65 | 65 | 8 | 50 | 50 | ~ | ~ |
| 9M | KTA7-25S-6.3A | CA8-09 | 1.5 | 2.2 | 2.2 | ~ | 100 | 65 | 65 | 4 | ~ | ~ | ~ | ~ |
| 10M | KTA7-25S-10A | CA8-09 | 2.2 | 4 | 4 | ~ | 100 | 65 | 65 | 4 | ~ | ~ | ~ | ~ |
| 11M | KTA7-25S-10A | CA8-12 | 2.2 | 4 | 4 | ~ | 100 | 65 | 65 | 4 | ~ | ~ | ~ | ~ |
| 12M | KTA7-25S-16A | CA8-12 | 4 | 5.5 | ~ | ~ | 100 | 50 | 50 | 3 | ~ | ~ | ~ | ~ |

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

① The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.


② kW ratings shown in the table are for reference. Final selection of the starter depends upon the actual motor full-load current and service factor.

ECombo Circuit Controllers

Section Obsolete
See pages F1.40 - F1.55

EcomboPlus Combination Starters


CK7-9...23

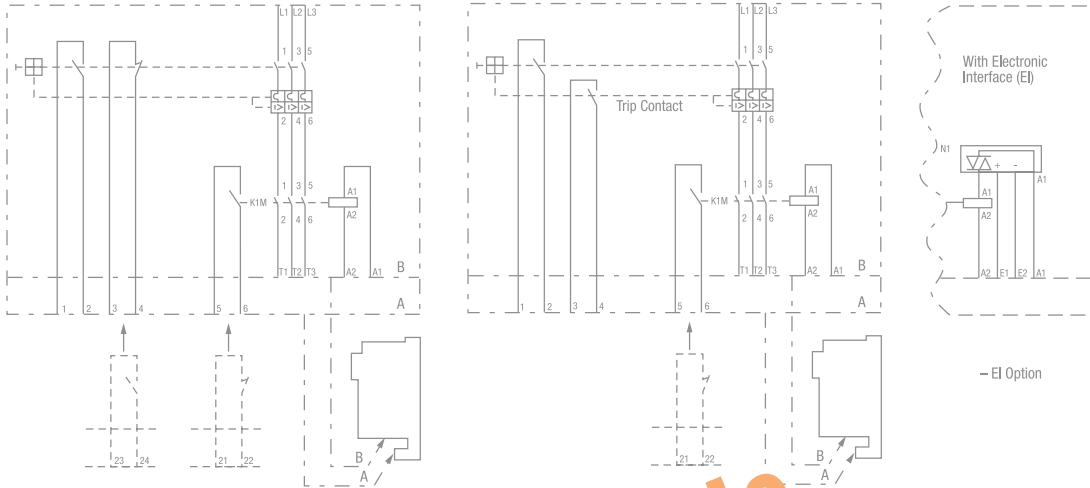

F
Ecombo Circuit Controllers

Section Obsolete
See pages F1.40 - F1.55



CK7-10...43

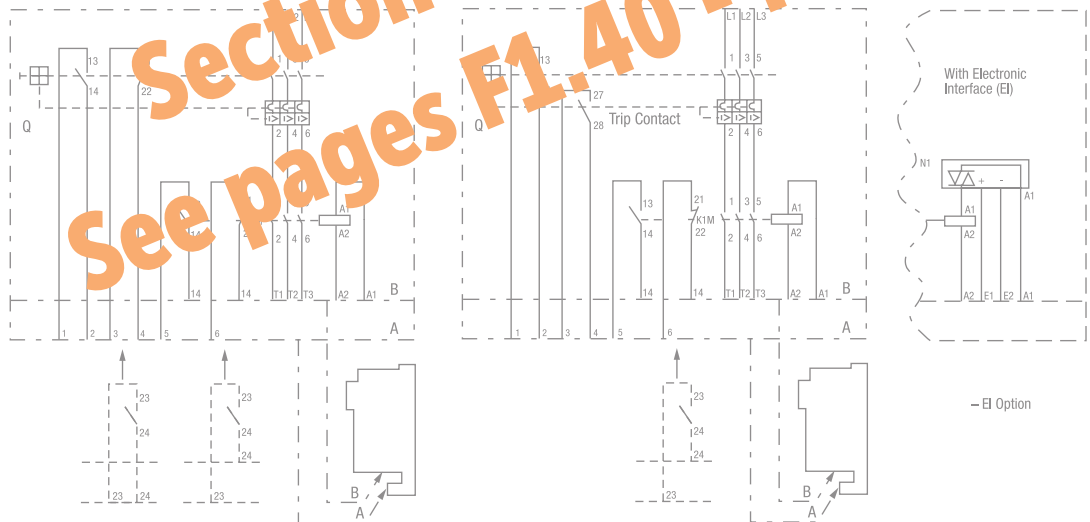

3-Component ECombo Starters

CLT7-9...43 Typical Diagram

CUSTOMER TO SUPPLY PROPER BRANCH
CIRCUIT PROTECTION AS PER LOCAL CODES.
(USE 75°C COPPER WIRE ONLY)

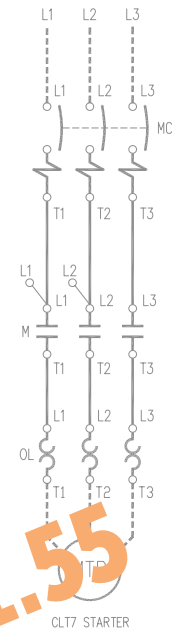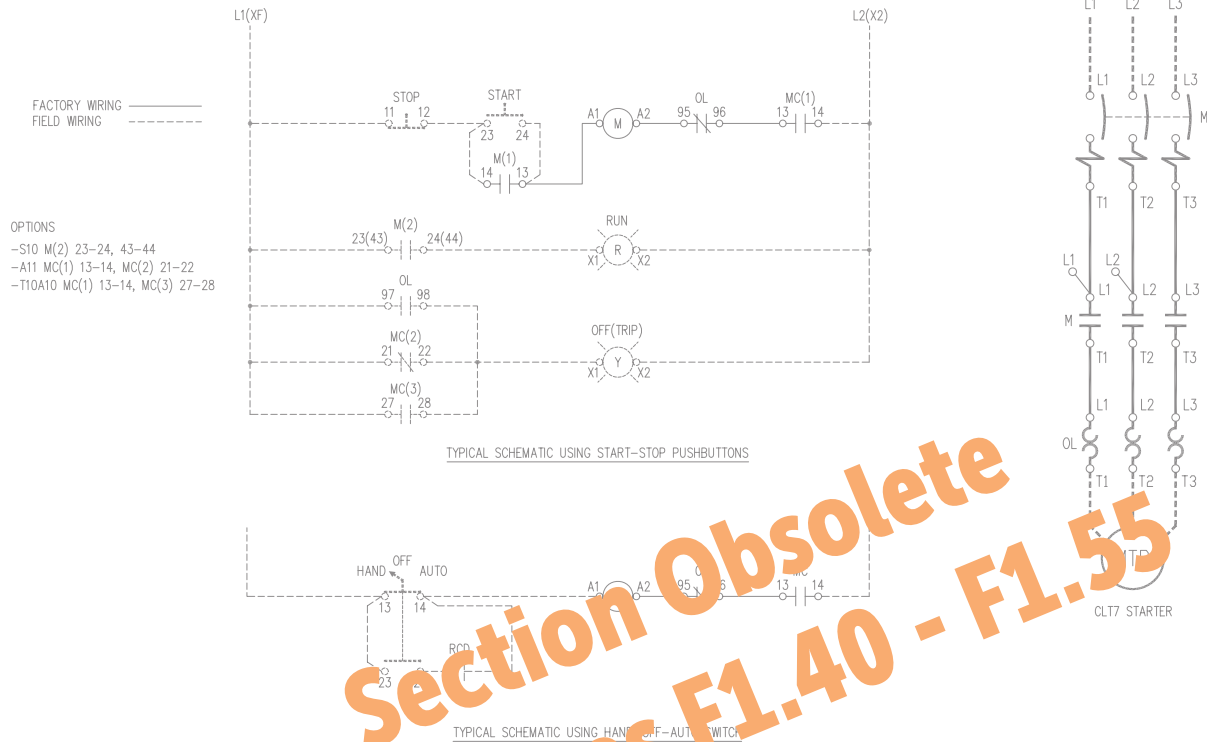

NOTES:

- 1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER.
- 2) MC: KTB7 MOTOR CONTROLLER.


Section Obsolete
See pages F1.40 - F1.55

F
ECombo Circuit Controllers


Ecombo Combination Starters

CL8 and CLU8 Ecombo Starters with KT7-25S

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

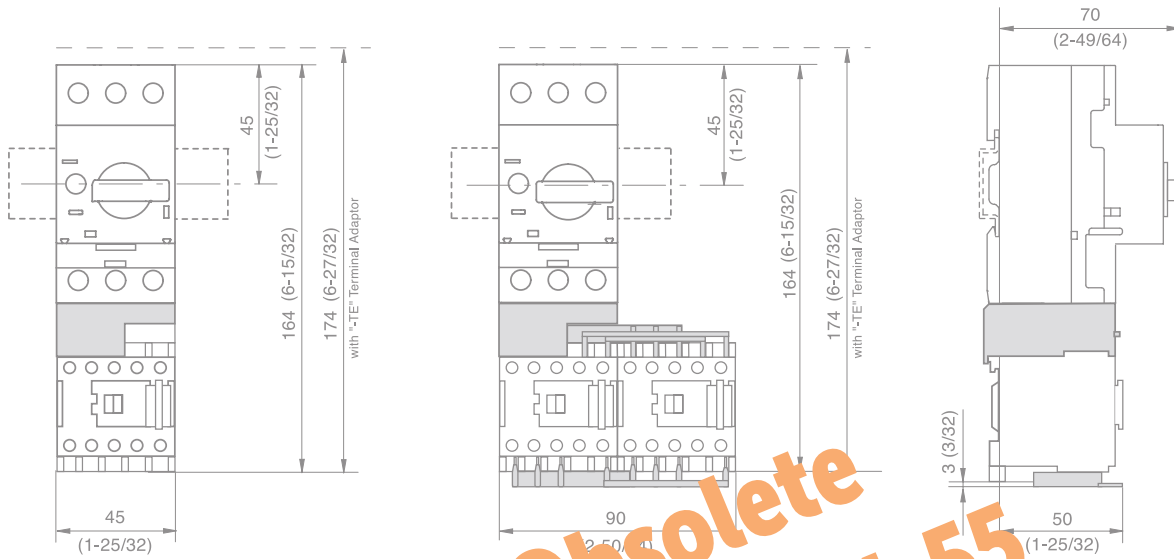

CL7-9...23(E) and CLU7-9...23(E) Ecombo Starters with KT7-25S

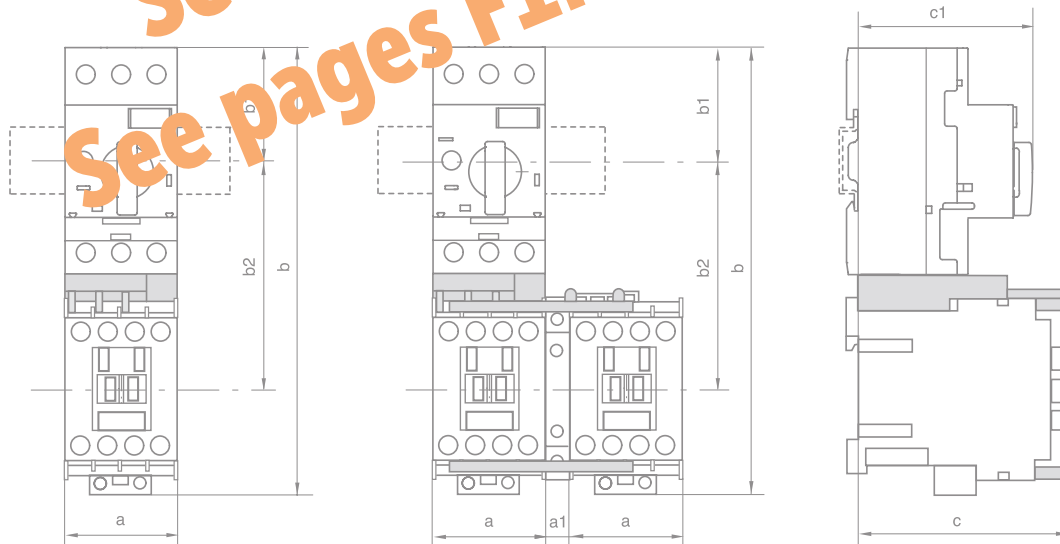


| Catalog Number ❶ | a | a1 | b | b1 | b2 | c | c1 |
|---|--------------|------------|---------------|--------------|----|----------------|--------------|
| CL7-9(E)...CL7-23(E) | 45 (1-25/32) | 0 | 178 (7) | 45 (1-25/32) | ~ | 83.5 (3-19/64) | 70 (2-49/64) |
| CL7-9(E)...CL7-23(E) with -TE1 Terminal Adaptor | 45 (1-25/32) | 0 | 188 (7-13/32) | 55 (2-5/32) | ~ | 83.5 (3-19/64) | 70 (2-49/64) |
| CLU7-9(E)...CLU7-23(E) | 45 (1-25/32) | 10 (25/64) | 178 (7) | 45 (1-25/32) | ~ | 83.5 (3-19/64) | 70 (2-49/64) |
| CLU7-9(E)...CLU7-23(E) with -TE1 Terminal Adaptor | 45 (1-25/32) | 10 (25/64) | 188 (7-13/32) | 55 (2-5/32) | ~ | 83.5 (3-19/64) | 70 (2-49/64) |

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

Ecombo Combination Starters

CL7-30...43(E) and CLU7-30...43(E) Ecombo Starters with KT7-45H

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

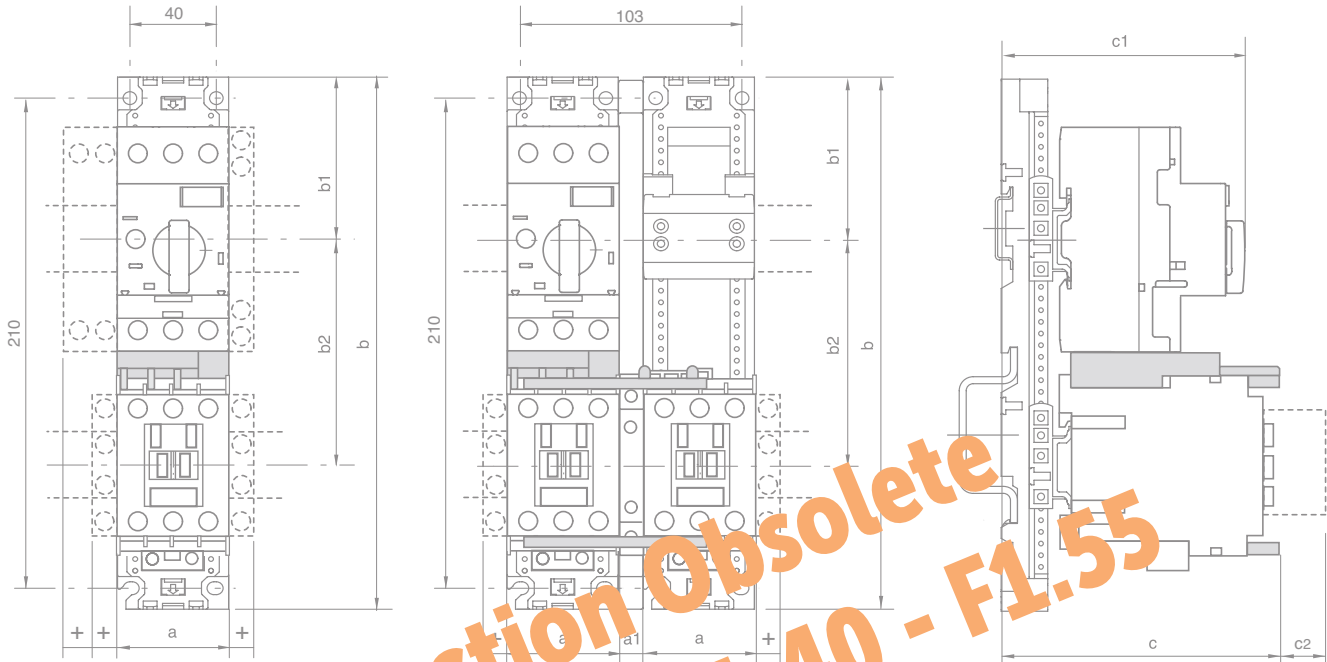

| Catalog Number ①② | a | a1 | b | b1 | b2 | c | c1 | c2 | + |
|-------------------|------------|----|------------|-----------|------------|--------------|--------------|-----------|---|
| CL7-30(E) | 54 (2.125) | ~ | 228 (8.97) | 69 (2.72) | 105 (4.30) | 122.5 (4.82) | 134.5 (5.29) | ~ | 9 |
| CL7-37(E) | 54 (2.125) | ~ | 228 (8.97) | 69 (2.72) | 105 (4.30) | 122.5 (4.82) | 134.5 (5.29) | ~ | 9 |
| CL7-43(E) | 54 (2.125) | ~ | 228 (8.97) | 69 (2.72) | 105 (4.30) | 136 (5.35) | 137 (5.39) | 31 (1.22) | 9 |
| CLU7-30(E) | 54 (2.125) | 9 | 228 (8.97) | 69 (2.72) | 105 (4.30) | 122.5 (4.82) | 134.5 (5.29) | ~ | 9 |
| CLU7-37(E) | 54 (2.125) | 9 | 228 (8.97) | 69 (2.72) | 105 (4.30) | 122.5 (4.82) | 134.5 (5.29) | ~ | 9 |
| CLU7-43(E) | 54 (2.125) | 9 | 228 (8.97) | 69 (2.72) | 105 (4.30) | 136 (5.35) | 137 (5.39) | 31 (1.22) | 9 |

① CL7-30...43(E) and CLU7-30...43(E) include W-32490 Mounting Module. CLU7 includes W-32955 Spacer.

② Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V... 250V Electronic DC coils. See page A86 for details.

Section Obsolete
See pages F1.40 - F1.55


F

Ecombo Circuit Controllers

EcomboPlus Combination Starters

CK7-9...23 and CKU7-9...23 EcomboPlus Starters

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

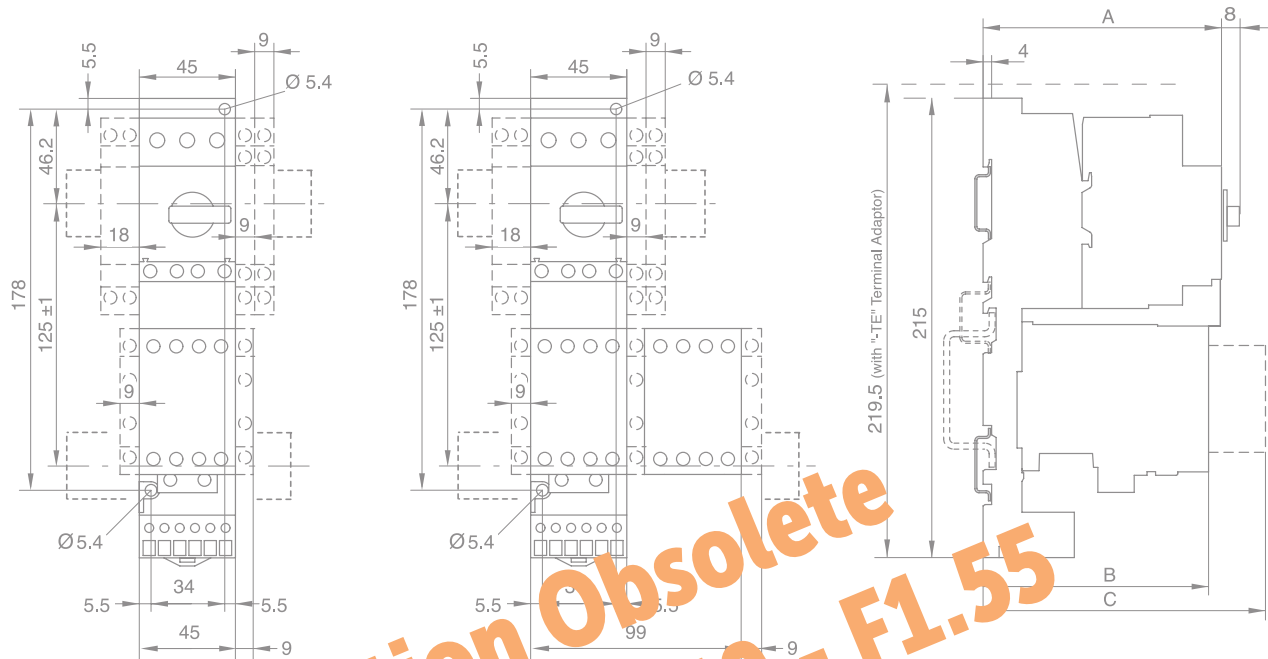

Section Obsolete
See pages F1.40 - F1.55


| | | A (mm) | B (mm) | | |
|---------------------------|---------|--------|--------|---|--------------------------------------|
| Direct on-line starters ① | | | | | |
| CK7-9(E) | KT7-25S | 112 | 107 | → | CA7-PV, CS7-PV CZE-7, CZA7 CV7 |
| CK7-12(E) | | | | | |
| CK7-16(E) | | | | | |
| CK7-23(E) | | | | | |
| Reversing Starters | | | | | |
| CKU7-9 | KT7-25S | 112 | 107 | → | CA7-PV, CS7-PV CZE7, CZA7 CV7 |
| CKU7-12 | | | | | |
| CKU7-16 | | | | | |
| CKU7-23 | | | | | |

① Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

EcomboPlus Combination Starters

CK7-9...23

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

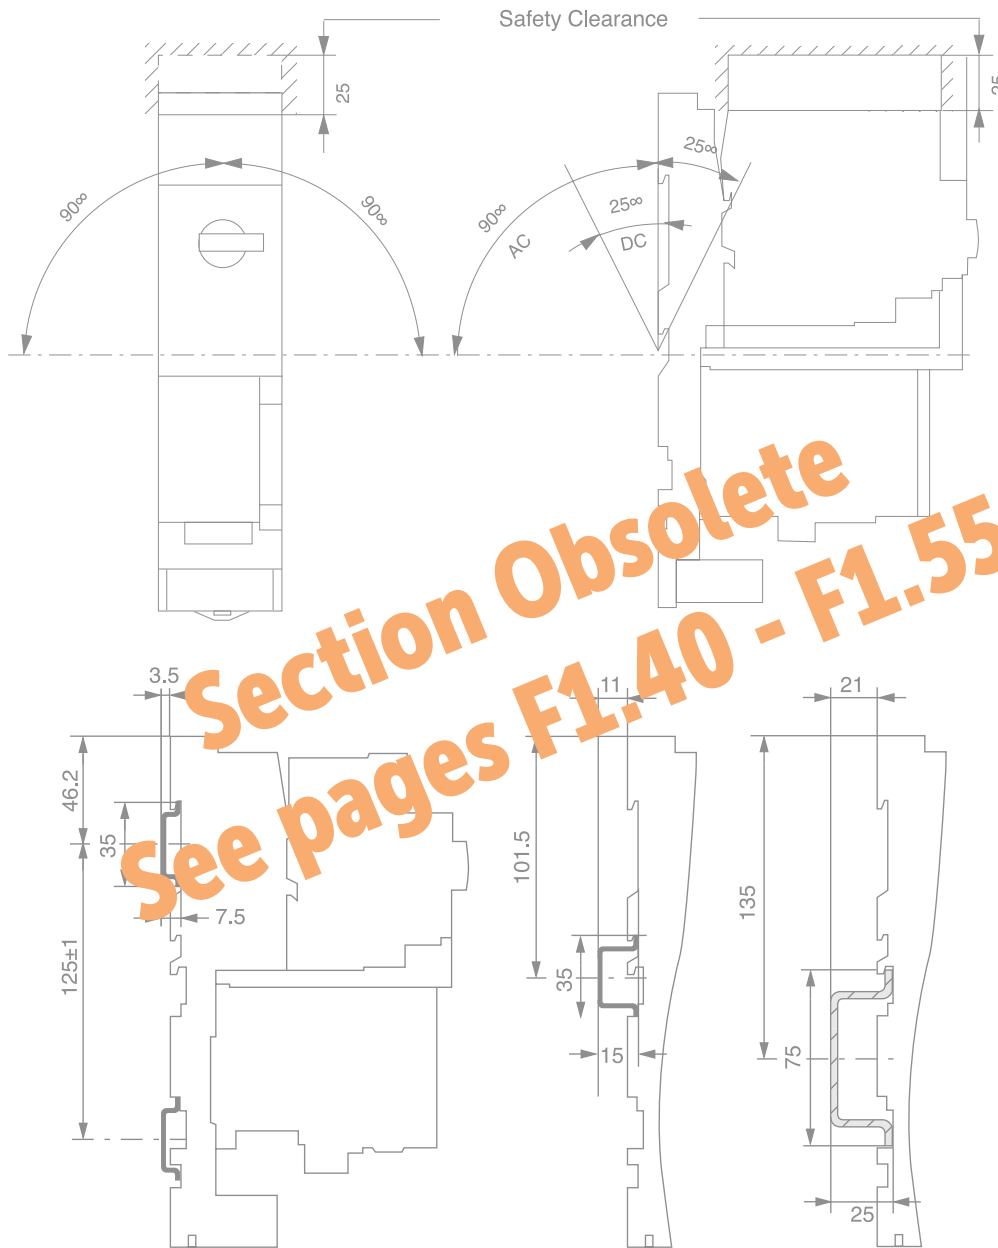

Section Obsolete
See pages F1.40 - F1.55


F

Ecombo Circuit Controllers

EcomboPlus Combination Starters

CK7-30...37

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

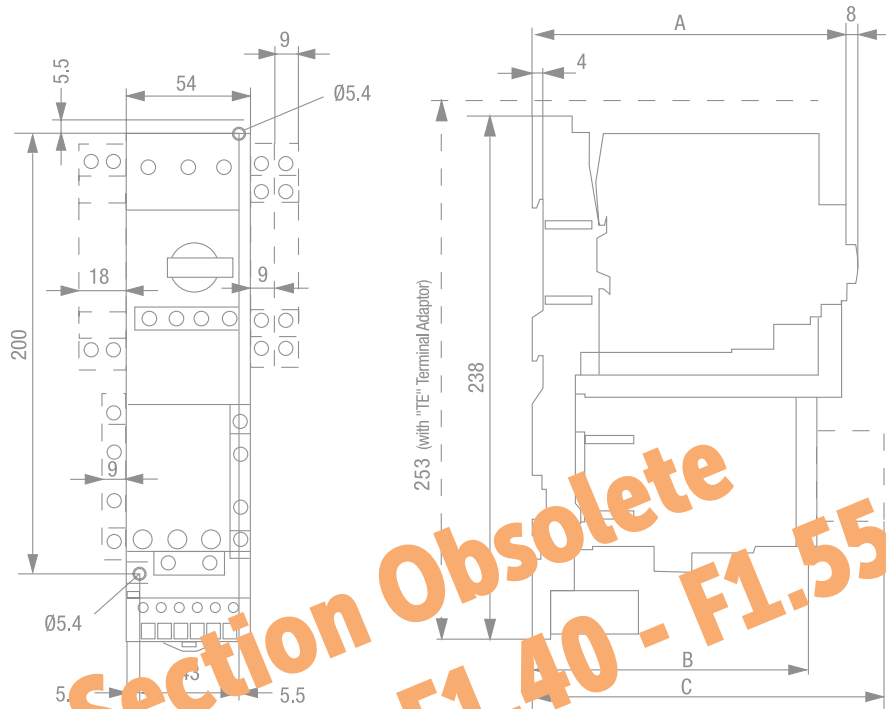

Section Obsolete
See pages F1.40 - F1.55


| | | A (mm) | B (mm) | | C (mm) |
|-------------|---------|--------|--------|--------|--------|
| CK7-30(E) ① | KT7-45H | 135 | 124 | CA7-PV | 154.5 |
| CK7-37(E) ① | | | | CZE7 | 173.5 |
| | | | | CV7 | 176.5 |

① Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

EcomboPlus Combination Starters

CK7-43

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

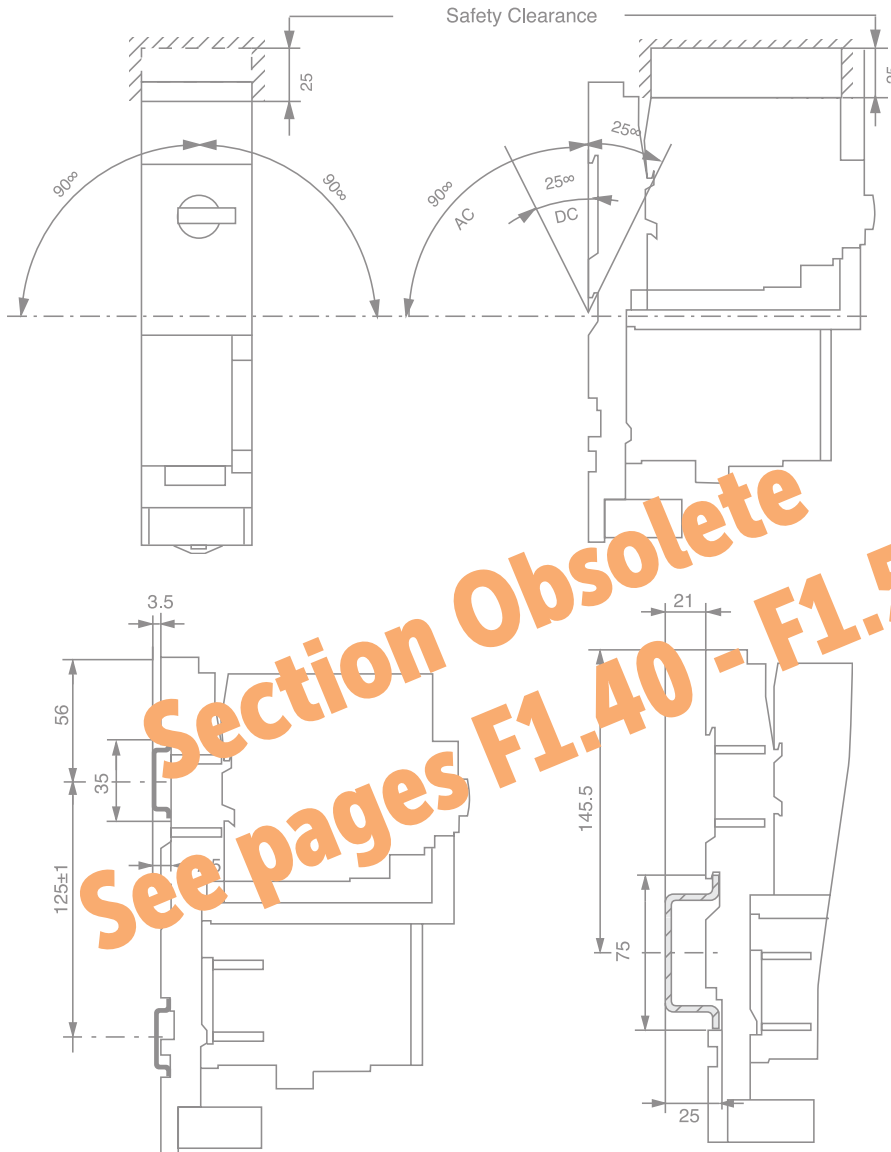

Section Obsolete
See pages F1.40 - F1.55

See previous page for dimensions A , B & C locations

| | | A (mm) | B (mm) |
|--|--|--------|--------|
| | | 135 | 118.5 |

| | C (mm) |
|--|--------|
| | 157 |
| | 176 |
| | 179 |

① Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

Non-Reversing Three Component Combination Starters ③




Section Obsolete
See pages F1.40 - F1.55

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.


- ① With additional side mount auxiliary or trip contact(s)
- ② With CEP7-E* Side Mount Modules
- ③ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

Reversing Three Component Combination Starters ②


KTB7-25S + CAU7-9...37 + CEP7-ED1/EE

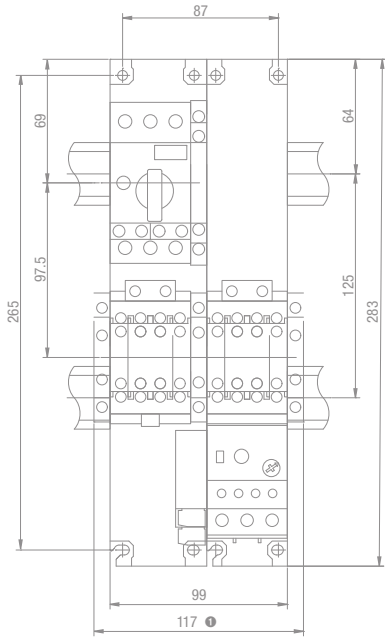

KTB7-45H + CA7-30...37 + CEP7-EE

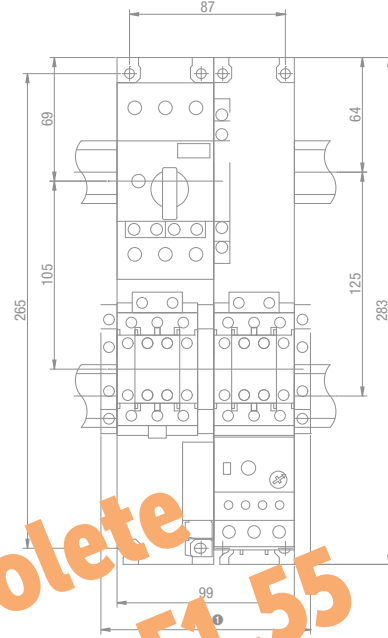

KTB7-45H + CA7-43...37 + CEP7-EE

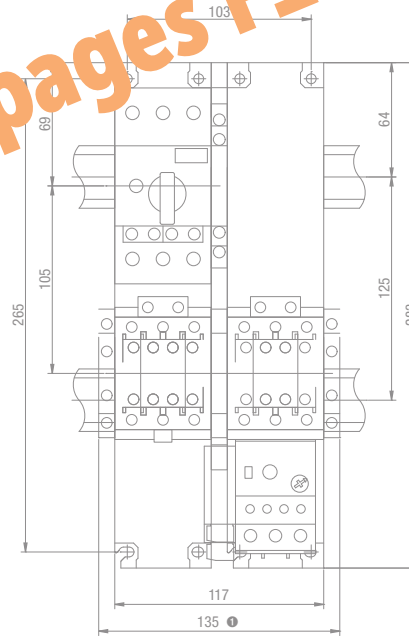

Section Obsolete
See pages F1.40 - F1.55

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

- ① With additional side mount auxiliary contact(s)
- ② Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V...250V Electronic DC coils. See page A86 for details.

Notes

**Section Obsolete
See pages F1.40 - F1.55**


Enclosed Motor Controllers and Molded Case Circuit Breakers




KTA7 Type-E Self Protected Manual Motor Controllers Page F89



Explosion-Proof Motor Controllers



KTA7_EX Page F93

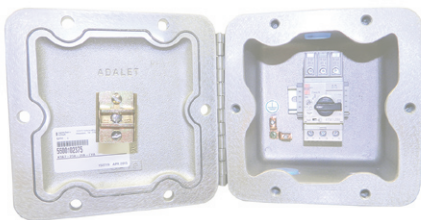

KTA7_EZ Page F94

The following pages contain a selection of single enclosed KTA7 & KTC7 motor controllers which can be applied as an individual Manual Self-Protected Combination Motor Controller or as an individual Manual Motor Starter dependent on the ratings of the individual unit.

- A Self-protected Combination Motor Controller (UL508 Construction Type E) performs all the functions of a Manual Combo starter including a UL approved means "Disconnect" with lockable and defeatable handle mechanism, short-circuit protection and overload protection for motor applications.
- A UL508 Manual Motor Controller is a manual motor starter including a motor disconnect combined with an overload relay.

Both can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements. The section that follows lists non-metallic enclosures, metal enclosures and explosion proof enclosures.

Enclosed Molded Case Circuit Breakers

The following pages contain a selection of individual enclosed KTU7 molded case circuit breakers for the protection of non-motor loads. KTU7 is a 480Y/277 Volt or 600Y/347 volt UL489 approved circuit breaker and the selection of enclosures or combined with matching environmentally approved thru-the-door handle disconnect mechanism which also complies with UL489 standards. KTU7 offers at least 65 KAIC withstand ratings which exceeds those offered by many 600 Volt Class Molded Case Circuit Breakers which



KTU7 Molded Case Circuit Breakers Page F95

are larger and more expensive. Enclosed KTU7 can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements.

Enclosed Type E/F Combination Starters

KTA7 or KTC7 can be applied in combination with a CA7 contactor for remote control and an enclosure with matching environmentally approved thru-the-door handle disconnect mechanism to meet all requirements for a Construction Type E or F Combination Starter. The following pages contain a selection of individual Combo starters which are smaller and less expensive than Classic




CX7 Ecombo KWIKStarter Page F98

Construction Type A (if usable), or Type B (Thermal-magnetic) Molded Case Circuit Breaker) offered in Section C of this catalog. The following types are offered:

- Non-metallic enclosed Combo KwikStarter CX7 and CXU7 with AC or DC coils available as factory assembled or in kit form for field assembly
- Metallic enclosed Combo CX7 and CXU7 with AC or DC coils
- Explosion-proof enclosed CX7 and CXU7 with AC or DC coils

A variety of modifications are available.

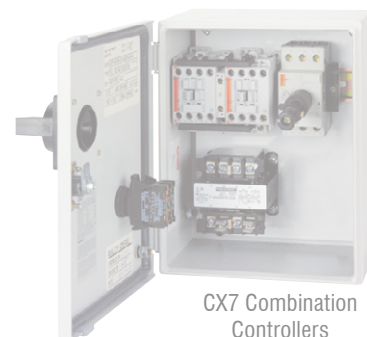

CX7 Combination Controllers Page F105

Section Obsolete - F1.88
See pages F1.56 - F1.88

Enclosed KTA7 - IP65

| Amp / Horsepower Rating | | | | | | Non-metallic (IP65) Enclosure | | Dimension Code | |
|--|-------|-------------|-------|-------|------|-------------------------------|-----------------------|-------------------|------------------|
| Max. Horsepower 123 | | | | | | O/L Relay Ampere Range | Magnetic Res. Current | | Catalog Number 4 |
| Single Phase | | Three Phase | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | |
| KTA7-25S/32S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-CG | AY |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-CG | AY |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-CG | AY |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-CG | AY |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-CG | AY |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-CG | AY |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-CG | AY |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-CG | AY |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25S-6.3A-CG | AY |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25S-10A-CG | AY |
| 1 | 3 | 5 | 5 | 15 | 15 | 10...16 | 208 | KTA7-25S-16A-CG | AY |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25S-20A-CG | AY |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 375 | KTA7-25S-25A-CG 5 | AY |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 23...25 | 409 | KTA7-32S-29A-CG 5 | AY |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32S-32A-CG 5 | AY |



Includes:

- Non-metallic (IP65) enclosure with integrated IP65 operator – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) “Type E” Self-protected Combination Manual Controller 5
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black IP65 handle 4 5

Enclosure Only

| Description | Catalog Number |
|----------------------|----------------|
| Gray/Black handle | KT7-AYTG2 |
| Red/Yellow handle | KT7-AYTJ2 |
| Accessory | |
| Ground (PE) Terminal | KS7-AYMTN |

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|--|---------------------------|
| KT7 Auxiliary Trip Contacts, Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT7 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |


Section Obsolete
See pages F1.56 - F1.68

- Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.
- KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.
- A red and yellow handle may be selected instead of the standard gray and black handle. Change “CG” suffix to “CJ”. Ex: Change KTA7-25S-0.16-CG to KTA7-25S-0.16-CJ.
- Handles are built-in to the enclosure and are not available as components.
- Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

Enclosed KTA7 - Type 4 / 4X / 12
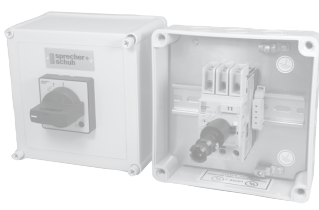
| Amp / Horsepower Rating | | Non-metallic, Type 4 / 4X / 12 Enclosure | | | | | | | | | | | | | | | |
|---|-------------|--|------|------------------------|-----------------------|------------------|----------------|------------------------|-----------------------|------------------|----------------|------|------|------|------|---|--|
| <table border="1"> <tr> <th colspan="2">Max. Horsepower ①②③</th> <th rowspan="2">O/L Relay Ampere Range</th> <th rowspan="2">Magnetic Res. Current</th> <th rowspan="2">Catalog Number ④</th> <th rowspan="2">Dimension Code</th> </tr> <tr> <th>Single Phase</th> <th>Three Phase</th> </tr> <tr> <td>115V</td> <td>230V</td> <td>200V</td> <td>230V</td> <td>460V</td> <td>575V</td> </tr> </table> | | Max. Horsepower ①②③ | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ④ | Dimension Code | Single Phase | Three Phase | 115V | 230V | 200V | 230V | 460V | 575V |  | |
| | | Max. Horsepower ①②③ | | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ④ | Dimension Code | | | | | | |
| Single Phase | Three Phase | | | | | | | | | | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | | | | | | | | | |

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTA7 “Type E” Self-protected Combination Manual Controller (Standard Interrupting Capacity) ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT7 Auxiliaries & Trip Contacts, Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC | -T10A01 |
| 1 NC SC+OL + 1 NO | -T10A10 |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT7 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

| KTA7-25S/32S Standard Interrupting Capacity | | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ④ | Dimension Code |
|---|-------------|---------|---------|-------|-------|------------------------|-----------------------|-------------------|----------------|
| Single Phase | Three Phase | | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-VG | Q5 |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-VG | Q5 |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-VG | Q5 |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-VG | Q5 |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-VG | Q5 |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-VG | Q5 |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-VG | Q5 |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-VG | Q5 |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 ⑤ | 4...6.3 | 82 | KTA7-25S-6.3A-VG | Q5 |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 ⑤ | 6.3...10 | 130 | KTA7-25S-10A-VG | Q5 |
| 1 | 3 | 5 | 5 | 10 | 15 ⑤ | 10...16 | 208 | KTA7-25S-16A-VG | Q5 |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 ⑤ | 14.5...20 | 260 | KTA7-25S-20A-VG | Q5 |
| 2 | 3 | 7-1/2 ⑤ | 7-1/2 ⑤ | 20 ⑤ | 25 ⑤ | 18...25 | 325 | KTA7-25S-25A-VG ⑤ | Q5 |
| 2 | 5 | 7-1/2 ⑤ | 10 ⑤ | 20 ⑤ | 25 ⑤ | 24...29 | 406 | KTA7-32S-29A-VG ⑤ | Q5 |
| 3 | 5 | 7-1/2 ⑤ | 10 ⑤ | 25 ⑤ | 30 ⑤ | 27...32 | 448 | KTA7-32S-32A-VG ⑤ | Q5 |
| KTA7-25H/32H High Interrupting Capacity | | | | | | | | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25H-2.5A-VG | Q6 |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25H-4A-VG | Q6 |
| 1/4 | 1/2 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25H-6.3A-VG | Q6 |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25H-10A-VG | Q6 |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A-VG | Q6 |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 ⑥ | 14.5...20 | 260 | KTA7-25H-20A-VG | Q6 |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 ⑥ | 18...25 | 325 | KTA7-25H-25A-VG | Q6 |
| 2 | 5 | 7-1/2 ⑥ | 10 ⑥ | 20 ⑥ | 25 ⑥ | 24...29 | 406 | KTA7-32H-29A-VG ⑥ | Q6 |
| 3 | 5 | 7-1/2 ⑥ | 10 ⑥ | 25 ⑥ | 30 ⑥ | 27...32 | 448 | KTA7-32H-32A-VG ⑥ | Q6 |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-VG | Q7 |
| 1 | 3 | 5 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-VG | Q7 |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 15 | 14.5...20 | 260 | KTA7-45H-20A-VG | Q7 |
| 2 | 3 | ~ | 10 | 20 | 20 | 18...25 | 325 | KTA7-45H-25A-VG | Q7 |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 23...32 | 416 | KTA7-45H-32A-VG | Q7 |
| 3 | 7-1/2 | 10 | 15 | 30 | 40 ⑦ | 32...45 | 585 | KTA7-45H-45A-VG | Q7 |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

③ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change “VG” suffix to “VJ”. Ex: Change KTA7-25S-0.16-VG to KTA7-25S-0.16-VJ.

⑤ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed Motor Circuit Controllers

Section Obsolete
See pages F1.56 - F1.88

Enclosed KTA7 - Type 12

| Amp / Horsepower Rating | | | | | | | Painted Steel, Type 12 Enclosure | | Dimension Code |
|--|-------|--------------------|--------------------|-----------------|-----------------|------------------------|----------------------------------|-------------------|----------------|
| Max. Horsepower ①②③ | | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ④ | |
| Single Phase | | Three Phase | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | |
| KTA7-25S/32S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-DG | L |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-DG | L |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-DG | L |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-DG | L |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-DG | L |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-DG | L |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-DG | L |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-DG | L |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 [ⓐ] | 4...6.3 | 82 | KTA7-25H-6.3A-DG | L |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 [ⓐ] | 6.3...10 | 130 | KTA7-25H-10A-DG | L |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A-DG | L |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 [ⓐ] | 14.5...20 | 260 | KTA7-25H-20A-DG | L |
| 2 | 3 | 7-1/2 [ⓐ] | 7-1/2 [ⓐ] | 20 [ⓐ] | 20 [ⓐ] | 18...25 | 325 | KTA7-25H-25A-DG ⑤ | L |
| 2 | 5 | 7-1/2 [ⓐ] | 10 [ⓐ] | 20 [ⓐ] | 25 [ⓐ] | 24...29 | 406 | KTA7-32S-29A-DG ⑤ | L |
| 3 | 5 | 7-1/2 [ⓐ] | 10 [ⓐ] | 25 [ⓐ] | 30 [ⓐ] | 27...32 | 448 | KTA7-32S-32A-DG ⑤ | L |
| KTA7-25H/32H High Interrupting Capacity | | | | | | | | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25H-2.5A-DG | L |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25H-4A-DG | L |
| 1/4 | 1/2 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25H-6.3A-DG | L |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25H-10A-DG | L |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A-DG | L |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 [ⓐ] | 14.5...20 | 260 | KTA7-25H-20A-DG | L |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 [ⓐ] | 18...25 | 325 | KTA7-25H-25A-DG | L |
| 2 | 5 | 7-1/2 [ⓐ] | 10 [ⓐ] | 20 [ⓐ] | 25 [ⓐ] | 24...29 | 406 | KTA7-32H-29A-DG ⑤ | L |
| 3 | 5 | 7-1/2 [ⓐ] | 10 [ⓐ] | 25 [ⓐ] | 30 [ⓐ] | 27...32 | 448 | KTA7-32H-32A-DG ⑤ | L |



Includes:

- Type 12 enclosure – dusttight
- KT7-25S/32S (Standard Interrupting Capacity) “Type E” Self-protected Combination Manual Controller ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT7 Auxiliaries & Trip Contacts, Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC | -T10A01 |
| 1 NO SC+OL + 1 NO | -T10A10 |
| Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO SC+OL Auxiliary | -AS11 |
| Additional KT7 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

- ③ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.
- ④ A red and yellow handle may be selected instead of the standard gray and black handle. Change “DG” suffix to “DJ”. Ex: Change KTA7-25S-0.16-DG to KTA7-25S-0.16-DJ.
- ⑤ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Section Obsolete
See pages F1.56 - F1.88

F Enclosed Motor Circuit Controllers

Enclosed KTA7 - Type 4 / 12

| Amp / Horsepower Rating | | | | | | | Painted Steel, Type 4 / 12 Enclosure | | Dimension Code | | |
|---|-------|-------------|-------|-------|-------|------------------------|--------------------------------------|-------------------|----------------|------|------|
| Max. Horsepower ①②③ | | | | | | O/L Relay Ampere Range | Magnetic Res. Current | Catalog Number ④ | | | |
| Single Phase | | Three Phase | | | | | | | 115V | 230V | 200V |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-WG | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-WG | W6 | | |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-WG | W6 | | |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-WG | W6 | | |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-WG | W6 | | |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-WG | W6 | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-WG | W6 | | |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-WG | W6 | | |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25S-6.3A-WG | W6 | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25S-10A-WG | W6 | | |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25S-16A-WG | W6 | | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25S-20A-WG | W6 | | |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25S-25A-WG | W6 | | |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32S-29A-WG | W6 | | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32S-32A-WG | W6 | | |
| KTA7-25H/32H High Interrupting Capacity | | | | | | | | | | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25H-2.5A-WG | W6 | | |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25H-4A-WG | W6 | | |
| 1/4 | 1/2 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25H-6.3A-WG | W6 | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25H-10A-WG | W6 | | |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A-WG | W6 | | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25H-20A-WG | W6 | | |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25H-25A-WG | W6 | | |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32H-29A-WG | W6 | | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32H-32A-WG | W6 | | |
| KTA7-45H High Interrupting Capacity | | | | | | | | | | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-WG | R/F | | |
| 1 | 3 | 5 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-WG | R/F | | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 15 | 14.5...20 | 260 | KTA7-45H-20A-WG | R/F | | |
| 2 | 3 | ~ | 10 | 20 | 20 | 18...25 | 325 | KTA7-45H-25A-WG | R/F | | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 23...32 | 416 | KTA7-45H-32A-WG | R/F | | |
| 3 | 7-1/2 | 10 | 15 | 30 | 40 | 32...45 | 585 | KTA7-45H-45A-WG | R/F | | |

Includes:

- Type 4 / 12 enclosure – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) “Type E” Self-protected Combination Manual Controller ⑤
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT7 Auxiliaries & Trip Contacts, Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC | -T10A01 |
| 1 NO SC+OL + 1 NO | -T10A10 |
| KT7 Auxiliaries & Trip Contacts, Side Mount 600V max. | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

③ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change “WG” suffix to “WJ”. Ex: Change KTA7-25S-0.16-WG to KTA7-25S-0.16-WJ.


⑤ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed Motor Circuit Controllers

Section Obsolete
See pages F1.56 - F1.88

KTA7 Explosion Proof Motor Controllers - NEMA Type 7/9

| Amp / Horsepower Rating | | | | | | | O/L Relay Ampere Range | | Magnetic Res. Current | Catalog Number | Dimension Code |
|-------------------------|-------|-------------|-------|-------|------|-------------|------------------------|-------------------|-----------------------|----------------|----------------|
| Max. Horsepower ①②③ | | | | | | | Interrupting Capacity | | | | |
| Single Phase | | Three Phase | | | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-EX | EX | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-EX | EX | | |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-EX | EX | | |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-EX | EX | | |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-EX | EX | | |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-EX | EX | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-EX | EX | | |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-EX | EX | | |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25S-6.3A-EX | EX | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 110 | KTA7-25S-10A-EX | EX | | |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 160 | KTA7-25S-16A-EX | EX | | |
| 1-1/2 | 3 | 5 | 7-1/2 | 10 | 15 | 14...20 | 260 | KTA7-25S-20A-EX | EX | | |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 25 | 18...25 | 325 | KTA7-25S-25A-EX | EX | | |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 440 | KTA7-32S-29A-EX | EX | | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 28...35 | 440 | KTA7-32S-32A-EX | EX | | |



Includes:

- Class I, Div 1, 2, Group C, D
Class II, Div 1, 2, Group E, F & G enclosure
Class III
NEMA Type 7/9
- KT7-25S/32S (Standard interrupting capacity) "Type E" Self-protected Combination Manual Motor Controller ④
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)

Modifications (Factory Assembled) ⑤

| KT7 Auxiliaries & Trip Contacts | Add Suffix to Cat. Number |
|---------------------------------|---------------------------|
| Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A10 |
| Side Mount 300V max. | |
| 1 NO + 1 NC Auxiliary | -AS11 |
| 2 NO Auxiliaries | -AS20 |
| 1 NC SC+OL + 1 NO Auxiliary | -R10 |
| 1 NC SC+OL + 1 NC Auxiliary | -R11 |
| Enclosure Modifications | |
| Breather/Drain | -BD |

Section Obsolete - FL 88
See pages FL 56 - FL 88

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.


③ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

⑤ -UA* and -AA* options not possible in the -EX Enclosure.

KTA7 Explosion Proof Motor Controllers – NEMA Type 4/7/9 with Gasket

| Amp / Horsepower Rating | | | | | | O/L Relay Ampere Range | | Magnetic Res. Current | Catalog Number | Dimension Code |
|--|-------|-------------|-------|-------|-------|------------------------|-----|-----------------------|----------------|----------------|
| Max. Horsepower ①②③ | | | | | | | | | | |
| Single Phase | | Three Phase | | | | | | | | |
| 115V | 230V | 200V | 230V | 460V | 575V | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | KTA7-25S-0.16A-EY | EY | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | KTA7-25S-0.25A-EY | EY | |
| ~ | ~ | ~ | ~ | ~ | 1/4 | 0.25...0.40 | 5.2 | KTA7-25S-0.4A-EY | EY | |
| ~ | ~ | ~ | ~ | 1/4 | 1/3 | 0.40...0.63 | 8.2 | KTA7-25S-0.63A-EY | EY | |
| ~ | ~ | ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | KTA7-25S-1A-EY | EY | |
| ~ | 1/10 | 1/4 | 1/3 | 1 | 1 | 1.0...1.6 | 21 | KTA7-25S-1.6A-EY | EY | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | KTA7-25S-2.5A-EY | EY | |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25S-4A-EY | EY | |
| 1/4 | 3/4 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25S-6.3A-EY | EY | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25S-10A-EY | EY | |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25S-16A-EY | EY | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25S-20A-EY | EY | |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25S-25A-EY | EY | |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32S-29A-EY | EY | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32S-32A-EY | EY | |
| KTA7-25H High Interrupting Capacity | | | | | | | | | | |
| 1/10 | 1/6 | 1/2 | 3/4 | 1-1/2 | 2 | 1.0...2.5 | 33 | KTA7-25H-2.5A-EY | EY | |
| 1/8 | 1/3 | 1 | 1 | 3 | 3 | 2.5...4 | 52 | KTA7-25H-4A-EY | EY | |
| 1/4 | 1/2 | 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | KTA7-25H-6.3A-EY | EY | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | KTA7-25H-10A-EY | EY | |
| 1 | 3 | 5 | 5 | 10 | 15 | 10...16 | 208 | KTA7-25H-16A-EY | EY | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | KTA7-25H-20A-EY | EY | |
| 2 | 3 | 7-1/2 | 7-1/2 | 20 | 20 | 18...25 | 325 | KTA7-25H-25A-EY | EY | |
| 2 | 5 | 7-1/2 | 10 | 20 | 25 | 24...29 | 406 | KTA7-32H-29A-EY | EY | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 27...32 | 448 | KTA7-32H-32A-EY | EY | |
| KTA7-45H High Interrupting Capacity | | | | | | | | | | |
| 1/2 | 1-1/2 | 3 | 3 | 7-1/2 | 7-1/2 | 6.3...10 | 130 | KTA7-45H-10A-EZ | EZ | |
| 1 | 3 | 5 | 5 | 10 | 10 | 10...16 | 208 | KTA7-45H-16A-EZ | EZ | |
| 1-1/2 | 3 | 5 | 7-1/2 | 15 | 15 | 14.5...20 | 260 | KTA7-45H-20A-EZ | EZ | |
| 2 | 3 | ~ | 10 | 20 | 20 | 18...25 | 325 | KTA7-45H-25A-EZ | EZ | |
| 3 | 5 | 7-1/2 | 10 | 25 | 30 | 23...32 | 416 | KTA7-45H-32A-EZ | EZ | |
| 3 | 7-1/2 | 10 | 15 | 30 | 40 | 32...45 | 585 | KTA7-45H-45A-EZ | EZ | |



EY Enclosure shown

Includes:

- Class I, Div 1, 2, Group C, D
Class II, Div 1, 2, Group E, F & G enclosure
Class III
- NEMA Type 4/7/9
- KT7 "Type E" Self-protected Combination Manual Motor Controller ④
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)

Modifications (Factory Assembled)

| Description | Add Suffix to Cat. Number |
|---|---------------------------|
| KT7 Auxiliaries & Trip Contacts, Front Mount 300V max. | |
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NO SC | -T10A01 |
| 1 NO SC+OL + 1 NC SC | -T10A10 |
| Side Mount 600V max. | |
| 2 NO Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| Additional KT7 Trip Contacts, Side Mount 600V max. | |
| 1 NO SC+OL+1 NO SC | -R00 |
| 1 NO SC+OL+1 NC SC | -R01 |
| 1 NC SC+OL+1 NO SC | -R10 |
| Accessories | |
| Undervoltage Release Module | -UA-* |
| Shunt Release Module | -AA-* |
| Enclosure Modifications | |
| Breather/Drain | -BD |

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |


- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range. See page F5 for KAIC ratings.
- ③ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote ① for device selection criteria.
- ④ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed Motor Circuit Controllers

Section Obsolete - F1.88
See pages F1.56 - F1.88

Enclosed KTU7 Circuit Breaker - Type 4 / 4X / 12

| Amp / Interrupt Rating | | Non-metallic, Type 4 / 4X / 12 Enclosure | | | | Dimension Code |
|---|-------------------|--|------------|------------|------------------|----------------|
| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number | |
| | | 240V | 480Y /277V | 600Y /347V | | |
| KTU7-D — High Interrupting Capacity – 2-Pole | | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-0.5-VG | Q6 ① |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-1-VG | |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-2-VG | |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-3-VG | |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-4-VG | |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-5-VG | |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-6-VG | |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-8-VG | |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-10-VG | |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-12-VG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-15-VG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-20-VG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-25-VG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-30-VG | |
| KTU7-D — High Interrupting Capacity – 3-Pole | | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-0.5-VG | Q6 ① |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-1-VG | |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-2-VG | |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-3-VG | |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-4-VG | |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-5-VG | |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-6-VG | |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-8-VG | |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-10-VG | |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-12-VG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-15-VG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-20-VG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-25-VG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-30-VG | |



Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ②

Modifications (Factory Assembled) ③

| KTU7 Auxiliaries & Trip Contacts - Front Mount 300V max. | Add Suffix to Cat. Number |
|--|---------------------------|
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

Section Obsolete
See pages F1.56 - F1.88

① KTU7 is 80% rated in this enclosure.
 ② A red and yellow handle may be selected instead of the standard black handle. Change "VG" suffix to "VJ". Ex: Change KTU7-D-2D-0.16-VG to KTU7-D-2D-0.16-VJ.
 ③ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed KTU7 Circuit Breaker - Type 12

| Amp / Interrupt Rating | | Painted Steel, Type 12 Enclosure | | | Catalog Number | Dimension Code |
|---|-------------------|----------------------------------|------------|------------|------------------|----------------|
| Fixed Thermal Current Rating [A] | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | | |
| | | 240V | 480Y /277V | 600Y /347V | | |
| KTU7-D — High Interrupting Capacity – 2-Pole | | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-0.5-DG | L |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-1-DG | |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-2-DG | |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-3-DG | |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-4-DG | |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-5-DG | |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-6-DG | |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-8-DG | |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-2D-10-DG | |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-12-DG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-15-DG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-20-DG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-25-DG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-2D-30-DG | |
| KTU7-D — High Interrupting Capacity – 3-Pole | | | | | | |
| 0.5 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-0.5-DG | L |
| 1.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-1-DG | |
| 2.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-2-DG | |
| 3.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-3-DG | |
| 4.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-4-DG | |
| 5.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-5-DG | |
| 6.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-6-DG | |
| 8.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-8-DG | |
| 10.0 | 15...20xIn | 100 | 100 | 50 | KTU7-D-3D-10-DG | |
| 12.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-12-DG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-15-DG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-20-DG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-25-DG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | KTU7-D-3D-30-DG | |



Includes:

- Type 12 enclosure – dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ②

Modifications (Factory Assembled) ③

| KT7 Auxiliaries & Trip Contacts - Front Mount, 20V max. | Add Suffix to Cat. Number |
|---|---------------------------|
| NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

Section Obsolete
See pages F1.56 - F1.88

① KTU7 is 80% rated in this enclosure.

② A red and yellow handle may be selected instead of the standard black handle. Change "DG" suffix to "DJ". Ex: Change KTU7-D-2D-0.16-DG to KTU7-D-2D-0.16-DJ.

③ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed Molded Case Circuit Breakers

Enclosed KTU7 Circuit Breaker - Type 4 / 12

| Fixed Thermal Current Rating [A] | | Magnetic Trip [A] | Interrupting Rating (60Hz) [KA] | | | Catalog Number | Dimension Code |
|---|------------|-------------------|---------------------------------|------------|------------|------------------|----------------|
| | | | 240V | 480Y /277V | 600Y /347V | | |
| KTU7-D — High Interrupting Capacity – 2-Pole | | | | | | | |
| 0.5 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-0.5-WG | W6 ① |
| 1.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-1-WG | |
| 2.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-2-WG | |
| 3.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-3-WG | |
| 4.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-4-WG | |
| 5.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-5-WG | |
| 6.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-6-WG | |
| 8.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-8-WG | |
| 10.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-2D-10-WG | |
| 12.0 | 15...20xIn | 65 | 65 | 65 | 25 | KTU7-D-2D-12-WG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-2D-15-WG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-2D-20-WG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-2D-25-WG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-2D-30-WG | |
| KTU7-D — High Interrupting Capacity – 3-Pole | | | | | | | |
| 0.5 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-0.5-WG | W6 ① |
| 1.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-1-WG | |
| 2.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-2-WG | |
| 3.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-3-WG | |
| 4.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-4-WG | |
| 5.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-5-WG | |
| 6.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-6-WG | |
| 8.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-8-WG | |
| 10.0 | 15...20xIn | | 100 | 100 | 50 | KTU7-D-3D-10-WG | |
| 12.0 | 15...20xIn | 65 | 65 | 65 | 25 | KTU7-D-3D-12-WG | |
| 15.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-3D-15-WG | |
| 20.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-3D-20-WG | |
| 25.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-3D-25-WG | |
| 30.0 | 15...20xIn | 65 | 65 | 25 | 25 | KTU7-D-3D-30-WG | |

Painted Steel, Type 4 / 12 Enclosure



Includes:

- Type 4/12 enclosure – watertight, dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ②

Modifications (Factory Assembled) ③

| KTU7 Auxiliaries & Trip Contacts - Front Mount 300V max. | Add Suffix to Cat. Number |
|--|---------------------------|
| 1 NO Auxiliary | -A10 |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

Section Obsolete
See pages F1.56 - F1.88

① KTU7 up to 15 Amp is 100% rated in this enclosure. KTU7 20...30 Amp is 80% rated.
 ② A red and yellow handle may be selected instead of the standard black handle. Change "WG" suffix to "WJ". Ex: Change KTU7-D-2D-0.16-WG to KTU7-D-2D-0.16-WJ.
 ③ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ⑥⑦

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | | Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ⑤ | Catalog Number ④⑥⑦⑧ | Dimension Code |
|--|-------|-------|-----|------|--|------|------|---------------------------|--|--|--|------------------------|---------------------------|---------|---------------------|----------------|
| | | | | | | | | Three Phase | | | | | | | | |
| | | | | 200V | 230V | 460V | 575V | | | | | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | | | | | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CX7-9-10-*AS0.16A-A10-PG▼ | | | | Q4 | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CX7-9-10-*AS0.25A-A10-PG▼ | | | | Q4 | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CX7-9-10-*AS0.4A-A10-PG▼ | | | | Q4 | | | | |
| ~ | ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CX7-9-10-*AS0.63A-A10-PG▼ | | | | Q4 | | | | |
| ~ | ~ | 1/2 | 3/4 | ~ | 0.63...1.0 | 13 | 5 | CX7-9-10-*AS1A-A10-PG▼ | | | | Q4 | | | | |
| ~ | ~ | 1 | 1 | ~ | 1.0...1.6 | 21 | 6 | CX7-9-10-*AS1.6A-A10-PG▼ | | | | Q4 | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | ~ | 1.6...2.5 | 33 | 7 | CX7-9-10-*AS2.5A-A10-PG▼ | | | | Q4 | | | | |
| 1 | 1 | 3 | 3 | ~ | 2.5...4 | 52 | 8 | CX7-9-10-*AS4A-A10-PG▼ | | | | Q4 | | | | |
| 1-1/2 | 2 | 5 | ~ | ~ | 4...6.3 | 82 | 9 | CX7-9-10-*AS6.3A-A10-PG▼ | | | | Q4 | | | | |
| 3 | 3 | 7-1/2 | ~ | ~ | 6.3...10 | 130 | 11 | CX7-12-10-*AS10A-A10-PG▼ | | | | Q4 | | | | |
| 5 | 5 | 10 | ~ | ~ | 10...16 | 208 | 12 | CX7-16-10-*AS16A-A10-PG▼ | | | | Q4 | | | | |
| 5 | 7-1/2 | 15 | ~ | ~ | 14.5...20 | 260 | 13 | CX7-23-10-*AS20A-A10-PG▼ | | | | Q4 | | | | |
| KTA7-25H High Interrupting Capacity | | | | | | | | | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | ~ | 1.6...2.5 | 33 | 17 | CX7-9-10-*AH2.5A-A10-PG▼ | | | | Q4 | | | | |
| 1 | 1 | 3 | 3 | ~ | 2.5...4 | 52 | 19 | CX7-9-10-*AH4A-A10-PG▼ | | | | Q4 | | | | |
| 1-1/2 | 2 | 5 | 5 | ~ | 4...6.3 | 82 | 21 | CX7-9-10-*AH6.3A-A10-PG▼ | | | | Q4 | | | | |
| 3 | 3 | 7-1/2 | 10 | ~ | 6.3...10 | 130 | 22 | CX7-12-10-*AH10A-A10-PG▼ | | | | Q4 | | | | |
| 5 | 5 | 10 | 15 | ~ | 10...16 | 208 | 28 | CX7-16-10-*AH16A-A10-PG▼ | | | | Q4 | | | | |
| 5 | 7-1/2 | 15 | ~ | ~ | 14.5...20 | 260 | 31 | CX7-23-10-*AH20A-A10-PG▼ | | | | Q4 | | | | |
| 5 | 7-1/2 | 15 | ~ | ~ | 18...25 | 325 | 33 | CX7-23-10-*AH25A-A10-PG▼ | | | | Q4 | | | | |

Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ③
- Power wiring
- Factory installed Pilot device option ⑥

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor

AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|--------------|-----------------|-----------------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 415 | 400-415V | ~ |
| 480 ⑨ | 440V | 480V |
| 600 ⑨ | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ④ Other voltages available, see Section A in this catalog.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑥ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

- ⑦ CPT not possible with KS7-COC4R. Refer to page F118 for wiring diagram and F119 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-*AS0.16A-A10-PG▼ to CX7-9-10-*AS0.16A-A10-PJ▼.
- ⑨ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Motor Circuit Controllers

Section Obsolete
See pages F1.56 - F1.88

Enclosed Non-Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ④⑥⑦

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | | | Dimension Code |
|-------------------------|-------|-------|------|---|--|---------|--|----|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ⑤ | Catalog Number ④⑥⑧ | | |
| Three Phase | | | | | | | | | |
| 200V | 230V | 460V | 575V | KTA7-25S Standard Interrupting Capacity | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CX7-9E-10- * -AS0.16A-A10-PG▼ | Q4 | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CX7-9E-10- * -AS0.25A-A10-PG▼ | Q4 | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CX7-9E-10- * -AS0.4A-A10-PG▼ | Q4 | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CX7-9E-10- * -AS0.63A-A10-PG▼ | Q4 | |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CX7-9E-10- * -AS1A-A10-PG▼ | Q4 | |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CX7-9E-10- * -AS1.6A-A10-PG▼ | Q4 | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CX7-9E-10- * -AS2.5A-A10-PG▼ | Q4 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CX7-9E-10- * -AS4A-A10-PG▼ | Q4 | |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CX7-9E-10- * -AS6.3A-A10-PG▼ | Q4 | |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CX7-9E-10- * -AS10A-A10-PG▼ | Q4 | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 28 | CX7-16E-10- * -AS16A-A10-PG▼ | Q4 | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CX7-23E-10- * -AS20A-A10-PG▼ | Q4 | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CX7-9E-10- * -AS2.5A-A10-PG▼ | Q4 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 18 | CX7-9E-10- * -AH4A-A10-PG▼ | Q4 | |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 12 | CX7-9E-10- * -AH6.3A-A10-PG▼ | Q4 | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 14 | CX7-12E-10- * -AH10A-A10-PG▼ | Q4 | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 28 | CX7-16E-10- * -AH16A-A10-PG▼ | Q4 | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CX7-23E-10- * -AH20A-A10-PG▼ | Q4 | |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CX7-23E-10- * -AH25A-A10-PG▼ | Q4 | |



Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactors (for remote operation), with Electronic DC Coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB) + KT7-KN1 ⑤
- Power wiring
- Factory installed Pilot device option ⑥

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

Section Obsolete
See pages F1.56 - F1.88

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ④ CX7-9E...23E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

- ⑥ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.
- ⑦ CPT not possible with KS7-COC4R. Refer to page F118 for wiring diagram and F119 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-~~*~~-AS0.16A-A10-PG▼ to CX7-9-10-~~*~~-AS0.16A-A10-PJ▼.

Enclosed Non-Reversing Combination Controller with E-Stop, AC Operation - Type 1/12K/IP66 ①⑦⑧

| Amp / Horsepower Rating | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R) | | | | Dimension Code |
|-------------------------|-------|-------|------|--|---------------------------|---------|------------------------------|----------------|
| Max. Horsepower ②③④ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ⑥ | Catalog Number ⑤⑦⑨⑩ | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | KTA7-25S Standard Interrupting Capacity | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CX7-9-10-*AS0.16A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CX7-9-10-*AS0.25A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CX7-9-10-*AS0.4A-A10-PG4U-9 | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CX7-9-10-*AS0.63A-A10-PG4U-9 | Q4 |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CX7-9-10-*AS1A-A10-PG4U-9 | Q4 |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CX7-9-10-*AS1.6A-A10-PG4U-9 | Q4 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CX7-9-10-*AS2.5A-A10-PG4U-9 | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CX7-9-10-*AS4A-A10-PG4U-9 | Q4 |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CX7-9-10-*AS6.3A-A10-PG4U-9 | Q4 |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CX7-9-10-*AS10A-A10-PG4U-9 | Q4 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 13 | CX7-9-10-*AS16A-A10-PG4U-9 | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 325 | 15 | CX7-23-10-*AS20A-A10-PG4U-9 | Q4 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CX7-9-10-*AH2.5A-A10-PG4U-9 | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 19 | CX7-9-10-*AH4A-A10-PG4U-9 | Q4 |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 22 | CX7-9-10-*AH6.3A-A10-PG4U-9 | Q4 |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 24 | CX7-12-10-*AH10A-A10-PG4U-9 | Q4 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 28 | CX7-16-10-*AH16A-A10-PG4U-9 | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 325 | 31 | CX7-23-10-*AH20A-A10-PG4U-9 | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CX7-23-10-*AH25A-A10-PG4U-9 | Q4 |



Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R) ①
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Multifunction 2-position Push Button and Emergency Stop ⑦
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ⑨
- Power wiring

This is a factory assembly. Optional factory modifications are not available on this device.

Contactor AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 415 | 400-415V | ~ |
| 480 ⑩ | 440V | 480V |
| 600 ⑩ | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① This is a factory assembly. The KS7-C0C4R does not include knock-outs for field assembly of this starter.
- ② Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ③ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ④ CX7 may be applied to single phase loads. Contact factory for these specifications.
- ⑤ Other voltages available, see Section A in this catalog.
- ⑥ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑦ Uses D7P-U2EFFEPX11 Two-Position Multifunction push button with legend I/O and D7P-MT44PX01 Emergency Stop Push Button.

- ⑧ CPT not possible with KS7-C0C4R. Refer page F119 for dimensional information.
- ⑨ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: CX7-9-10-*AS0.16A-A10-PG4U-9 becomes CX7-9-10-*AS0.16A-A10-PJ4U-9.
- ⑩ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Section Obsolete
See pages F1.56 - F1.88

Enclosed Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ⑥⑦

| Amp / Horsepower Rating | | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | | Dimension Code |
|-------------------------|-------|-------|------|---|--|---------|----------------------------|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ⑤ | Catalog Number ④⑥⑧⑨ | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | KTA7-25S Standard Interrupting Capacity | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CXU7-9-22-*AS0.16A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CXU7-9-22-*AS0.25A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CXU7-9-22-*AS0.4A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CXU7-9-22-*AS0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CXU7-9-22-*AS1A-A10-PG▼ | Q4 |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CXU7-9-22-*AS1.6A-A10-PG▼ | Q4 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CXU7-9-22-*AS2.5A-A10-PG▼ | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CXU7-9-22-*AS4A-A10-PG▼ | Q4 |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CXU7-9-22-*AS6.3A-A10-PG▼ | Q4 |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CXU7-9-22-*AS10A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 28 | CXU7-16-22-*AH16A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CXU7-23-22-*AH20A-A10-PG▼ | Q4 |
| | | | | KTA7-25S High Interrupting Capacity | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CXU7-9-22-*AS2.5A-A10-PG▼ | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 18 | CXU7-9-22-*AH4A-A10-PG▼ | Q4 |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 22 | CXU7-9-22-*AH6.3A-A10-PG▼ | Q4 |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 24 | CXU7-12-22-*AH10A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 28 | CXU7-16-22-*AH16A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CXU7-23-22-*AH20A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CXU7-23-22-*AH25A-A10-PG▼ | Q4 |

Includes:

- Type 1/12K Non-metallic enclosure (KS7-COC4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ⑧
- Power wiring
- Factory installed Pilot device option ⑥

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor

AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|--------------|---------------|-----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200V-220V | 208V-240V |
| 415 | 400-415V | ~ |
| 480 ⑨ | 440V | 480V |
| 600 ⑨ | 550V | 600V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CXU7 may be applied to single phase loads. Contact factory for specifications.
- ④ Other voltages available, see Section A in this catalog.
- ⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑥ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

- ⑦ CPT not possible with KS7-COC4R. Refer to page F118 for wiring diagram and F119 for dimensional information.
- ⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-*AS0.16A-A10-PG▼ to CXU7-9-10-*AS0.16A-A10-PJ▼.
- ⑨ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ④⑥⑦

| Amp / Horsepower Rating | | | | Non-Metallic Type 1/12K/IP66 Enclosure (KS7-COC4R) | | | | Dimension Code |
|--|-------|-------|------|--|---------------------------|---------|-----------------------------|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ⑤ | Catalog Number ④⑥⑧ | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CXU7-9E-22-*AS0.16A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CXU7-9E-22-*AS0.25A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CXU7-9E-22-*AS0.4A-A10-PG▼ | Q4 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CXU7-9E-22-*AS0.63A-A10-PG▼ | Q4 |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CXU7-9E-22-*AS1A-A10-PG▼ | Q4 |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CXU7-9E-22-*AS1.6A-A10-PG▼ | Q4 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CXU7-9E-22-*AS2.5A-A10-PG▼ | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CXU7-9E-22-*AS4A-A10-PG▼ | Q4 |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CXU7-9E-22-*AS6.3A-A10-PG▼ | Q4 |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CXU7-9E-22-*AS10A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 12 | CXU7-9E-22-*AS16A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 13 | CXU7-23E-22-*AS20A-A10-PG▼ | Q4 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CXU7-9E-22-*AH2.5A-A10-PG▼ | Q4 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 19 | CXU7-9E-22-*AH4A-A10-PG▼ | Q4 |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 21 | CXU7-9E-22-*AH6.3A-A10-PG▼ | Q4 |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 22 | CXU7-12E-22-*AH10A-A10-PG▼ | Q4 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 28 | CXU7-16E-22-*AH16A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CXU7-23E-22-*AH20A-A10-PG▼ | Q4 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CXU7-23E-22-*AH25A-A10-PG▼ | Q4 |



- Includes:**
- Type 1/12K Non-metallic enclosure (KS7-COC4R)
 - KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
 - Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
 - CA7 contactors (for remote operation), with Electronic DC coil
 - Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ⑧
 - Power wiring
 - Factory installed Pilot device option ⑥

Replace ▼ with option code. See page F103 for factory installed modifications

Control Electronic DC Coil Codes (*) ④

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

Enclosed Motor Circuit Controllers

Section Obsolete
See pages F1.56 - F1.88

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor. For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

③ CXU7 may be applied to single phase loads. Contact factory for these specifications.

④ CXU7-9E...23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

⑤ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

⑥ One Pilot Device option must be selected. Blanks are not available. Plastic Bezel is standard. Pilot Device options include D7-BX Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

⑦ CPT not possible with KS7-COC4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

⑧ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-*AS0.16A-A10-PG▼ to CXU7-9-10-*AS0.16A-A10-PJ▼.

CX7 Non-Reversing Controller Modifications

| Pilot Device Options - required | |
|--|----------------------------------|
| Select one option only ①②③ | Replace ▼ in catalog number with |
| START-STOP Multi-function | 3U |
| I-O Multi-function | 4U |
| OFF-ON 2-Position Selector switch | 6 |
| HAND-OFF-AUTO 3-Position Selector switch | 7 |
| Run Pilot Light Green | 1G |
| Run Pilot Light Red | 1R |
| Overload Alarm Pilot Light | 1Y |
| D7-N8 22mm Hole Plug | 0 |
| Additional KT7 Auxiliaries & Trip Contacts | |
| Front Mount 300V maximum | |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

CX7 Non-Reversing Controller Additions

| Addition | Add to end of catalog number |
|---|------------------------------|
| CA7 Contactor Accessories | |
| Electronic Interface ④ | -JE |
| Surge Suppressor RC | -R |
| Surge Suppressor Varistor | -V |
| CA7 Auxiliary Contacts ⑤⑥ | |
| 1 NO Auxiliary | -S10 |
| 1 NC Auxiliary | -S01 |
| 1 NO + 1 NC Auxiliary | -S1 |
| 2 NO Auxiliaries | -S20 |
| 2 NC Auxiliaries | -S02 |
| Alternate Aux. Contact Alternative (on CX7 only) | |
| 1 NC in lieu of standard 1 NC | -SX10 |
| 2 NC in lieu of standard 2 NO (on CXU7 only) | -SX2 |
| Unwired Terminal Blocks Specify quantity (▼) | -▼TB |

CXU7 Reversing Controller Modifications

| Pilot Device Options - required | |
|--|----------------------------------|
| Select one option only ①②③ | Replace ▼ in catalog number with |
| FOR-STOP-REV Multi-function | 3U |
| UP-STOP-DOWN Multi-function | 4U |
| OPEN-STOP-CLOSE Multi-function | 5U |
| FOR-STOP-REV 3-Position Selector switch | 6 |
| UP-OFF-DOWN 3-Position Selector switch | 7 |
| OPEN-OFF-CLOSE 3-Position Selector switch | 8 |
| Overload Alarm Pilot Light | 1Y |
| D7-N8 22mm Hole Plug | 0 |
| Additional KT7 Auxiliaries & Trip Contacts | |
| Front Mount 300V maximum | |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |

CXU7 Reversing Controller Additions

| Addition | Add to end of catalog number |
|---------------------------|------------------------------|
| CA7 Contactor Accessories | |
| Electronic Interface ④ | -JE |
| Surge Suppressor RC | -R |
| Surge Suppressor Varistor | -V |


Section Obsolete
See pages F1.56 - F1.88

- ① KS7-C0C4R only has (1) 22mm hole to accommodate (1) pilot device.
- ② Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").
- ③ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 380 VAC...575VAC require a control circuit




- transformer.
- ④ CRI7E-24 will be used. CRI7E-12 by special order only.
- ⑤ See page A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
- ⑥ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

F
Enclosed Motor Circuit Controllers





CX7 KWIKstarter Enclosures for use with KTA7 Type E Motor Controllers and CA7 Contactors ①③

| Component | Description | For Use With | | Environmental Approvals | Catalog Number |
|---|--|----------------------|--|----------------------------|------------------|
| | | Type E Controller | Contactors | | |
|  | Enclosure for Combo KWIKstarter ① CX7/CXU7-9...23 CX7/CXU7-9E...23E | KTA7-25S KTA7-25H | CA7-9...23 CA7-9E...23E CAU7-9...23 CAU7-9E...23E | cUL Type 1/12K IEC IP66 | KS7-C0C4R |

Handle Accessory for CX7/CXU7 KWIKstarters ①

| Accessory | Description | For Use With | Color | Catalog Number |
|---|--|--------------|------------|------------------------|
|  | Door Coupling Handle ① • Padlockable • NEMA Type 1/12K and IP66 • Includes handle coupling (shaft) • Requires KT7-KN1 Locking Knob | All KT7s | Gray/Black | KT7-SHB |
| | | | Red/Yellow | KT7-SHBY |
|  | Lockable Twist Knob • for use with KT7-SHB | All KT7s | Gray/Black | KT7-KN1 |
|  | Universal Connector for CX7/CXU7 • Provides electrical interconnection of KTA7 and CA7 (with AC or Electronic DC coil) • Applies to FVNR and FVR versions • Allows for mounting the CA7 on a single DIN rail | All KT7s | Black | KT7-25S-1-23A ② |

CX7 KWIKstarter Pilot Device Kits (for use with KS7-C0C4R Type 1/12K) ①②

| Kits | Description | Contact Blocks Included | | Catalog Number | | |
|---|---|-------------------------|----|--|------------------|---|
| | | NO | NC | | | |
|  | Multi-Function Pushbutton kit Non-illuminated START-STOP I-O | 1 | 1 | KS7-P3U KS7-P4U | See page C29 for | |
| | FOR-STOP-REV UP-STOP-DOWN OPEN-STOP-CLOSE | 2 | 1 | KS7-P3U-REV KS7-P4U-REV KS7-P5U-REV | | |
|  | Selector switch kits Non-illuminated, includes legend plate | | | | | |
| | ON-OFF 2-Position | 1 | 0 | KS7-P6 | | |
| | HAND-OFF-AUTO 3-Position | 2 | 0 | KS7-P7 | | |
|  | Run Pilot Light or Overload Alarm Pilot Light Plastic operator with diffuser lens in Red, Green or Yellow, with integrated LED power module | | | Replace ⑤ with color choice R = Red G = Green Y = Yellow | | KS7-P1⑥24V ⑥ KS7-P1⑥120V KS7-P1⑥240V |
| | FOR-OFF-REV 3-Position UP-OFF-DOWN 3-Position OPEN-OFF-CLOSE 3-Position | 2 | 0 | | | |
|  | Hole Plug used to plug 22.5mm holes. | | | Gray Plastic | | D7-N8 |

① KS7-C0C4R is supplied with the following holes:
 • (1) one 22mm hole for a Pilot Device option, select one kit from this page.
 • (1) one 22mm hole for KT7-SHB (or SHRY) Disconnect or Reset handle.

② Plastic bezel is standard. Pilot Device Kits include D7-BX_ Base Mounted contact blocks. See Section H for more information.

③ CPT not possible.

④ Standard KT7-25S-PEC23 does not work in CX7/CXU7 Kwikstarters.

⑤ KS7-P1⑥24V can be used with 24VAC or 24VDC.


F Enclosed Motor Circuit Controllers

Section Obsolete
See pages F1.56 - F1.88

Enclosed Non-Reversing Combination Controller, AC Operation - Type 4 / 12

| Amp / Horsepower Rating | | | | Painted Steel, Type 4 / 12 Enclosure | | | | Dimension Code |
|--|-------|-------|------|--------------------------------------|---------------------------|---------|---------------------------|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ④ | Catalog Number ⑤⑦ | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CX7-9-10-*-AS0.16A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CX7-9-10-*-AS0.25A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CX7-9-10-*-AS0.4A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CX7-9-10-*-AS0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CX7-9-10-*-AS1A-A10-WG | W6 |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CX7-9-10-*-AS1.6A-A10-WG | W6 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CX7-9-10-*-AS2.5A-A10-WG | W6 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CX7-9-10-*-AS4A-A10-WG | W6 |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CX7-9-10-*-AS6.3A-A10-WG | W6 |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 10 | CX7-12-10-*-AS10A-A10-WG | W6 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 11 | CX7-16-10-*-AS16A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 16...20 | 260 | 15 | CX7-23-10-*-AS20A-A10-WG | W6 |
| KTA7-25H High Interrupting Capacity | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CX7-9-10-*-AH2.5A-A10-WG | W6 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 18 | CX7-9-10-*-AH4A-A10-WG | W6 |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 22 | CX7-9-10-*-AH6.3A-A10-WG | W6 |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 24 | CX7-12-10-*-AH10A-A10-WG | W6 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 28 | CX7-16-10-*-AH16A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CX7-23-10-*-AH20A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CX7-23-10-*-AH25A-A10-WG | W6 |
| KTA7-45H High Interrupting Capacity | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 36 | CX7-30-10-*-AH10A-A10-WG | W7 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 37 | CX7-30-10-*-AH16A-A10-WG | W7 |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | 38 | CX7-30-10-*-AH20A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | 39 | CX7-30-10-*-AH25A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | 41 | CX7-30-10-*-AH32A-A10-WG | W7 |
| 10 | 10 | 25 | ~ | 32...45 | 585 | 45 | CX7-37-10-*-AH45A-A10-WG | W7 |
| 10 | 15 | 30 | ~ | 32...45 | 585 | 46 | CX7-43-10-*-AH45A-A10-WG | W7 |

Painted Steel, Type 4 / 12 Enclosure



Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Section Obsolete
See pages F1.56 - F1.88

Contactor AC Coil Codes (*) ⑤


| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 ⑦ | 400-415V | ~ |
| 480 ⑦ | 440V | 480V |
| 600 ⑦ | 550V | 600V |

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change CX7-9-10-*-0.16A-A10-WG to CBX7-9-10-*-0.16A-A10-WJ.

- ④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9-10-*-0.16A-A10-WG to CX7-9-10-*-0.16A-A10-WJ.
- ⑤ Other voltages available, see Section A in this catalog.
- ⑥ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
- ⑦ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | | | |
|--|-------|-------|------|-------------|--------------------------------------|-----------------------------|-----------------------------|------------------|----------------|
| Max. Horsepower ①②③ | | | | | O/L Relay Ampere Range | Mag-netic Re-sponse Current | Index ⑦ | Catalog Number ④ | Dimension Code |
| Three Phase | | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CX7-9E-10-**-AS0.16A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CX7-9E-10-**-AS0.25A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CX7-9E-10-**-AS0.4A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CX7-9E-10-**-AS0.63A-A10-WG | W6 | |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CX7-9E-10-**-AS1A-A10-WG | W6 | |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CX7-9E-10-**-AS1.6A-A10-WG | W6 | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CX7-9E-10-**-AS2.5A-A10-WG | W6 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CX7-9E-10-**-AS4A-A10-WG | W6 | |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CX7-9E-10-**-AS6.3A-A10-WG | W6 | |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CX7-12E-10-**-AS10A-A10-WG | W6 | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 12 | CX7-16E-10-**-AS16A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 15 | CX7-23E-10-**-AS20A-A10-WG | W6 | |
| KTA7-25H High Interrupting Capacity | | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CX7-9E-10-**-AH2.5A-A10-WG | W6 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 19 | CX7-9E-10-**-AH4A-A10-WG | W6 | |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 22 | CX7-9E-10-**-AH6.3A-A10-WG | W6 | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 24 | CX7-12E-10-**-AH10A-A10-WG | W6 | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 28 | CX7-16E-10-**-AH16A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 33 | CX7-23E-10-**-AH20A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 35 | CX7-30E-10-**-AH25A-A10-WG | W6 | |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 36 | CX7-30E-10-**-AH10A-A10-WG | W7 | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 37 | CX7-30E-10-**-AH16A-A10-WG | W7 | |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | 38 | CX7-30E-10-**-AH20A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | 39 | CX7-30E-10-**-AH25A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | 41 | CX7-37E-10-**-AH32A-A10-WG | W7 | |
| 10 | 10 | 25 | ~ | 32...45 | 585 | 45 | CX7-37E-10-**-AH45A-A10-WG | W7 | |
| 10 | 15 | 30 | ~ | 32...45 | 585 | 46 | CX7-43E-10-**-AH45A-A10-WG | W7 | |



Includes:

- Type 4 / 12 enclosure - watertight, dusttight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Contactors Electronic DC Coil Codes (*) ⑤

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

Section Obsolete
See pages F1.56 - F1.88

① Horsepower ratings shown in the table above are for reference. *The final selection of the controller depends on the actual motor full load current and service factor.*

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

③ CX7 may be applied to single phase loads. Contact factory for these specifications.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9E-10-**-0.16A-A10-WG to CX7-9E-10-**-0.16A-A10-WJ.

⑤ CX7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.


⑦ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Ordering Instructions

| | |
|----------------------------------|---|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See Coil Code tables on this page for codes |
| Select modifications if required | |

Enclosed Reversing Combination Controller, AC Operation - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | | | |
|--|-------|-------|------|------------------------|--------------------------------------|---------|----------------------------|----------------|--|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ④ | Catalog Number ⑤⑦ | Dimension Code | |
| Three Phase | | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CXU7-9-22-*-AS0.16A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CXU7-9-22-*-AS0.25A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CXU7-9-22-*-AS0.4A-A10-WG | W6 | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CXU7-9-22-*-AS0.63A-A10-WG | W6 | |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CXU7-9-22-*-AS1A-A10-WG | W6 | |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CXU7-9-22-*-AS1.6A-A10-WG | W6 | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CXU7-9-22-*-AS2.5A-A10-WG | W6 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CXU7-9-22-*-AS4A-A10-WG | W6 | |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CXU7-9-22-*-AS6.3A-A10-WG | W6 | |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 10 | CXU7-12-22-*-AS10A-A10-WG | W6 | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 11 | CXU7-16-22-*-AS16A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 16...25 | 260 | 15 | CXU7-23-22-*-AS20A-A10-WG | W6 | |
| KTA7-25H High Interrupting Capacity | | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CXU7-9-22-*-AH2.5A-A10-WG | W6 | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 18 | CXU7-9-22-*-AH4A-A10-WG | W6 | |
| 1/1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 19 | CXU7-9-22-*-AH6.3A-A10-WG | W6 | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 24 | CXU7-12-22-*-AH10A-A10-WG | W6 | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 28 | CXU7-16-22-*-AH16A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 16...25 | 260 | 31 | CXU7-23-22-*-AH20A-A10-WG | W6 | |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CXU7-23-22-*-AH25A-A10-WG | W6 | |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 36 | CXU7-30-22-*-AH10A-A10-WG | W7 | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 37 | CXU7-30-22-*-AH16A-A10-WG | W7 | |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | 38 | CXU7-30-22-*-AH20A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | 39 | CXU7-30-22-*-AH25A-A10-WG | W7 | |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | 41 | CXU7-37-22-*-AH32A-A10-WG | W7 | |
| 10 | 10 | 25 | ~ | 32...45 | 585 | 45 | CXU7-37-22-*-AH45A-A10-WG | W7 | |
| 10 | 15 | 30 | ~ | 32...45 | 585 | 46 | CXU7-43-22-*-AH45A-A10-WG | W7 | |



Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactors (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Section Obsolete
See pages F1.56 - F1.88

Contactor AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 ⑦ | 400-415V | ~ |
| 480 ⑦ | 440V | 480V |
| 600 ⑦ | 550V | 600V |

① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

③ CXU7 may be applied to single phase loads. Contact factory for these applications.

④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9-10-*-0.16A-A10-WG

to CXU7-9-10-*-0.16A-A10-WJ.

⑤ Other voltages available, see Section A in this catalog.

⑥ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

⑦ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

| Amp / Horsepower Rating | | | | | Painted Steel, Type 4 / 12 Enclosure | | | Dimension Code |
|--|-------|-------|------|------------------------|--------------------------------------|---------|----------------------------|----------------|
| Max. Horsepower ①②③ | | | | O/L Relay Ampere Range | Magnetic Response Current | Index ④ | Catalog Number ④ | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | 1 | CXU7-9E-22-*AS0.16A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | 2 | CXU7-9E-22-*AS0.25A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | 3 | CXU7-9E-22-*AS0.4A-A10-WG | W6 |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | 4 | CXU7-9E-22-*AS0.63A-A10-WG | W6 |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | 5 | CXU7-9E-22-*AS1A-A10-WG | W6 |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | 6 | CXU7-9E-22-*AS1.6A-A10-WG | W6 |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 7 | CXU7-9E-22-*AS2.5A-A10-WG | W6 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 8 | CXU7-9E-22-*AS4A-A10-WG | W6 |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | 9 | CXU7-9E-22-*AS6.3A-A10-WG | W6 |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | 11 | CXU7-12E-22-*AS10A-A10-WG | W6 |
| 5 | 5 | 10 | ~ | 10...16 | 208 | 13 | CXU7-16E-22-*AS16A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 15 | CXU7-23E-22-*AS20A-A10-WG | W6 |
| KTA7-25H High Interrupting Capacity | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | 17 | CXU7-9E-22-*AH2.5A-A10-WG | W6 |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | 19 | CXU7-9E-22-*AH4A-A10-WG | W6 |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | 22 | CXU7-9E-22-*AH6.3A-A10-WG | W6 |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 25 | CXU7-12E-22-*AH10A-A10-WG | W6 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 28 | CXU7-16E-22-*AH16A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | 31 | CXU7-23E-22-*AH20A-A10-WG | W6 |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | 33 | CXU7-23E-22-*AH25A-A10-WG | W6 |
| KTA7-45H High Interrupting Capacity | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | 36 | CXU7-30E-22-*AH10A-A10-WG | W7 |
| 5 | 5 | 10 | 15 | 10...16 | 208 | 37 | CXU7-30E-22-*AH16A-A10-WG | W7 |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | 38 | CXU7-30E-22-*AH20A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | 39 | CXU7-30E-22-*AH25A-A10-WG | W7 |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | 41 | CXU7-37E-22-*AH32A-A10-WG | W7 |
| 10 | 10 | 25 | ~ | 32...45 | 585 | 45 | CXU7-37E-22-*AH45A-A10-WG | W7 |
| 10 | 15 | 30 | ~ | 32...45 | 585 | 46 | CXU7-43E-22-*AH45A-A10-WG | W7 |



Includes:

- Type 4 / 12 enclosure - watertight, dusttight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactors (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ④
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Section Obsolete
See pages F1.56 - F1.88

Contactors Electronic DC Coil Codes (*) ⑤

| DC Coil Codes | Voltage |
|---------------|----------|
| 12E | 12V |
| 24E | 24V |
| 36E | 36-48V |
| 48E | 48-72V |
| 110E | 110-125V |
| 220E | 220-250V |

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CXU7 may be applied to single phase loads. Contact factory for these applications.
- ④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9E-10-*0.16A-A10-WG to CXU7-9E-10-*0.16A-A10-WJ.
- ⑤ CXU7-9E...43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑥ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Ordering Instructions

| | |
|----------------------------------|---|
| Specify Catalog Number | |
| Replace (□) with Coil Code | See Coil Code tables on this page for codes |
| Select modifications if required | |

Enclosed Motor Circuit Controllers

Non-Reversing and Reversing CX7 Combination Controller Modifications (Factory Assembled)

| Description | Add Suffix to Catalog Number |
|---|---|
| Pilot Devices ① | |
| START-STOP multi-function pushbutton | 3U |
| ON-OFF multi-function pushbutton | 4U |
| FOR-STOP-REV multi-function pushbutton | 3U |
| UP-STOP-DOWN multi-function pushbutton | 4U |
| OPEN-STOP-CLOSE multi-function pushbutton | 5U |
| HAND-AUTO selector switch | 5 |
| OFF-ON selector switch | 6 |
| HAND-OFF-AUTO selector switch | 7 |
| FOR-OFF-REV selector switch | 6 |
| UP-OFF-DOWN selector switch | 7 |
| OPEN-OFF-CLOSE selector switch | 8 |
| Pilot light only ③ | 1 |
| Pilot lights only (2) ③ | 2 |
| Pilot light w/ START-STOP multi-function pushbutton ③ | 13U |
| Pilot light w/ ON-OFF multi-function pushbutton ③ | 14U |
| Pilot light w/ HAND-AUTO selector switch ③ | 15 |
| Pilot light w/ OFF-ON selector switch ③ | 16 |
| Pilot light w/ HAND-OFF-AUTO selector switch ③ | 17 |
| Control Power Transformer | |
| (with fused primary and secondary) | Replace (*) with the catalog # with the blue wire codes ② |
| Primary volts | Secondary volts |
| 208 | 120 |
| 240 | 24 |
| 480 | 120 |
| 575 | 120 |
| 380 | 110 |
| 240 | 24 |
| 480 | 24 |
| 600 | 24 |
| 50 watt Standard Capacity | XA |
| | XB |
| | XC |
| | XD |
| | XE |
| | XF |
| | XJ |
| KT7 Auxiliaries & Trip Contacts ⑤ | |
| | Change "-A10-" to ... |
| Front mount 300V maximum | |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NO Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |
| Side Mount 600V maximum | |
| 2 NC Auxiliaries | -AS02 |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| 1 NC SC+OL + 1 NO Auxiliary | -R10 |
| 1 NC SC+OL + 1 NC Auxiliary | -R11 |

| Description | Add Suffix to Catalog Number |
|---|---|
| Additional KT7 Trip Contacts - Side Mount (600V max) | |
| 1 NO SC+OL + 1 NO SC | -R00 |
| 1 NO SC+OL + 1 NC SC | -R01 |
| 1 NC SC+OL + 1 NO SC | -R10 |
| KT7 Accessories | |
| Undervoltage Release Module | Select coil voltage from table below -UA-* |
| Shunt Release Module | -AA-* |
| CA7 Auxiliary Contacts ⑥ | |
| 1 NO Auxiliary | -S10 |
| 1 NC Auxiliary | -S01 |
| 1 NO + 1 NC Auxiliary | -S11 |
| 2 NO Auxiliaries | -S20 |
| 2 NC Auxiliaries | -S02 |
| 1 NO + 2 NC Auxiliary | -S12 |
| 2 NO + 1 NC Auxiliary | -S21 |
| 3 NO Auxiliaries | -S30 |
| 3 NC Auxiliaries | -S03 |
| 1 NO + 3 NC Auxiliary | -S13 |
| 3 NO + 1 NC Auxiliary | -S31 |
| 2 NO + 1 NC Auxiliary | -S22 |
| 4 NO Auxiliaries | -S40 |
| 4 NC Auxiliaries | -S04 |
| Alternate Aux. Contact Arrangements (7-10) | |
| 1 NC in lieu of standard 1 NO | -SX10 |
| 2 NC in lieu of standard 2 NO (on CXU7 only) | -SX2 |
| CA7 Contactor Accessories | |
| Encoder Interface | -JE ④ |
| Surge Suppressor RC | -R |
| Surge Suppressor Varistor | -V |
| Unwired Terminal Blocks Specify quantity (▼) | -▼TB |

Section Obsolete
See pages F1.56 - F1.88

-UA..-AA Coil Codes (*)

| AC Coil Code | Voltage Range | |
|--------------|---------------|------------|
| | 50 Hz | 60 Hz |
| 24V | 21V | 24V |
| 28V | 24V | 28V |
| 120V | 105V | 120V |
| 127V | 110V | 127V |
| 230V | 220...230V | ~ |
| 240V | ~ | 240...260V |
| 277V | 240V | 277V |
| 460V | 380...400V | 400...460V |
| 480V | 415V | 480V |
| 600V | 550V | 600V |

① Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").
 ② Factory modifications often change the enclosure size. Refer to factory for dimensions when critical to the installation.

③ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 277 VAC...575VAC require a control circuit transformer.
 ④ CRI7E-24 will be used. CRI7E-12 by special order only.
 ⑤ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 Explosion Proof Combination Controllers - NEMA Type 4/4X/7/9 with Type 4 Gaskets

| Amp / Horsepower Rating | | | | | O/L Relay Ampere Range | Magnetic Response Current | Catalog Number ⑤ | Dimension Code |
|--|-------|-------|------|-------------|------------------------|---------------------------------|------------------|----------------|
| Max. Horsepower ①②③ | | | | | | | | |
| Three Phase | | | | | | | | |
| 200V | 230V | 460V | 575V | | | | | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | CX7-9-10*-AS0.16A-A10-EZ | EZ | |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | CX7-9-10*-AS0.25A-A10-EZ | EZ | |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | CX7-9-10*-AS0.4A-A10-EZ | EZ | |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | CX7-9-10*-AS0.63A-A10-EZ | EZ | |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | CX7-9-10*-AS1A-A10-EZ | EZ | |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | CX7-9-10*-AS1.6A-A10-EZ | EZ | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CX7-9-10*-AS2.5A-A10-EZ | EZ | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CX7-9-10*-AS4A-A10-EZ | EZ | |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | CX7-9-10*-AS6.3A-A10-EZ | EZ | |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | CX7-12-10*-AS10A-A10-EZ | EZ | |
| 5 | 5 | 10 | ~ | 10...16 | 208 | CX7-16-10*-AS16A-A10-EZ | EZ | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CX7-23-10*-AS20A-A10-EZ | EZ | |
| KTA7-25H High Interrupting Capacity | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CX7-9-10*-AH2.5A-A10-EZ | EZ | |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CX7-9-10*-AH4A-A10-EZ | EZ | |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | CX7-9-10*-AH6.3A-A10-EZ | EZ | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CX7-12-10*-AH10A-A10-EZ | EZ | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CX7-16-10*-AH16A-A10-EZ | EZ | |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CX7-23-10*-AH20A-A10-EZ | EZ | |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CX7-30-10*-AH25A-A10-EZ | EZ | |
| KTA7-40 High Interrupting Capacity | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CX7-30-10*-AH10A-A10-EZ | EZ | |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CX7-30-10*-AH16A-A10-EZ | EZ | |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CX7-30-10*-AH20A-A10-EZ | EZ | |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CX7-30-10*-AH25A-A10-EZ | EZ | |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CX7-30-10*-AH32A-A10-EZ | EZ | |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CX7-37-10*-AH45A-A10-EZ | EZ | |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CX7-43-10*-AH45A-A10-EZ | EZ | |



Includes:

- Class I, Div I, Group B, C & D – Class II, Div I, Group E, F & G enclosure Class III, Zone I, IIB & H2
- KT7 “Type E” Self-protected Combination Manual Motor Controller with 1 NO front mount auxiliary contact (Cat.# KT7-PE1-10)
- Terminal Adaptor for Combo Type E/F Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring

Modifications (Factory Assembled)

| KT7 Auxiliaries & Trip Contacts, | Change “A10” in Cat. # to... |
|----------------------------------|----------------------------------|
| Front Mount 300V max. | |
| 1 NC Auxiliary | -A01 |
| 1 NO + 1 NC Auxiliary | -A11 |
| 2 NC Auxiliaries | -A20 |
| 1 NO SC+OL + 1 NC Auxiliary | -T10A01 |
| 1 NO SC+OL + 1 NO Auxiliary | -T10A10 |
| Side Mount 600V max. | |
| 2 NO Auxiliaries | -AS20 |
| 1 NO + 1 NC Auxiliary | -AS11 |
| 1 NC SC+OL + 1 NO Auxiliary | -R10 |
| 1 NC SC+OL + 1 NC Auxiliary | -R11 |
| CA7 Contactor Accessories | Add Suffix to Cat. Number |
| 1 NC Auxiliary | -S01 |
| 1 NO Auxiliary | -S10 |
| Electronic Interface | -JE |
| Surge Suppressor RC | -R |
| Surge Suppressor Varistor | -V |
| Enclosure Modifications | |
| Dual START/STOP pushbutton | 3 |
| ON/OFF selector switch | 6 |
| H-O-A | 7 |
| Breather/Drain | -BD |

Contactor AC Coil Codes (*) ④

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 ⑤ | 400-415V | ~ |
| 480 ⑤ | 440V | 480V |
| 600 ⑤ | 550V | 600V |

- ① Horsepower ratings shown in the table above are for reference. *The final selection of the controller depends on the actual motor full load current and service factor.*
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change “CX7” in catalog number to “CBX7”. Three pole series connection will be provided. Ex: Change **CX7-9-10*-0.16A-A10-EZ** to **CBX7-9-10*-0.16A-A10-EZ**.
- ④ Other voltages available, see Section A in this catalog.
- ⑤ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Ordering Instructions

| | |
|-----------------------------------|--|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See tables on this page for codes |
| Select modifications if required | |

Section Obsolete - F1.88
see pages F1.56 - F1.88

Type E/F Simplex & Duplex Pump Controllers



Simplex Pump Controllers

A single KTA7 motor controller plus matching CA7 contactor can be combined in an enclosure as a Simplex Combination Controller for pumping applications. Additional space is provided for the customer to field addition of time clocks or float switches as required by the application. An environmentally approved thru-the-door handle provides for a required disconnect. These pump panels can be supplied with Suitable for Service Entrance (SUSE) label on demand. Type E/F pump panels are less expensive than the classic Combination Type A (Fusible) or Combination Type C (MCCB) versions shown in Section C of this catalog.

Type E/F Simplex Pump Controller Panels include:


- Contactor (with AC coil)
- Type E/F self-protected motor controller
- "START" Momentary Push Button
- "HOA" Selector Switch
- A minimum of 6" x 10" extra back pan space
- UL Type rated enclosure

Duplex Pump Controllers

Two starter duplex panels can be fed from one power source or two power sources and include lead/lag control circuitry to meet customers' need in pumping and many other applications. Two environmentally approved thru-the-door handle disconnect mechanisms means no main fender device is required and small footprint less expensive panel than a classic duplex panel as offered in Section C of this catalog. The following pages include a selection of duplex controllers and you can contact your Sprecher + Schuh representative to modify the selection.

Type E/F Duplex Pump Controller Panels include:

- (2) Contactors (AC coil) and (2) Type E/F self protected motor controllers
- (1) Electronic alternating relay
- (1) UL type rated enclosure
- Designed per alternation control diagram shown at bottom of page F117

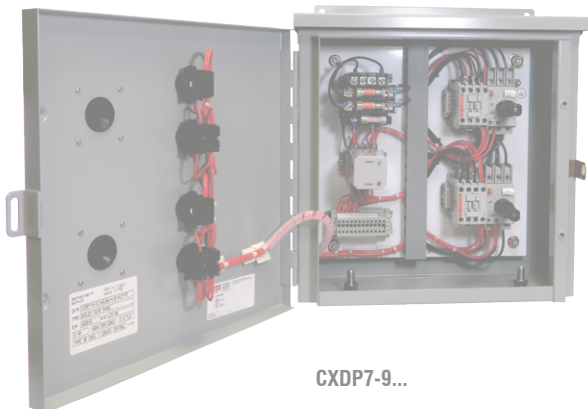

Section Obsolete
See pages F1.56 - F1.88

F
Enclosed Motor Circuit Controllers

Series CXP7 & Type E/F Combo Pump Panel

| Max. Horsepower ①②③ Three Phase | | | | Current Adjustment Range (A) | Magnetic Response Current | Type 3R Rainproof (Metal) | Dimension Code | Type 4X Watertight Corrosion Resistant Non-metallic | Dimension Code |
|--|-------|-------|------|------------------------------|---------------------------|------------------------------|----------------|---|----------------|
| 200V | 230V | 460V | 575V | | | Catalog Number ④⑥ | | Catalog Number ④⑥ | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | CXP7-9-10-*-AS0.16A-A10-RG | 0 | CXP7-9-10-*-AS0.16A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | CXP7-9-10-*-AS0.25A-A10-RG | 0 | CXP7-9-10-*-AS0.25A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | CXP7-9-10-*-AS0.4A-A10-RG | 0 | CXP7-9-10-*-AS0.4A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | CXP7-9-10-*-AS0.63A-A10-RG | 0 | CXP7-9-10-*-AS0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | CXP7-9-10-*-AS1A-A10-RG | 0 | CXP7-9-10-*-AS1A-A10-CG | R/F |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | CXP7-9-10-*-AS1.6A-A10-RG | 0 | CXP7-9-10-*-AS1.6A-A10-CG | R/F |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CXP7-9-10-*-AS2.5A-A10-RG | 0 | CXP7-9-10-*-AS2.5A-A10-CG | R/F |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CXP7-9-10-*-AS4A-A10-RG | 0 | CXP7-9-10-*-AS4A-A10-CG | R/F |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | CXP7-9-10-*-AS6.3A-A10-RG | 0 | CXP7-9-10-*-AS6.3A-A10-CG | R/F |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | CXP7-12-10-*-AS10A-A10-RG | 0 | CXP7-12-10-*-AS10A-A10-CG | R/F |
| 5 | 5 | 10 | ~ | 10...16 | 208 | CXP7-16-10-*-AS16A-A10-RG | 0 | CXP7-16-10-*-AS16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CXP7-23-10-*-AS20A-A10-RG | 0 | CXP7-23-10-*-AS20A-A10-CG | R/F |
| KTA7-25H High Interrupting Capacity | | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CXP7-9-10-*-AH2.5A-A10-RG | 0 | CXP7-9-10-*-AH2.5A-A10-CG | R/F |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CXP7-9-10-*-AH4A-A10-RG | 0 | CXP7-9-10-*-AH4A-A10-CG | R/F |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | CXP7-9-10-*-AH6.3A-A10-RG | 0 | CXP7-9-10-*-AH6.3A-A10-CG | R/F |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXP7-12-10-*-AH10A-A10-RG | 0 | CXP7-12-10-*-AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXP7-16-10-*-AH16A-A10-RG | 0 | CXP7-16-10-*-AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CXP7-23-10-*-AH20A-A10-RG | 0 | CXP7-23-10-*-AH20A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXP7-23-10-*-AH25A-A10-RG | 0 | CXP7-23-10-*-AH25A-A10-CG | R/F |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXP7-30-10-*-AH10A-A10-RG | Q | CXP7-30-10-*-AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXP7-30-10-*-AH16A-A10-RG | Q | CXP7-30-10-*-AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | 20 | 14.5...20 | 260 | CXP7-30-10-*-AH20A-A10-RG | Q | CXP7-30-10-*-AH20A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXP7-30-10-*-AH25A-A10-RG | Q | CXP7-30-10-*-AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 416 | CXP7-30-10-*-AH32A-A10-RG | Q | CXP7-30-10-*-AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXP7-37-10-*-AH45A-A10-RG | Q | CXP7-37-10-*-AH45A-A10-CG | R/F |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXP7-43-10-*-AH45A-A10-RG | Q | CXP7-43-10-*-AH45A-A10-CG | R/F |

NOTE: Catalog Numbers, list Price and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Section Obsolete
See pages F1.56 - F1.88

F Enclosed Motor Circuit Controllers

Contactors
AC Coil Codes (*) ⑤

| AC Coil Code | Voltage Range | |
|--------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 ⑥ | 400-415V | ~ |
| 480 ⑥ | 440V | 480V |
| 600 ⑥ | 550V | 600V |

- ① Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.
 - For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.
- ② Magnetic trip is fixed at 13x the maximum value of the current adjustment range.
- ③ CXP7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CXP7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change CXP7-9-10-*-0.16A-A10-RG to CBXP7-9-10-*-0.16A-A10-RG.
- ④ A red and yellow handle may be selected instead of the standard gray and black handle. Change "RG" suffix to "RJ". Ex: Change CXP7-9-10-*-0.16A-A10-RG to CXP7-9-10-*-0.16A-A10-RJ.
- ⑤ Other voltages available, see Section A in this catalog.
- ⑥ Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Ordering Instructions

| | |
|---------------------------------|-----------------|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See this page |
| Factory Modifications available | Contact factory |

Series CXDP7 with Type E/F Combination Controller

| Max. Horsepower Three Phase | | | | Current Adjustment Range (A) | Magnetic Response Current | Type 3R Rainproof (Metal) | Dimension Code | Type 4X Watertight Corrosion Resistant Non-metallic | Dimension Code |
|--|-------|-------|------|------------------------------------|---------------------------------|------------------------------|-------------------|---|-------------------|
| 200V | 230V | 460V | 575V | | | Catalog Number ② | | Catalog Number ② | |
| KTA7-25S Standard Interrupting Capacity | | | | | | | | | |
| ~ | ~ | ~ | ~ | 0.10...0.16 | 2.1 | CXDP7-9-10-*AS0.16A-A10-RG | R/F | CXDP7-9-10-*AS0.16A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.16...0.25 | 3.3 | CXDP7-9-10-*AS0.25A-A10-RG | R/F | CXDP7-9-10-*AS0.25A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.25...0.40 | 5.2 | CXDP7-9-10-*AS0.4A-A10-RG | R/F | CXDP7-9-10-*AS0.4A-A10-CG | R/F |
| ~ | ~ | ~ | ~ | 0.40...0.63 | 8.2 | CXDP7-9-10-*AS0.63A-A10-RG | R/F | CXDP7-9-10-*AS0.63A-A10-CG | R/F |
| ~ | ~ | 1/2 | 3/4 | 0.63...1.0 | 13 | CXDP7-9-10-*AS1A-A10-RG | R/F | CXDP7-9-10-*AS1A-A10-CG | R/F |
| ~ | ~ | 1 | 1 | 1.0...1.6 | 21 | CXDP7-9-10-*AS1.6A-A10-RG | R/F | CXDP7-9-10-*AS1.6A-A10-CG | R/F |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CXDP7-9-10-*AS2.5A-A10-RG | R/F | CXDP7-9-10-*AS2.5A-A10-CG | R/F |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CXDP7-9-10-*AS4A-A10-RG | R/F | CXDP7-9-10-*AS4A-A10-CG | R/F |
| 1-1/2 | 2 | 5 | ~ | 4...6.3 | 82 | CXDP7-9-10-*AS6.3A-A10-RG | R/F | CXDP7-9-10-*AS6.3A-A10-CG | R/F |
| 3 | 3 | 7-1/2 | ~ | 6.3...10 | 130 | CXDP7-12-10-*AS10A-A10-RG | R/F | CXDP7-12-10-*AS10A-A10-CG | R/F |
| 5 | 5 | 10 | ~ | 10...16 | 208 | CXDP7-16-10-*AS16A-A10-RG | R/F | CXDP7-16-10-*AS16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CXDP7-23-10-*AS20A-A10-RG | R/F | CXDP7-23-10-*AS20A-A10-CG | R/F |
| KTA7-25H High Interrupting Capacity | | | | | | | | | |
| 1/2 | 3/4 | 1-1/2 | 2 | 1.6...2.5 | 33 | CXDP7-9-10-*AH2.5A-A10-RG | R/F | CXDP7-9-10-*AH2.5A-A10-CG | R/F |
| 1 | 1 | 3 | 3 | 2.5...4 | 52 | CXDP7-9-10-*AH4A-A10-RG | R/F | CXDP7-9-10-*AH4A-A10-CG | R/F |
| 1-1/2 | 2 | 5 | 5 | 4...6.3 | 82 | CXDP7-9-10-*AH6.3A-A10-RG | R/F | CXDP7-9-10-*AH6.3A-A10-CG | R/F |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXDP7-12-10-*AH10A-A10-RG | R/F | CXDP7-12-10-*AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXDP7-16-10-*AH16A-A10-RG | R/F | CXDP7-16-10-*AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 14.5...20 | 260 | CXDP7-23-10-*AH20A-A10-RG | R/F | CXDP7-23-10-*AH20A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | ~ | 18...25 | 325 | CXDP7-30-10-*AH25A-A10-RG | R/F | CXDP7-30-10-*AH25A-A10-CG | R/F |
| KTA7-45H High Interrupting Capacity | | | | | | | | | |
| 3 | 3 | 7-1/2 | 10 | 6.3...10 | 130 | CXDP7-30-10-*AH10A-A10-RG | R/F | CXDP7-30-10-*AH10A-A10-CG | R/F |
| 5 | 5 | 10 | 15 | 10...16 | 208 | CXDP7-30-10-*AH16A-A10-RG | R/F | CXDP7-30-10-*AH16A-A10-CG | R/F |
| 5 | 7-1/2 | 15 | 20 | 14...20 | 260 | CXDP7-30-10-*AH20A-A10-RG | R/F | CXDP7-30-10-*AH20A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 20 | 18...25 | 325 | CXDP7-30-10-*AH25A-A10-RG | R/F | CXDP7-30-10-*AH25A-A10-CG | R/F |
| 7-1/2 | 10 | 20 | 25 | 23...32 | 410 | CXDP7-30-10-*AH32A-A10-RG | R/F | CXDP7-30-10-*AH32A-A10-CG | R/F |
| 10 | 10 | 25 | ~ | 32...45 | 585 | CXDP7-37-10-*AH45A-A10-RG | R/F | CXDP7-37-10-*AH45A-A10-CG | R/F |
| 10 | 15 | 30 | ~ | 32...45 | 585 | CXDP7-43-10-*AH45A-A10-RG | R/F | CXDP7-43-10-*AH45A-A10-CG | R/F |

NOTE: Catalog Numbers, list prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

**Contactors
AC Coil Codes (*) ①**

| AC Coil Code | Voltage Range | |
|-----------------|---------------|----------|
| | 50 Hz | 60 Hz |
| 24Z | 24V | 24V |
| 120 | 110V | 120V |
| 220W | 200-220V | 208-240V |
| 277 | 240V | 277V |
| 415 ② | 400-415V | ~ |
| 480 ② | 440V | 480V |
| 600 ② | 550V | 600V |

Ordering Instructions



| | |
|---------------------------------|----------------------------------|
| Specify Catalog Number | |
| Replace (*) with Coil Code | See this page Contact factory |
| Factory Modifications available | |

- ① Other voltages available, see Section A in this catalog.
- ② Catalog number (-A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Section Obsolete
See pages F1.56 - F1.88

Custom Multi-Starter Control Panels

From 10 to 100 or more, consult the experts

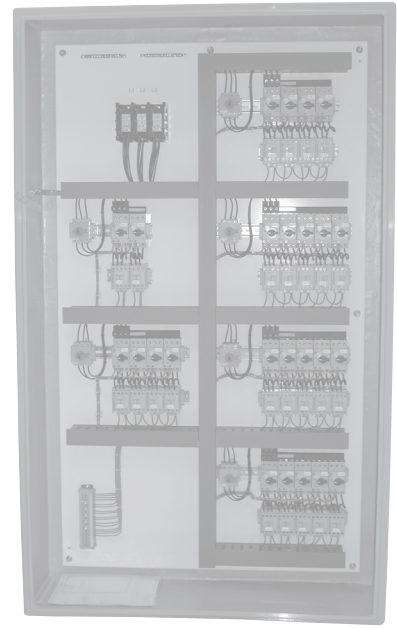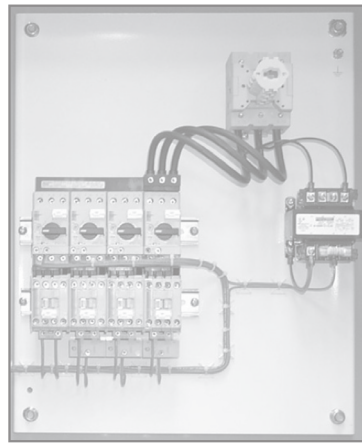

Your Motor Control + Protection Consultant

Sprecher + Schuh's slogan is "Motor control + protection consultant". This means part of our job is to be knowledgeable about these issues and to help customers choose components that not only comply with UL, NEC and CSA standards but also maximizes the SCCR rating of the assembled multi-starter panel, leading to increased protection of equipment and personnel.

Multiple KTU7, KTU7 or KTC7 motor controllers plus matching C750 contactors can be combined in a single assembly as a multi-motor starter custom control panel. Three, 3, 133 or more motor controllers and KTU7 molded case circuit breakers, as well as other power components and control circuits, can be designed and


assembled into a custom multi-motor starter by Sprecher + Schuh to meet customers' unique application requirements. These pages include a few pictures of custom multi-motor control panels built by Sprecher + Schuh. Contact your Sprecher + Schuh motor control and protection representative for consultation regarding design, quotations, or help explaining the complex UL, NEC and CSA codes that apply to a custom assembly.



**Section Obsolete
See pages F1.56 - F1.88**

Enclosed Motor Circuit Controllers

For your Custom application

contact
customquotes@sprecherschuh.com

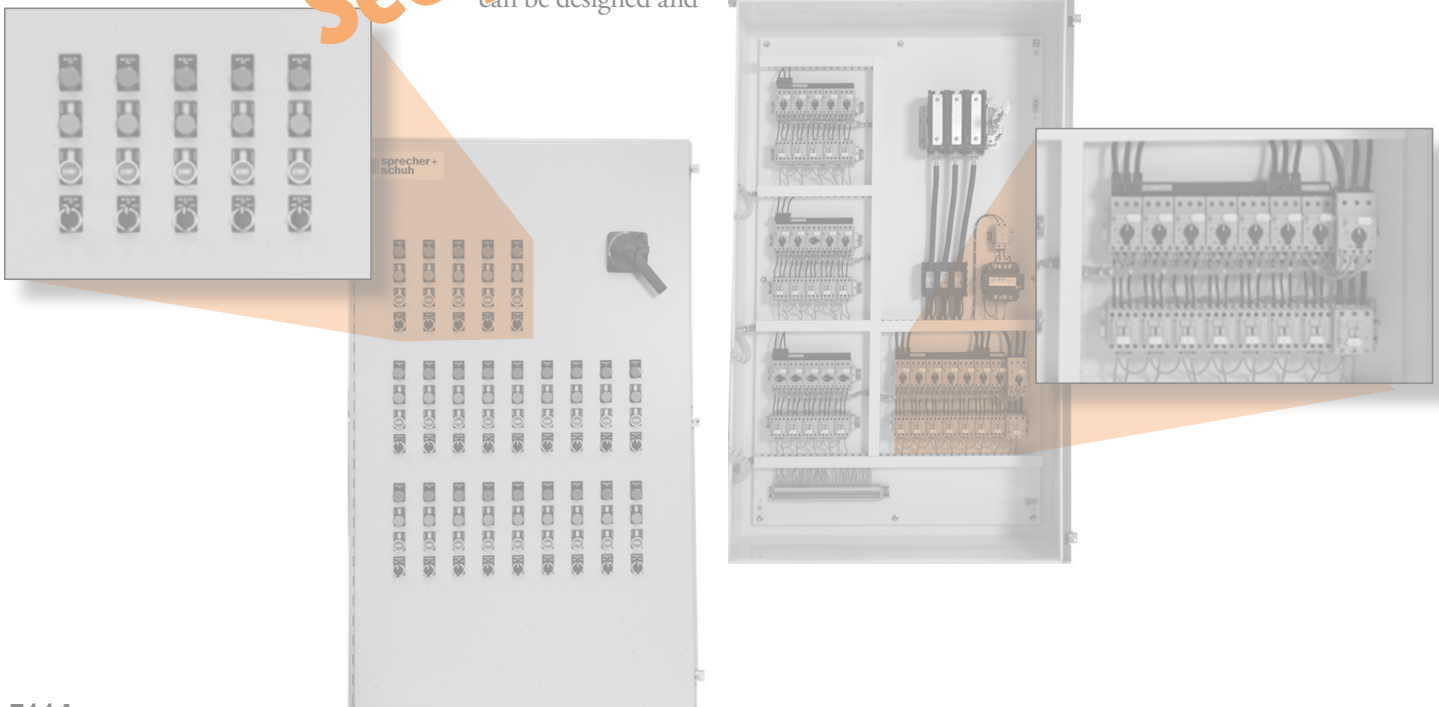

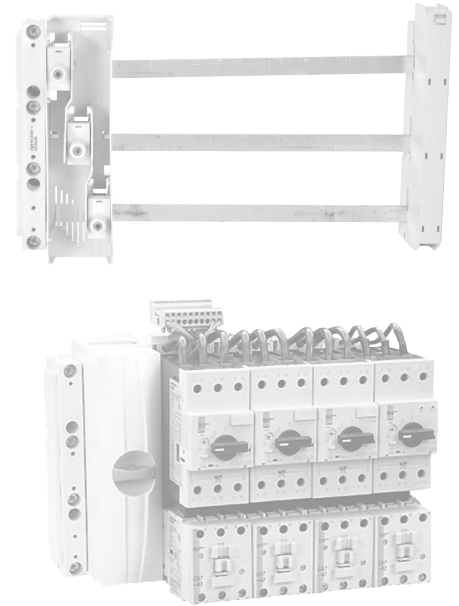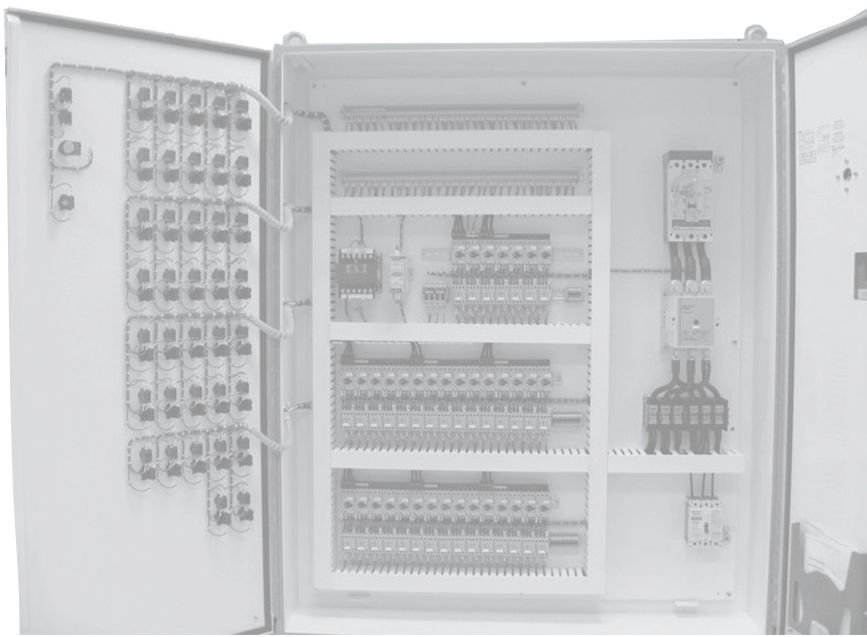

Short Circuit Current Ratings (SSCR)

Short Circuit Current Ratings as defined by UL is a hot topic of discussion within the controls marketplace.

UL 508A Industrial Control Panel specifications require every multiple motor starter panel assembly to be labeled with the Short-Circuit Current Rating (SCCR), which depends on the weakest component's KAIC rating. The SCCR rules are complicated and UL conducts classes around the country on this subject. Sprecher + Schuh conducted a survey of multi-starter panel builders which indicated an increased

concern on the part of panel builders to comply with the UL regulations; yet many do not truly understand the complexity of the rules. This is another reason to consult the experts at Sprecher + Schuh.

Section Obsolete
See pages F1.56 - F1.88

Custom Bus Bar Systems

Sprecher + Schuh has teamed-up with *Wöhner* to supply 3-phase 60 mm bus bar systems. Bus Bar systems offer more flexibility, and a smaller, more economic alternative to a Motor Control Center that uses 'bucket' design.


- Sprecher + Schuh can supply 3-phase 60 mm bus bar components for customer assembly into a control panel.
- We can help design a 3-phase 60 mm bus bar system and provide it with or without components and ship to the customer as open assembly.
- Sprecher + Schuh can help design a 3-phase 60 mm bus bar system and integrate that bus system into an enclosed assembly or multi-starter custom control panel to meet customers' unique specifications.

Please contact your local Sprecher + Schuh Representative or our Technical Support Team to help design our components to meet your needs, which can include building the custom control.





3-Phase 60mm Bus Bar System vertically arranged to maximize space

Single, Two and Three Phase Connection Diagram

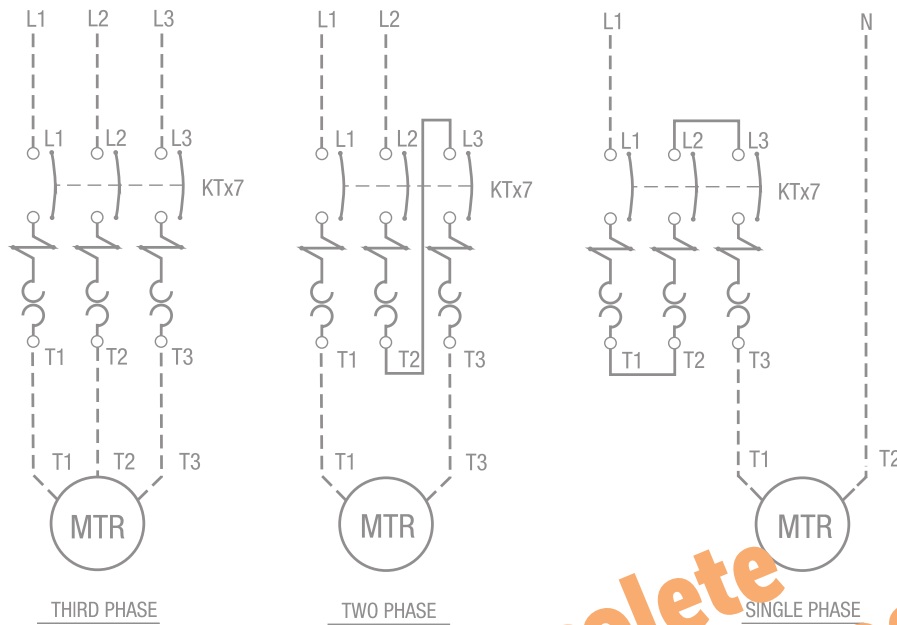


Type E/F Combination Controller, Full Voltage Non-Reversing AC Controller, Direct Start Pilot Devices

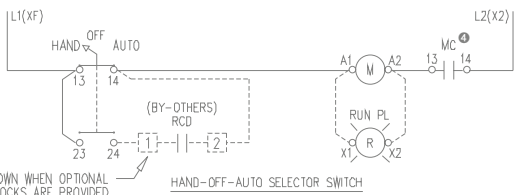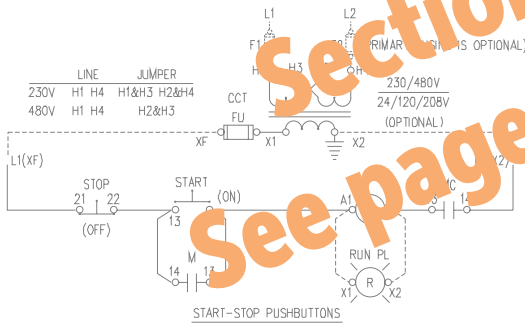


WIRE AS SHOWN WHEN OPTIONAL TERMINAL BLOCKS ARE PROVIDED


HAND-OFF-AUTO SELECTOR SWITCH

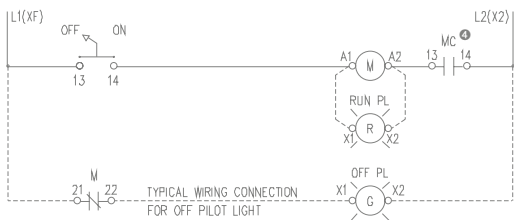

OFF-ON SELECTOR SWITCH

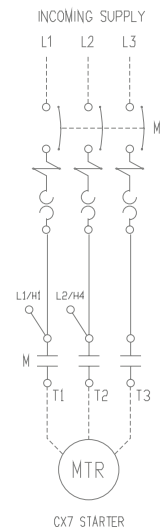

CX7 STARTER

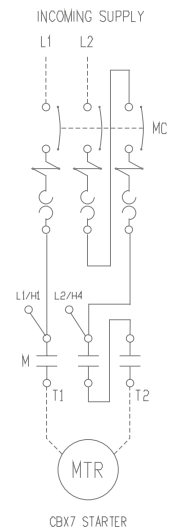

CBX7 STARTER

NOTES:


- 1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER
- 2) MC: KT7 "TYPE E" MOTOR CONTROLLER
- 3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED
- 4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

F

Enclosed Motor Circuit Controllers


Section Obsolete
See pages F1.56 - F1.88

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel with H-O-A, Lead, Lag and Stop 1-Pole Float Switches

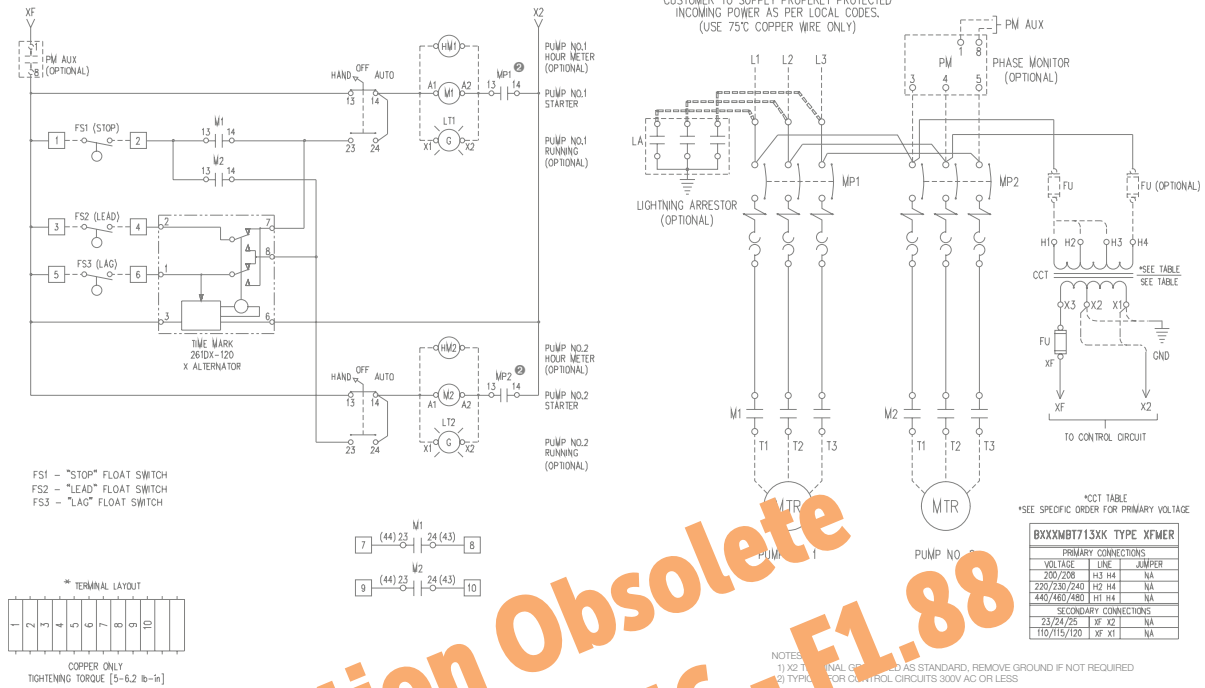





Section Obsolete
See pages F1.56 - F1.88

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel with H-O-A, Alarm Circuit, Lead, Lag, Stop, 1-Pole Float Switches

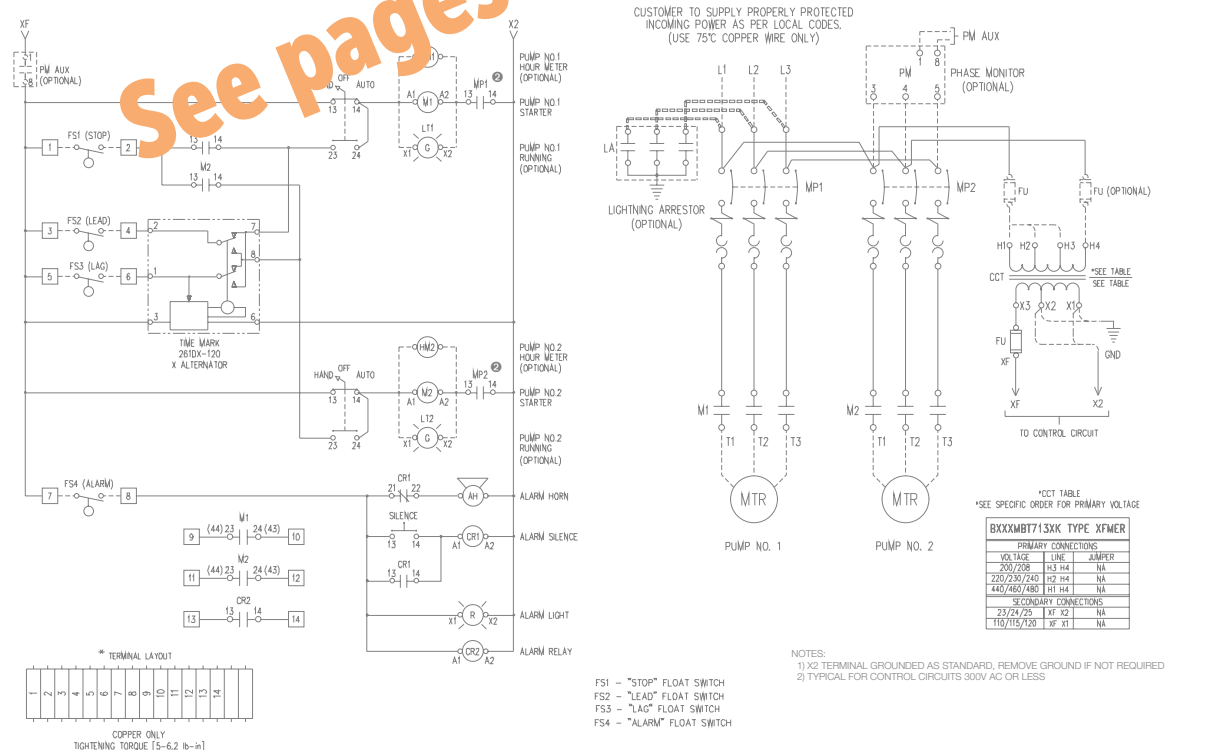


F Enclosed Motor Circuit Controllers

ECombo/EComboPlus/CX7 KWIKstarters Non-Reversing

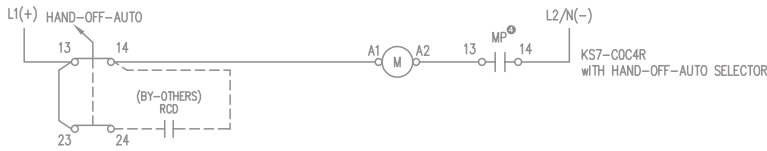

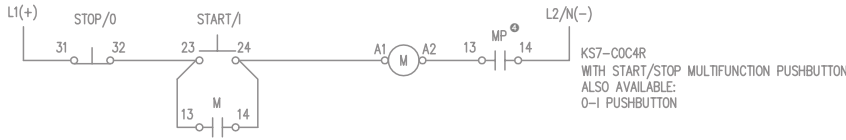


CUSTOMER TO SUPPLY PROPER BRANCH CIRCUIT PROTECTION AS PER LOCAL CODES. (USE 75°C COPPER WIRE ONLY)

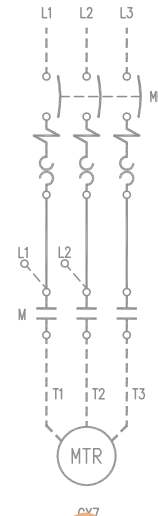


- NOTES:
- 1) MP: KT7 "TYPE E" MOTOR CONTROLLER
 - 2) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
 - 3) OPTIONAL RUN LIGHT MAY BE RED OR GREEN
 - 4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

ECombo/EComboPlus/CX7 KWIKstarters Reversing

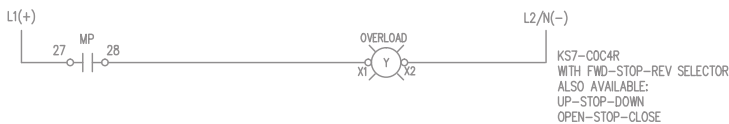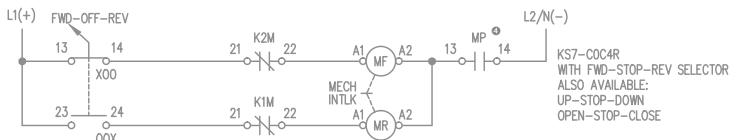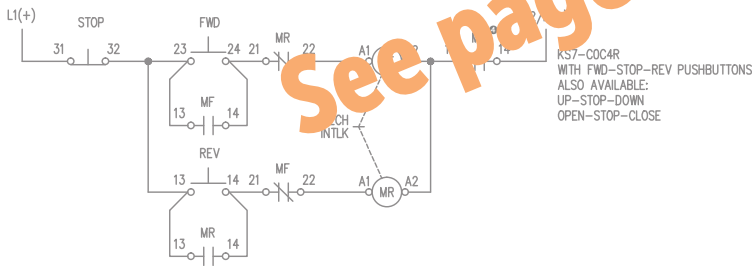

CUSTOMER WILL PROVIDE BRANCH CIRCUIT PROTECTION (F1) SEE THE APPLICATION INSTRUCTION SHEET - COMPONENT SELECTION TABLES FOR MAX. FUSE SIZE, CLASS, AND APPLICABLE SHORT CIRCUIT RATING (USE 75°C COPPER WIRE ONLY)

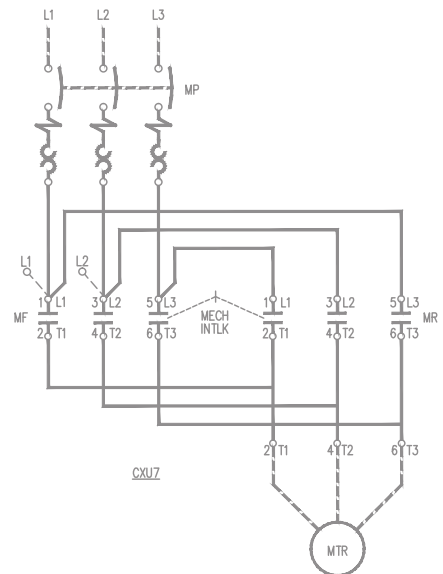

- NOTES:
- 1) MECHANICAL INTERLOCK
 - 2) MP: KT7 "TYPE E" MOTOR CONTROLLER
 - 3) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
 - 4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS


F

Enclosed Motor Circuit Controllers

Section Obsolete See pages F1.56 - F1.88

CX7/CXU7 KWIKstarter Enclosure KS7-COC4R (Dimension Code Q4)

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes.

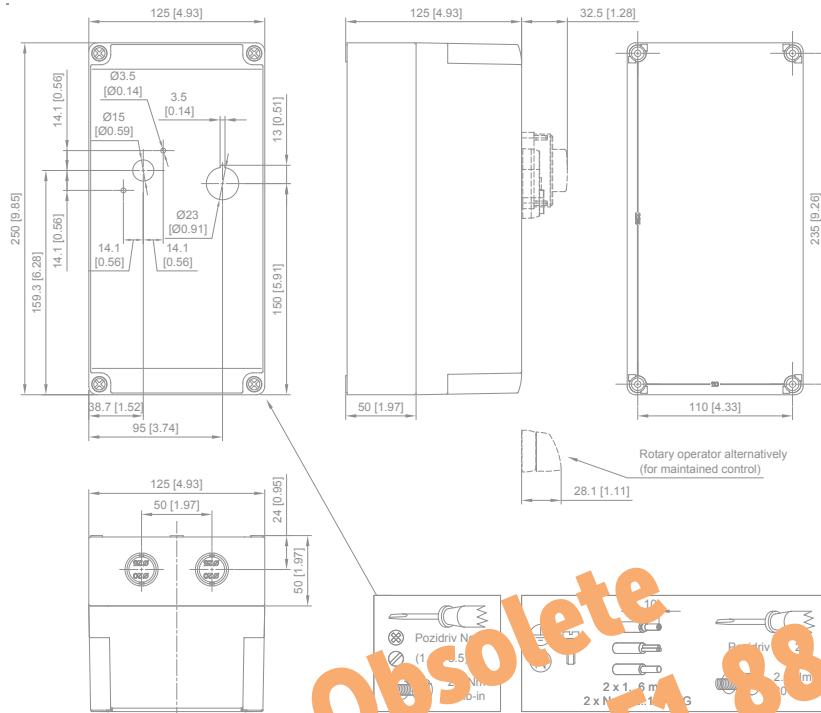

Section Obsolete
See pages F1.56 - F1.88

Enclosure Dimensions

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes. See dimension drawings on next page.

IP65 ENCLOSURE

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | |
|---------------|------------|----------------|-----|------|-----------|-------------|------|-----|--------------------|--|
| | | A | B | C | | D | E | F | | |
| AY | 1 | 5.9 | 9.4 | 5.12 | N/A | N/A | 5.32 | N/A | N/A | |

TYPE-4/4X/12 ENCLOSURE

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | |
|---------------|------------|----------------|------|------|-----------|-------------|-------|-----|--------------------|--|
| | | A | B | C | | D | E | F | | |
| Q5 | 2 | 7.00 | 5.03 | 5.02 | 4.3 | 4.21 | 6.18 | N/A | N/A | |
| Q6 | 3 | 7.00 | 7.00 | 6.02 | 5.3 | 6.18 | 6.18 | N/A | N/A | |
| Q7 | 4 | 11.87 | 7.31 | 10.6 | 7.23 | 6.54 | 11.10 | N/A | N/A | |

TYPE-4/12 & 12 ENCLOSURES

| Encl. ID Dim. | Figure No. | Enclosure Size | | | Mtg Depth | Mtg Centers | | | Panel Size Sub-Pan | | H |
|---------------|------------|----------------|-------|------|-----------|-------------|-------|-------|--------------------|-----|---|
| | | A | B | C | | D | E | F | | | |
| W6 | 5 | 9.84 | 7.87 | 8.24 | 5.31 | 5.31 | 9.13 | 9.09 | 7.13 | - | |
| W7 | 5 | 13.78 | 11.81 | 10.2 | 7.28 | 9.25 | 13.07 | 13.03 | 11.06 | - | |
| L | 6 | 8 | 6 | 6 | 5.53 | 4 | 8.75 | 6.75 | 4.88 | 9.5 | |

TYPE 4/7/9 ENCLOSURES

| Encl. ID Dim. | Figure No. | Mtg. Dim. | | | Inside Dim. | Outside Dim. | | | | Conduit Entry Top & Bot |
|---------------|------------|-----------|------|------|-------------|--------------|------|-------|------|-------------------------|
| | | A | B | C | | D | E | F | G | |
| EX | 7 | 3.25 | 7.75 | 3.5 | 6.0 | 3.0 | 4.56 | 7.06 | 6.25 | 0.75 |
| EY | 7 | 5.50 | 8.50 | 5.50 | 5.50 | 6.0 | 7.0 | 7.0 | 8.84 | 1.0 |
| EZ | 8 | 9.13 | 4.50 | 6.0 | 8.0 | 6.63 | 9.25 | 11.25 | 9.34 | 1.50 |

Enclosures

See Enclosure Dimension Charts on Previous Page.




FIGURE NO. 1




FIGURE NO. 2




FIGURE NO. 3










FIGURE NO. 4




Section Obsolete
See pages F1.56 - F1.88

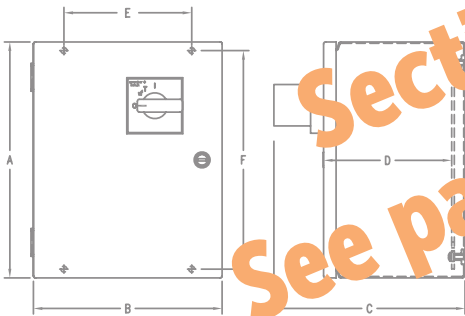

TYPE 4/12
FIGURE NO. 5




TYPE 12
FIGURE NO. 6

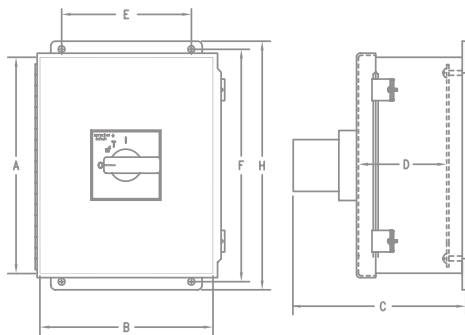

1/2 NPT
BOTTOM
ONLY

FIGURE NO. 7

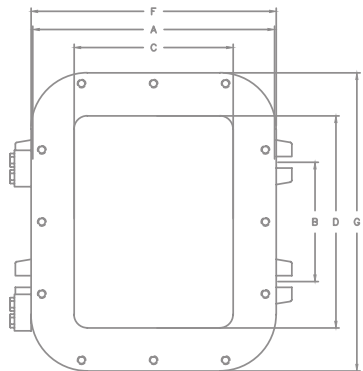

1/2 NPT
BOTTOM
ONLY

FIGURE NO. 8

F
Enclosed Motor Circuit Controllers

KT4 Manual Motor Starter

DISCONTINUED



Ideal for use as a manual starter

The KT4 is a manual motor starter that employs the features of power switching, thermal overload protection and control circuit signaling in one compact unit. This manual motor starter has the advantage of a high speed magnetic trip mechanism which limits the let-through current under short-circuit conditions. The KT4 can be supplied with field installable shunt trip or an under voltage trip unit which exceeds the capabilities of the classic manual motor starter. This manual motor starter is available in a variety of enclosures including general purpose, watertight and explosion proof (the most compact on the market today).

KT4 Reduces panel space and saves money in Group Motor Installations

The KT4 can eliminate the need for larger and more expensive fuse blocks and fused disconnects, or circuit breakers. The potential cost savings in group motor installations according NEC 430-53c can be as much as 35% over conventional methods of branch circuit protection. And, because so many features are combined into one small unit, panel space can be slashed by as much as 60%.

In addition, the KT4 line offers a wide application range from 0.1 to 16 FLA in installations up to 600V. For group motor applications, the KT4 series has a 250A group installation rating, with a withstand rating as high as 42 KAIC.



Excellent short circuit and thermal overload protection

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid build-up of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability the let-through current is significantly reduced and the potential for damage is limited.

Because each KT4 is individually calibrated at the factory for the smallest and largest current, very accurate thermal overload protection is also obtained. In addition, the KT4 is a Class 10 device ... it trips within 10 seconds under a locked rotor condition (6 x FLA). Every KT4 Manual Motor Starter is equipped with automatic ambient temperature compensation, which continually adjusts to surrounding temperatures. As a result, trip times remain constant and accurate.

Accessories add versatility

Whether in group motor installations or as a manual motor starter, numerous field installable accessories are available to enhance the KT4's performance:

- **Auxiliary Contact Blocks** – are available for internal or external mounting providing signal switching capability for control circuits.
- **Shunt trip and Undervoltage Release Modules** – provides the ability to remotely actuate the KT4 in emergency situations or continuously monitor the line voltage.
- **Enclosures** – are available in general protection (IP41), or watertight (IP55), complete with lockable accessories.
- **Compact Bus Bar System** – reduces the task of line side wiring in multiple motor starter installations which reduces the labor cost of installation.

F

KT4 Manual Motor Starters

KT4 Manual Motor Starter ①

| Maximum Horsepower ①② | | | | | | O/L Relay Ampere Response ④ | Magnetic Response Current | Ordering Information ① |
|-----------------------|-------|---------|-------|------|-------|-----------------------------|---------------------------|------------------------|
| Single Ø ② | | Three Ø | | | | | | Catalog Number |
| 115V | 230V | 200V | 230V | 460V | 575V | | | |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.1 - 0.16 | 1.8 | KT4-C2A-A16 |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.16 - 0.25 | 2.8 | KT4-C2A-A25 |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.25 - 0.4 | 4.4 | KT4-C2A-A40 |
| ~ | ~ | ~ | ~ | ~ | ~ | 0.4 - 0.63 | 6.9 | KT4-C2A-A63 |
| ~ | ~ | ~ | ~ | ~ | 1/2 | 0.63 - 1.0 | 11 | KT4-C2A-B10 |
| ~ | 1/10 | ~ | ~ | 1/2 | 3/4 | 1.0 - 1.6 | 18 | KT4-C2A-B16 |
| 1/10 | 1/6 | 1/2 | 1/2 | 1 | 1-1/2 | 1.6 - 2.5 | 28 | KT4-C2A-B25 |
| 1/8 | 1/3 | 3/4 | 3/4 | 2 | 3 | 2.5 - 4.0 | 44 | KT4-C2A-B40 |
| 1/4 | 1/2 | 1 | 1-1/2 | 3 | 5 | 4.0 - 6.3 | 69 | KT4-C2A-B63 |
| 1/2 | 1-1/2 | 2 | 3 | 5 | 7-1/2 | 6.3 - 10 | 110 | KT4-C2A-C10 |
| 1 | 2 | 3 | 5 | 10 | 10 | 10 - 16 | 176 | KT4-C2A-C16 |

F

KT4 Manual Motor Starters

Short Circuit Ratings ⑤

| Catalog Number | Manual Motor Starter / Group Installation Ratings | | |
|----------------|---|------|--|
| | Short Circuit Rating (kA) | | Maximum Branch Circuit Protection Rating ⑤ |
| | 480V | 600V | Amperes |
| KT4-C2A-A16 | 42 | 42 | 250 |
| KT4-C2A-A25 | 42 | 42 | 250 |
| KT4-C2A-A40 | 42 | 42 | 250 |
| KT4-C2A-A63 | 42 | 42 | 250 |
| KT4-C2A-B10 | 42 | 42 | 250 |
| KT4-C2A-B16 | 42 | 42 | 250 |
| KT4-C2A-B25 | 42 | 10 | 250 |
| KT4-C2A-B40 | 18 | 5 | 250 |
| KT4-C2A-B63 | 18 | 5 | 250 |
| KT4-C2A-C10 | 10 | 5 | 250 |
| KT4-C2A-C16 | 10 | 5 | 250 |

① Horsepower ratings shown are the maximum rating of the switching capacity of the main contactors. **The final selection of the manual starter depends on the actual motor full load amps and service factor.**

Example #1:

For a motor with a service factor of 1.15 or greater, use the motor nameplate full load amps and choose the motor starter with the appropriate current range.

Motor F.L.A. 4.2A
Service Factor 1.15

Select catalog number **KT4-C2A-A63** (Range 4.0-6.3 Amps)

Example #2:






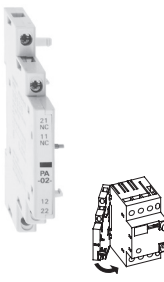



For a motor with a service factor less than 1.15, use the motor nameplate full load amps times 0.9 and choose the motor starter with the appropriate current range.



Motor F.L.A. 4.2A
Service Factor 1.0
Multiplier x 0.9
Effective Current = 3.78A

Select catalog number **KT4-C2A-A40** (Range 2.5-4.0 Amps)





- ② Single phase horsepower ratings are based on wiring the 3 poles of the device in series.
- ③ The KT4 motor circuit controller is approved for use in group installation according to NEC 430-53C. Reference Sprecher+Schuh UL file #E54612.
- ④ The actual trip current is 120% of the dial setting.
- ⑤ Although UL Testing of Manual Motor Starters allows for Group Installation with upstream Branch Circuit Protection maximum ratings as high as 250 amperes; it should be noted that NEC 2002 contains new restrictions under NEC 430-53D "Single Motor Taps". KT4 should be applied as outlined in NEC 430-53D-1 or 430-53-D-2 to be in compliance. KT4 does not qualify as "Tap Conductor Protection" as required under NEC 430-53-D-3. Please refer to the Application notes located at the end of the KT7 section for more details on compliance.

Accessories for KT4


| Accessory | Description | Wiring Diagram | Catalog Number |
|--|---|--|---------------------|
|  | Auxiliary Contact Block (NO) - mounts internally. |  | KT4-C-AEA10 |
| | Auxiliary Contact Block (NO) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact. |  | KT4-C-AEA210 |
| | Auxiliary Contact Block (NC) - mounts internally. |  | KT4-C-AEA01 |
| | Auxiliary Contact Block (NC) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact. |  | KT4-C-AEA201 |
|  | Two pole Auxiliary Contact Block (NO/NC) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing |  | KT4-C-ASA11 |
| | Two pole Auxiliary Contact Block (NO/NO) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing. |  | KT4-C-ASA20 |
| | Two pole Auxiliary Contact Block (NC/NC) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing. |  | KT4-C-ASA02 |

| Accessory | Description | Catalog Number |
|---|---|------------------|
|  | Adaptor Plate Provides capability to base mount one KT4 | KT4-C-N12 |
|  | Locking Fixture Padlocking attachment for one KT4-25. Locks in the OFF position only. Metal construction. Holds one to three padlocks with 6mm hasps. | KT4-C-M3 |

Accessories for KT4 (continued from previous page)





| Accessory | Description | Wiring Diagram | AC Coil Voltage | | Catalog Number |
|---|---|---|--|---|---|
| | | | 50 HZ | 60 HZ | |
|  | Undervoltage Release Module - mounts on right hand side, Prevents KT4 from operating unless voltage is present. |  | 24V | ~ | KT4-C-UXX |
| | | | ~ | 24V | KT4-C-UXJ |
| | | | ~ | 48V | KT4-C-UXX |
| | | | 110V | 110V | KT4-C-UXKD |
| | | | 110V | 120V | KT4-C-UXD |
| | | | 220...230V | 240...260V | KT4-C-UXF |
| | | | ~ | 240...260V | KT4-C-UXA |
| | | | 240V | 277V | KT4-C-UXT |
| | | | 400V | 460V | KT4-C-UXN |
| | | | 415V | 480V | KT4-C-UXB |
| | | | 500V | 575V | KT4-C-UXM |
| | | |  | Shunt Release Module - mounts on right hand side. Remotely trips the KT4 . |  |
| ~ | 24V | KT4-C-SXJ | | | |
| ~ | 48V | KT4-C-SXX | | | |
| 110V | 110V | KT4-C-SXKD | | | |
| 110V | 120V | KT4-C-SXD | | | |
| 220...230V | 240...260V | KT4-C-SXF | | | |
| ~ | 240...260V | KT4-C-SXA | | | |
| 240V | 277V | KT4-C-SXT | | | |
| 400V | 460V | KT4-C-SXN | | | |
| 415V | 480V | KT4-C-SXB | | | |
| 500V | 575V | KT4-C-SXM | | | |



F KT4 Manual Motor Starters

| Accessory | Description | Voltage / Rated Current | Catalog Number |
|---|---|----------------------------|----------------|
|  | Connecting Module ①- Provides a solid "wireless" connection between a KT4 Motor Circuit Controller and a CA7 contactor. Connects CA7-9...23 | 20A | KT4-C-PNC23 |

① cULus Approved (File E33916).





Accessories for KT4 (continued from previous page)

| Accessory | Description | Enclosure Rating | Catalog No. ① |
|--|--|---|-------------------|
|  KT4-C-EA55 | Enclosures for Surface Mounting - Includes ground and neutral terminals. | General Purpose (IP41) | KT4-C-EA41 |
| | | Watertight (IP55) | KT4-C-EA55 |
|  KT4-C-EE55 | Enclosure for Flush Mounting - includes protective earth and neutral wire terminals. | General Purpose (IP41) | KT4-C-EE41 |
| | | Watertight (IP55) | KT4-C-EE55 |
|  | Enclosure Locking Fixture - Holds one to three padlocks with 6mm hasps. | For use with KT4-C-EA41 and KT4-C-EA55 enclosures | KT4-C-M3E |
|  | Enclosure Membrane - Replacement membrane. Includes 4 mounting screws (membrane only, does not include mounting frame). | For replacement on KT4-C-EA55 or -EE55 or to upgrade KT4-C-EA41 or -EE41 enclosures | KT4-C-N55 |

| Accessory | Description | Kit Catalog No. | For Use With | Assembled Cat No. ① |
|---|--|-----------------|--------------|----------------------|
|  KT4-C-MT-EA55 | Emergency Stop Kit Twist-To-Release | KT4-C-MT | KT4-C-EA41 | KT4-C-MT-EA41 |
| | | | KT4-C-EE41 | KT4-C-MT-EE41 |
| | | | KT4-C-EA55 | KT4-C-MT-EA55 |
| | | | KT4-C-EE55 | KT4-C-MT-EE55 |
|  KT4-C-MK-EA55 | Emergency Stop Kit Key Release | KT4-C-MK | KT4-C-EA41 | KT4-C-MK-EA41 |
| | | | KT4-C-EE41 | KT4-C-MK-EE41 |
| | | | KT4-C-EA55 | KT4-C-MK-EA55 |
| | | | KT4-C-EE55 | KT4-C-MK-EE55 |





① KT4 Manual Motor Starter Not Included. Consult a Sprecher + Schuh representative for an assembly including a KT4.

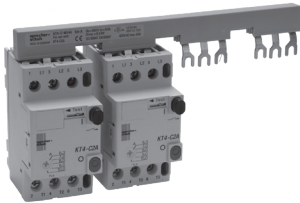Compact Bus Bar System for KT4


| Accessory | Description | Catalog Number |
|---|--|--|
|  | <p>Compact Bus Bar - 45mm spacing - Bus bar with 45mm spacing accepts KT4's with <i>or without</i> internally mounted auxiliary or trip signal contact. Rated to 65A (UL)/63A (IEC).</p> <p>Connects two KT4's Connects three KT4's Connects four KT4's Connects five KT4's</p> | <p>KT4-C-W452 KT4-C-W453 KT4-C-W454 KT4-C-W455</p> |
|  | <p>Compact Bus Bar - 54mm spacing - Bus bar with 54mm spacing accepts KT4's with side mounted auxiliary contact (type PA-11). Rated to 65A (UL)/63A (IEC).</p> <p>Connects two KT4's Connects three KT4's Connects four KT4's Connects five KT4's</p> | <p>KT4-C-W542 KT4-C-W543 KT4-C-W544 KT4-C-W545</p> |
|  | <p>Supply Block - Provides connection from bus bar to power.</p> | <p>KT4-C-WT</p> |
|  | <p>Blank Space Cover - Covers bus bar connections where no KT4 is mounted.</p> | <p>KT4-C-WS</p> |

F
KT4 Manual Motor Starters

Technical Information

| | | |
|---|---|--|
| Standards Approvals | KT4... UL 508; CSA22.2; EN/IEC 60947-1/-2/-4/-5-1/ UL, CSA, CE, SEV, Germ. Lloyd, CEBC, PTB, DEMKO, SEMKO, SETI, NEMKO, Bureau Veritas, Lloyd's Register of Shipping, Maritime Register of Shipping, RINA, KEMA | |
| Approvals / Markings | CE, cULus Listed | |
| Rated Insulation Voltage | | |
| IEC, SEV, VDE0660 [V] | | 690 |
| UL, CSA [V] | | 600 |
| Rated Impulse Withstand Voltage | | |
| Main circuits | | 6 kV |
| Auxiliary circuits | | 6 kV |
| Rated Frequency [Hz] | | 40...60 |
| Rated Operating Current [A] | | 0.1...16 (11 ranges) |
| Life | | |
| Mechanical [operations] | | 100,000 |
| Electrical [operations] | | 50,000 |
| Switching Frequency | | Max. 30 operating cycles/hour |
| Ambient Temperature | | |
| Storage | | -25°C to +80°C |
| Operation | | -25°C to +60°C |
| Resistance to climatic change | | |
| Humid heat | | 40°C, 92%, 56 days |
| Alternating climatic conditions | | 23°C, 83%/40°C, 93%, 56 cycles |
| Degree of Protection | | IP20 (when wired) |
| Impact Resistance (shock) | | 50g, 11ms |
| Vibration Strength | | |
| Frequency Range | | 10...150Hz |
| In all directions | | >7.5g |
| Overload Protection | | |
| Tripping Time | | Class 10 |
| Phase failure protection | | See time/current curve |
| Temperature Compensation | | -20°C... +60°C (70°C=15% current reduction of upper rated current) |
| Magnetic Response | | 11 x I _e max. (fixed setting) (I _e max. = max value of the setting range) |
| Total Power dissipation | | |
| Manual motor starter at rated load [W] | | 7 |
| Terminal Connections | | |
| Type of terminals | |  |
| Screwdriver | | Position No. 2/Blade No. 3 |
|  | 1. conductor | 1 to 4 mm ² / 16 to 12 AWG |
| | 2. conductor | 1 to 4 mm ² / 16 to 12 AWG |
|  | 1. conductor | 1 to 6 mm ² / 16 to 12 AWG |
| | 2. conductor | 1 to 6 mm ² / 16 to 12 AWG |
|  | 1. conductor | 1.5 to 6 mm ² / 16 to 12 AWG |
| | 2. conductor | 1.5 to 6 mm ² / 16 to 12 AWG |
| Tightening torque | | 2 to 2.5 Nm / 18 to 22 lb-in |







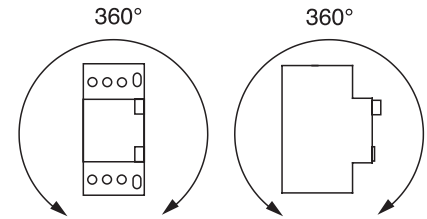

Mounting Position - KT4












Weights

| Description | Catalog Number | Weight |
|---|----------------|--------|
| Manual Motor Starter | KT4-C2A... | 290 g |
| Auxiliary Contact Blocks for Flush Mounting | KT4-C-AEA | 12 g |
| Auxiliary Contact Blocks for Left-side Mounting | KT4-C-ASA | 35 g |
| Undervoltage Release | KT4-C-UX | 104 g |
| Shunt Release | KT4-C-SX | 100 g |
| Bus Bar Feeder Terminal | KT4-C-WT | 36 g |
| Compact Bus Bar | KT4-C-W452 | 42 g |
| | KT4-C-W453 | 69 g |
| | KT4-C-W454 | 94 g |
| | KT4-C-W455 | 119 g |
| | KT4-C-W542 | 45 g |
| | KT4-C-W543 | 76 g |
| KT4-C-W545 | 104 g | |
| KT4-C-W545 | 135 g | |
| Blank Space Cover | KT4-C-WS | 3.3 g |
| Emergency-Stop Push Button | KT4-C-MT | g |
| | KT4-C-MK | g |
| Enclosure for Surface Mounting | KT4-C-EA41 | 250 g |
| Enclosure for Flush Mounting | KT4-C-EA55 | 258 g |
| Button Membrane | KT4-C-EE41 | 126 g |
| | KT4-C-EE55 | 134 g |
| Indicator Light | KT4-L... | 10 g |
| Hut (DIN) rail Adapter | KT4-C-N12 | 16 g |
| | KT4-C-M3E | 19 g |
| Locking Arrangement | KT4-C-M3 | 11 g |

Technical Information

| Specifications of Accessories | KT4-C-AEA... Auxiliary Contact Block for Flush Mounting | KT4-C-ASA... Auxiliary Contact Block for Left-side Mounting |
|--|---|---|
| Rated Thermal Current / _{th} at 40°C ambient temperature [A] | 6 | 10 |
| at 60°C ambient temperature [A] | 4 | 6 |
| Contact Class Coordination According to NEMA (UL/CSA Standards) [AC] [DC] | B 600 Standard Pilot Duty R 300 Light Pilot Duty | B 600 Standard Pilot Duty R 300 Light Pilot Duty |
| Back-Up Fuses gG, gL [A] | 16 | 16 |
| Rated Supply current [V] | 230/240 400/415 500 690 | 230/240 400/415 500 690 |
| AC-15 [A] | 2 1 0.8 0.5 | 2 1 0.8 0.5 |
| DC-13 [V] | 24 48 110 220 | 24 48 110 220 |
| [A] | 2 0.6 0.2 0.1 | 2 0.6 0.2 0.1 |
| Terminal Parts |  | |
| Type of terminals | Pozidrive No. 2 / Blade No. 3 | |
| Screwdriver |  | |
|  1. conductor | 0.75 to 2.5 mm ² / 18 to 14 AWG | 0.75 to 2.5 mm ² / 18 to 14 AWG |
|  2. conductor | 0.75 to 2.5 mm ² / 18 to 14 AWG | 0.75 to 2.5 mm ² / 18 to 14 AWG |
|  1. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG |
|  2. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG |
|  1. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG |
|  2. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG |
| Tightening torque | 1 to 1.5 Nm / 9 to 13 lb-in | 1 to 1.5 Nm / 9 to 13 lb-in |

| | KT4-C-UX... Undervoltage Release Unit for Right-side Mounting | KT4-C-SX... Shunt Release for Right-side Mounting | KT4-C-WT Supply Block |
|--|---|---|---|
| Actuating Voltage | | | |
| Pull-in | 0.8 to 1.1 x U _s | 0.7 to 1.1 x U _s | |
| Drop-out | 0.7 to 0.35 x U _s | ~ | |
| Rated Control Voltage min. | 12V 50 Hz, 14V 60 Hz | 12V 50 Hz, 14V 60 Hz | |
| max. | 600V 50 Hz | 600V 50 Hz | |
| On-Time | 100 % | 100 % | |
| Coil Rating Pull-in | 8.5 VA, 6 W | 8.5 VA, 6 W | |
| Hold | 3 VA, 1.2 W | 3 VA, 1.2 W | |
| Terminal Parts | | | |
| Type of terminals |  |  |  |
| Screwdriver | Pozidrive No. 2/Blade No. 3 | Pozidrive No. 2/Blade No. 3 | Pozidrive No. 2/Blade No. 3 |
|  1. conductor | 0.75 to 2.5 mm ² / 18 to 14 AWG | 0.75 to 2.5 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
|  2. conductor | 0.75 to 2.5 mm ² / 18 to 14 AWG | 0.75 to 2.5 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
|  1. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
|  2. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
|  1. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
|  2. conductor | 0.75 to 4 mm ² / 18 to 14 AWG | 0.75 to 4 mm ² / 18 to 14 AWG | 4 to 16 mm ² / 14 to 6 AWG |
| Tightening torque | 1 to 1.5 Nm / 9 to 13 lb-in | 1 to 1.5 Nm / 9 to 13 lb-in | 4 Nm / 36 lb-in |

| | KT4-C-W45... Compact Bus Bar | KT4-C-W54... Compact Bus Bar |
|---|---------------------------------|---------------------------------|
| Rated Insulation Voltage U_i [V] | 690 | 690 |
| Rated Thermal Current I_{th} [A] | 63 | 63 |

| | KT4-C-EA41 / -EE41 Enclosure | KT4-C-EA55 / -EE55 Enclosure | KT4-C-L... Indicator Light |
|------------------------------------|---------------------------------|--|-------------------------------|
| IP Protection | IP41 | IP55 (with seal and protective membrane) | IP54 |
| Ambient Temperature [°C] | - 25...+ 40 | - 25...+ 40 | ~ |
| Rated Operating Voltage [V] | ~ | ~ | 120, 240, 415, 480 |

F KT4 Manual Motor Starters


IEC Performance Data (KT4-C2A)

| | | -A16 | -A25 | -A40 | -A63 | -B10 | -B16 | -B25 | -B40 | -B63 | -C10 | -C16 |
|---|------|-------------------|------|------|-----------|-----------|-----------|------|-----------|---------|---------|---------|
| Switching of standard three phase motors | | | | | | | | | | | | |
| AC-2, AC-3 | | | | | | | | | | | | |
| 230/240V | [kW] | ~ | ~ | ~ | 0.06/0.09 | 0.12 | 0.18/0.25 | 0.37 | 0.55/0.75 | 1.1/1.5 | 2.2 | 3.0/4.0 |
| 400/415V | [kW] | 0.02 | 0.06 | 0.09 | 0.18/.25 | 0.25 | 0.37/0.55 | .75 | 1.1/1.5 | 2.2 | 3.0/4.0 | 5.5/7.5 |
| 500V | [kW] | ~ | ~ | ~ | 0.18 | 0.25/0.37 | 0.55/0.75 | 1.1 | 1.5/2.2 | 2.5/3.0 | 4.0/6.3 | 7.5/10 |
| 690V | [kW] | ~ | ~ | ~ | 0.25 | 0.37/0.55 | 0.75/1.1 | 1.8 | 2.2/3.0 | ~ | ~ | ~ |
| Back-up fuses | | | | | | | | | | | | |
| gG, aM, only if $I_{cc} > I_{cu}$ | | | | | | | | | | | | |
| 230/240V | [A] | No Fuses Required | | | | | | ~ | ~ | ~ | ~ | 50 |
| 400/415V | [A] | | | | | | | ~ | ~ | ~ | 63 | 50 |
| 500V | [A] | | | | | | | ~ | ~ | 63 | 50 | 50 |
| 690V | [A] | | | | | | | 25 | 35 | ~ | ~ | ~ |
| Ultimate short-circuit breaking capacity I_{cu} | | | | | | | | | | | | |
| 230/240V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 50 | 50 | 50 | 3 |
| 400/415V | [kA] | 65 | 65 | 65 | 65 | 65 | 65 | 50 | 10 | 10 | 8 | 6 |
| 500V | [kA] | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 3 | 10 | 4.5 | 4.5 |
| 690V | [kA] | 50 | 50 | 50 | 50 | 50 | 50 | 4.5 | 2 | ~ | ~ | ~ |


CSA Performance Data (KT4-C2A)

| | | -A16 | -A25 | -A40 | -A63 | -B10 | -B16 | -B25 | -B40 | -B63 | -C10 | -C16 |
|--------------------------------------|------|------|------|------|------|------|------|-------|------|-------|-------|------|
| Maximum short-circuit current | | | | | | | | | | | | |
| 480V | [kA] | 42 | 42 | 42 | 42 | 42 | 42 | 42 | 18 | 18 | 10 | 5 |
| 600V | [kA] | 42 | 42 | 42 | 42 | 42 | 42 | 10 | 5 | 5 | 5 | 5 |
| Motor load | | | | | | | | | | | | |
| 1-phase | | | | | | | | | | | | |
| 115V | [HP] | ~ | ~ | ~ | ~ | ~ | ~ | 1/10 | 1/8 | 1/4 | 1/2 | 1 |
| 230V | [HP] | ~ | ~ | ~ | ~ | ~ | 1/10 | 1/6 | 1/3 | 3/4 | 1 1/2 | 3 |
| 3-phase | | | | | | | | | | | | |
| 200V | [HP] | ~ | ~ | ~ | ~ | ~ | ~ | 1/2 | 3/4 | 1 1/2 | 2 | 3 |
| 230V | [HP] | ~ | ~ | ~ | ~ | ~ | ~ | 3/4 | 1 | 2 | 3 | 5 |
| 460V | [HP] | ~ | ~ | ~ | ~ | 1/2 | 1 | 1 1/2 | 3 | 5 | 7 1/2 | 10 |
| 575V | [HP] | ~ | ~ | ~ | ~ | 3/4 | 1 | 2 | 3 | 5 | 10 | 15 |

Auxiliary Contact & Trip Indicator Contact Development ①

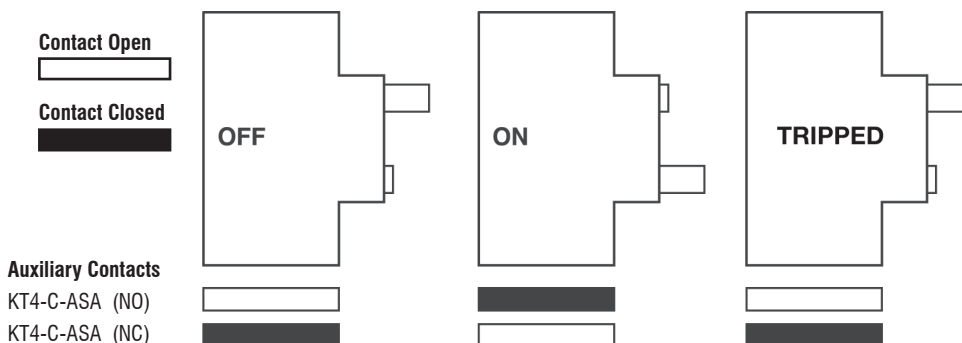


① KT4 leaves the factory in the Auto Reset mode. This means the Off and Trip positions are the same. If a true trip position is required, consult your Sprecher + Schuh representative.

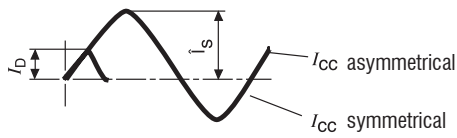


The KT4-C2A manual motor starter limits short-circuit current I_{cc} (prospective short-circuit current). I_D is the maximum cut-off current (highest instantaneous value of the limited short-circuit current). This value is indicated in the following diagram as a function of the system short-circuit current.

Correspondingly the maximum forward $i^2 dt$ energy is limited. This value is indicated in the following diagram as a function of the system short-circuited current.


KT4-C2A
Max. Let-Through (cut-off) Current, $U_e = 400...415V$

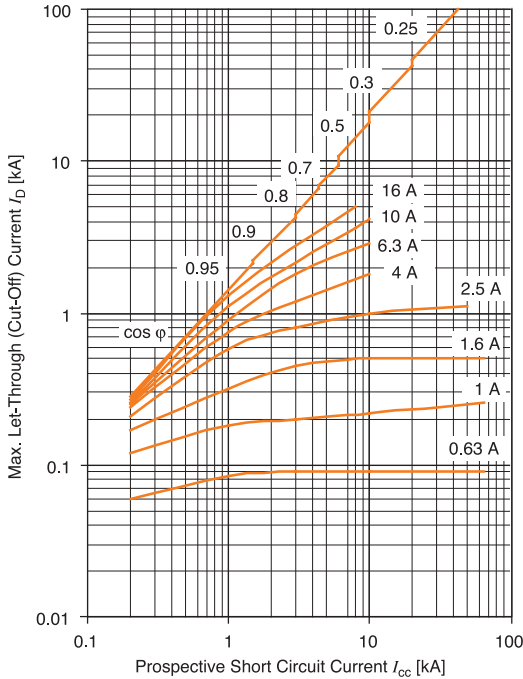

KT4-C2A
Max. Let-Through Energy, $U_e = 400...415V$

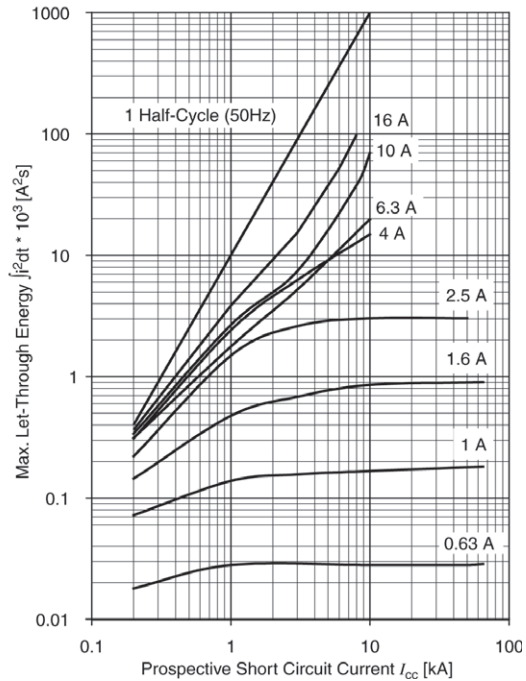

KT4-C2A
Time / current characteristics

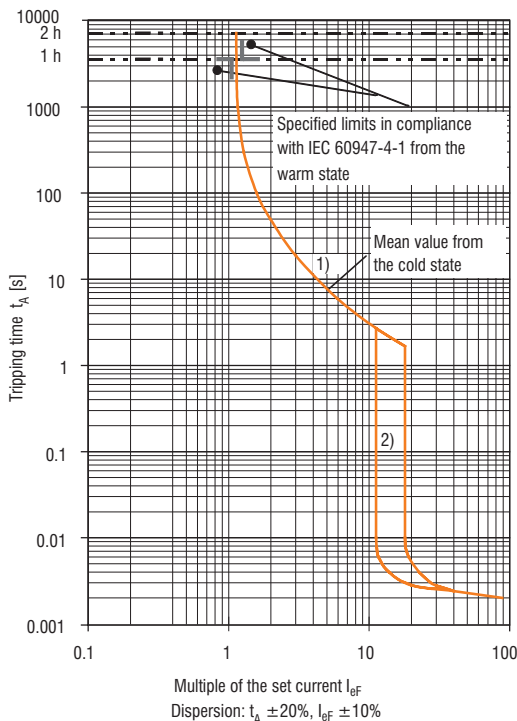

1) Operating Current of Thermal Releases:

The adjustable inverse bimetal trip reliability protects motors against overloads. The curve shows the mean operating current at an ambient temperature of 20°C starting from cold.

In equipment at operating temperature, release time is less than or equal to release time from the cold state.

2) Operating Current of Magnetic Releases:


Electromagnetic instantaneous releases react at a fixed tripping current.

At the upper thermal release setting, this tripping current is 11 times the set current.

Current To Be Set:

Thermal releases meet the requirements for a thermal release of a starter in accordance with IEC 60947-4-1 f. If a different value is specified (such as reduced I_e in motors with an ambient temperature higher than 40°C or a site altitude >2000 m above sea level), the rated operating current I_e must be adjusted.

Single, Two and Three Phase Connection Diagram


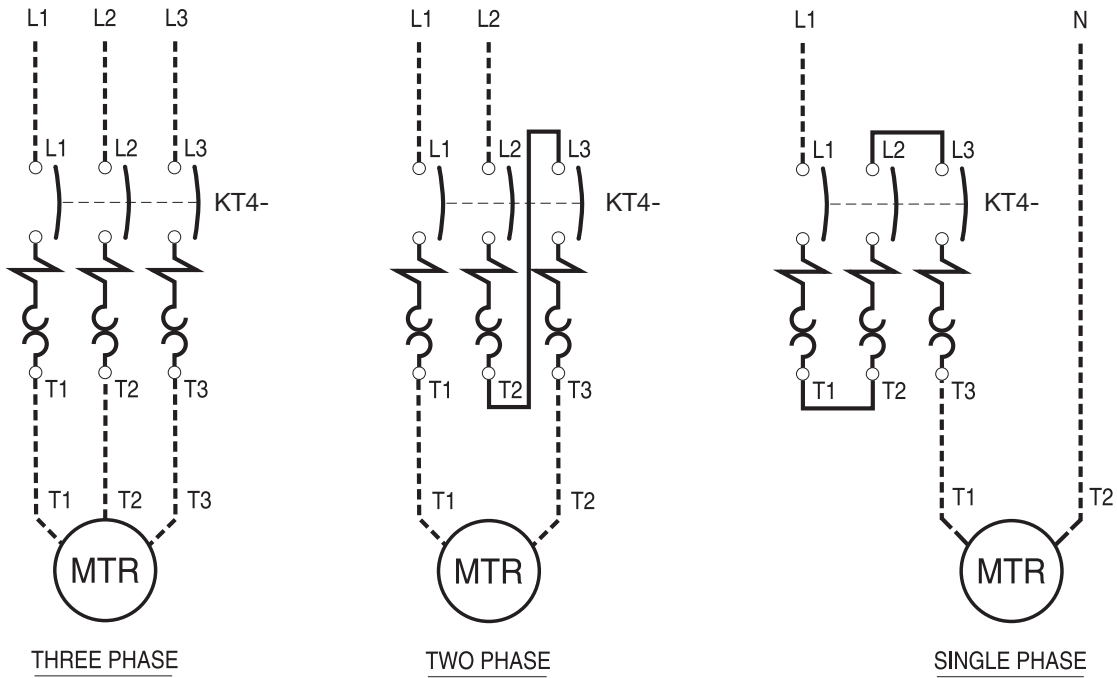


F
KT4 Manual Motor Starters

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

KT4 Motor Circuit Controller



KT4 with Compact Bus Bar

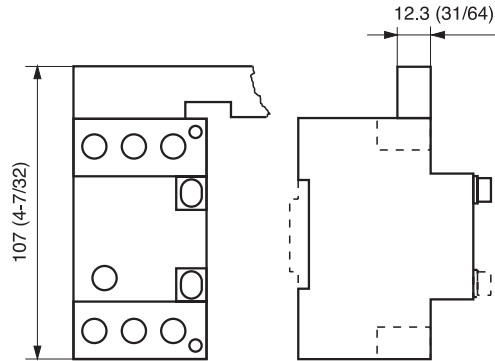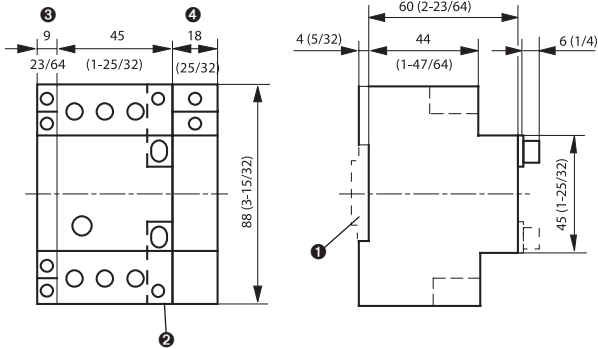


- ① DIN rail (EN 50022-35)
- ② KT4 w/KT4-C-AEA (no dimension change)
- ③ KT4-C-ASA
- ④ KT4-C-SXB or KT4-C-UXA

KT4-C-WT

KT4-C2A with KT4-C-WT

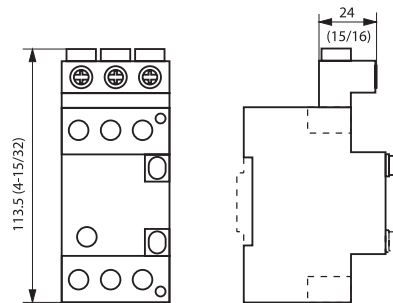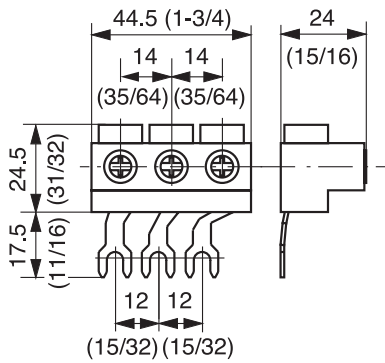

KT4-C-N12




F


KT4 Manual Motor Starters

KT4-C-EA55 Enclosure

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

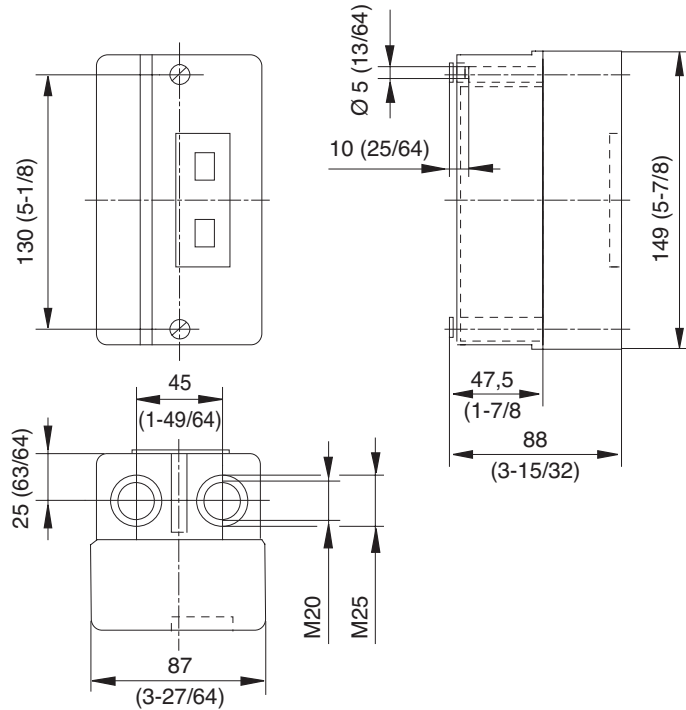

KT4-C-EE41 Enclosure

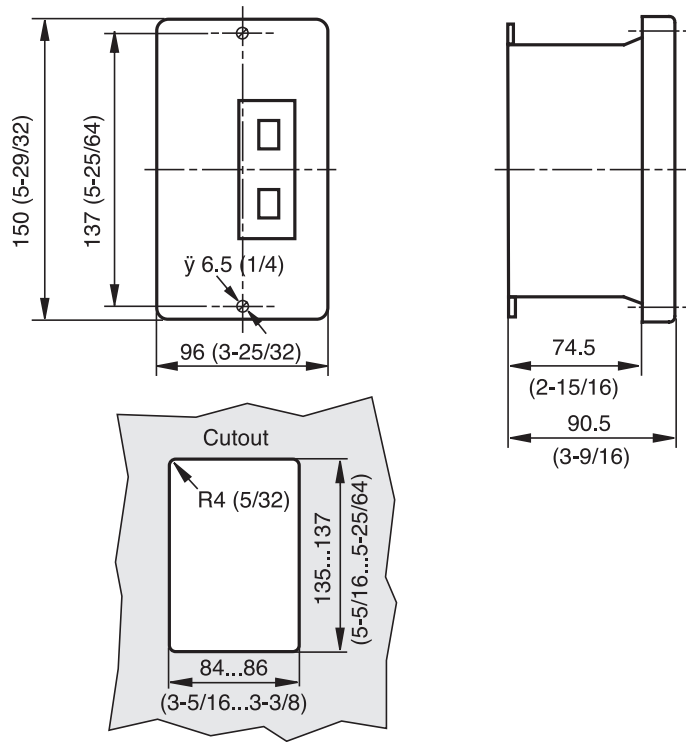

F
KT4 Manual Motor Starters

