




Stack Modules up to 5 levels



Ordering Instructions

- 1) Determine the number of levels (up to five) required in the Warning Tower Light
- 2) Choose the Base required (Table A)
- 3) Choose Base & Cap color (Table B) and control voltage (Table C)
- 4) Choose Module Type (Table D) and Lens color (Table E) for up to five levels until the entire catalog number is complete
- 5) Add all Price adders and total your selections.

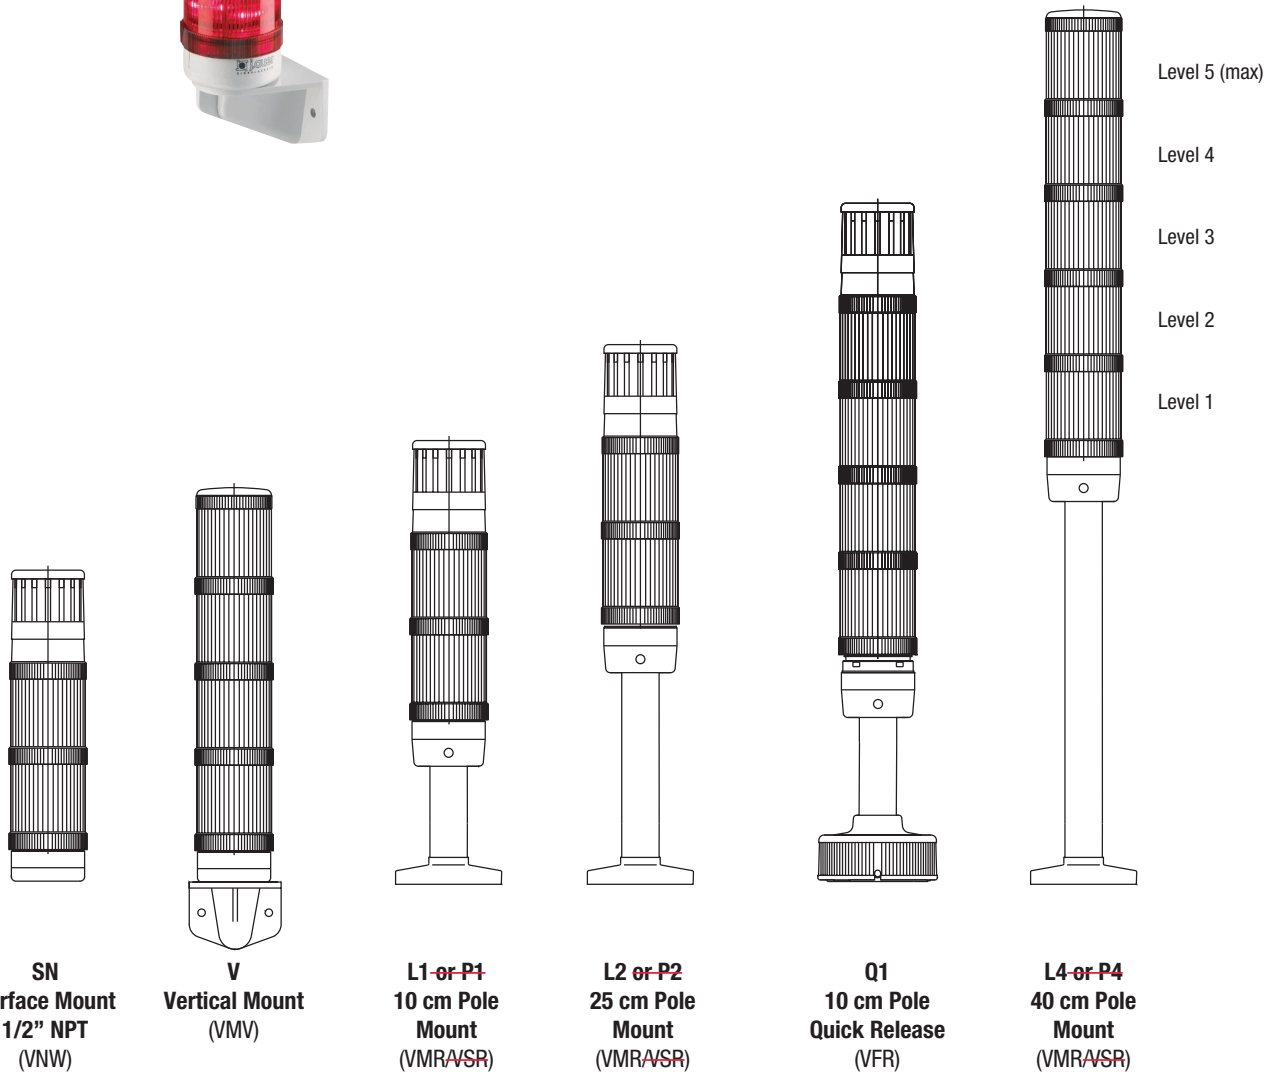

Warning Tower Lights

	Level One		Level Two		Level Three		Level Four		Level Five					
	A	B	C	D	D	E	D	E	D	E				
WTL50 –	V	G	24	Y	3	Y	4	Y	5	L	7	AS		
Example:	\$ 64	~	~	\$ 174	~	\$ 174	~	\$ 174	~	\$ 221	~	\$ 144	~	= \$ 951



			Level One		Level Two		Level Three		Level Four		Level Five			
WTL50 –			A	B	C	D	E	D	E	D	E	D	E	=

			~		~		~		~		~		~	

Catalog Code	Description	Price Adder
X	Modules only (no base)	~
SN	Surface Mount (1/2" NPT Threading)	55
SM	Surface Mount (M20 Threading)	55
V	Vertical Mount	64
L	Pole Mount Base - 5cm [≈2"] aluminum tube w/polycarbonate foot	93
L1	Pole Mount Base - 10cm [≈4"] aluminum tube w/polycarbonate foot	93
L2	Pole Mount Base - 25cm [≈9-7/8"] aluminum tube w/polycarbonate foot	102
L4	Pole Mount Base - 40cm [≈15-3/4"] aluminum tube w/polycarbonate foot	110
L5	Pole Mount Base - 50cm [≈19-11/16"] aluminum tube w/polycarbonate foot	129
L8	Pole Mount Base - 80cm [≈31-1/2"] aluminum tube w/polycarbonate foot	147
P	Pole Mount Base - 5cm [≈2"] stainless steel w/zinc die-cast foot	179
P1	Pole Mount Base - 10cm [≈4"] stainless steel w/zinc die-cast foot	179
P2	Pole Mount Base - 25cm [≈9-7/8"] stainless steel w/zinc die-cast foot	211
P4	Pole Mount Base - 40cm [≈15-3/4"] stainless steel w/zinc die-cast foot	233
P6	Pole Mount Base - 60cm [≈23-5/8"] stainless steel w/zinc die-cast foot	260
P8	Pole Mount Base - 80cm [≈31-1/2"] stainless steel w/zinc die-cast foot	317
Q1	Quick Release Pole Mount Base - 10cm [≈4"] aluminum tube w/foot adapter	263
Q2	Quick Release Pole Mount Base - 25cm [≈9-7/8"] aluminum tube w/foot adapter	273
Q3	Quick Release Pole Mount Base - 40cm [≈15-3/4"] aluminum tube w/foot adapter	291

Gray denotes special order

Catalog Code	Description	Price Adder
B	Black	~
G	Gray	~

Catalog Code	Description	Price Adder
12	12V AC/DC Full Voltage	~
24	24V AC/DC Full Voltage	~
120	120V AC Full Voltage	~
240	240V AC Full Voltage	~

Catalog Code	Description	Price Adder
D	Steady Incandescent ❷	55
F	Flashing Incandescent ❷	102
Y	Steady LED (VLL + LLL)	174
Z	Steady Integrated LED light ❸	125
L	Flashing LED (VLB + LLL) ❷	221
M	Flashing Integrated LED light ❸	174
B	Strobe - Xenon	215
BS	Strobe Integrated LED Single ❸	230
S	Strobe Integrated LED Multi ❸	245
AS	Sound - single circuit, dual tone ❹	144
AD	Sound - dual circuit, dual tone ❹	154



Catalog Code	Description	Price Adder
3	Green	~
4	Red	~
5	Amber	~
6	Blue	~
7	Clear	~
8	Yellow	~

- ❶ For a Pole Mount Base with Junction Box, order desired Pole Mount from this table and field install Junction Box as an accessory.
- ❷ Assembled as a Flashing Module with Steady LED bulb (LLL).
- ❸ Sound Modules must be installed as the last component (top level) of the tower light assembly. If selecting Dual Tone Sound Modules a maximum of four modules, consisting of three Light Modules and one Dual Sound Module, is possible.

- ❹ Assembly includes incandescent bulbs.
- ❺ Not available in 12V AC/DC.
- ❻ Lens color codes for assembled towers do not correspond with color codes for ordering individual beacon modules as components. **Some modules have limited colors and voltages. See component pages for details.**




Light Modules 50 mm us Type 4/4X/13




Type	Description	Specifications	Catalog Number ^①		Price
Light Modules		Replace ^② with Lens Color			
	VLL Steady Light (no bulb) ^②	up to 250 V AC/DC	750 00^③ 900		46.11
	VLB Flashing light (no bulb) ^②	12-24 V AC/DC	760 00^③ 405		89.26
		110/120 V AC	760 00^③ 310		
		230/240 V AC	760 00^③ 313		
	VLF Strobe light 3 J Xenon tube included	12-24 V AC/DC	770 00^③ 405		180.15
		110/120 V AC	770 00^③ 310		
		230/240 V AC	770 00^③ 313		
VDC Integrated LED Steady light	24 V AC/DC	751 00^③ 405		113.87	
	110/120 V AC	751 00^③ 310			
	230/240 V AC	751 00^③ 313			
VDA Integrated LED Flashing light	24 V AC/DC	761 00^③ 405		158.50	
	110/120 V AC	761 00^③ 310			
	230/240 V AC	761 00^③ 313			
VDF Integrated LED Strobe light	24 V AC/DC	771 00^③ 405		209.52	
	110/120 V AC	771 00^③ 310			
	230/240 V AC	771 00^③ 313			
VFF Integrated LED Multi-Strobe light	24 V AC/DC	772 00^③ 405		223.18	
	110/120 V AC	772 00^③ 310			
	230/240 V AC	772 00^③ 313			
	Incandescent Bulb Puller	Steady & Flashing modules	WTL-BULBPL		6.23

Available in Red & Amber only

Sound Modules 50 mm us Type 4/4X/13

Type	Description	Specifications	Catalog Number				③
			Grey Housing	Black Housing	Price	Silver Housing	
	VDE Piezo Buzzer continuous/pulsing tone (103/88 dB)	12 V AC/DC	781 100 404	781 500 404	130.33	781 800 404	R/F
		24 V AC/DC	781 100 405	781 500 405		781 800 405	
		110/120 V AC	781 100 310	781 500 310		781 800 310	
		230/240 V AC	781 100 313	781 500 313		781 800 313	
	VDZ Piezo Buzzer continuous/pulsing tone (103/88 dB) tone type externally switchable	12 V AC/DC	782 100 404	782 500 404	155.85	782 800 404	R/F
		24 V AC/DC	782 100 405	782 500 405		782 800 405	
		110/120 V AC	782 100 310	782 500 310		782 800 310	
		230/240 V AC	782 100 313	782 500 313		782 800 313	

Mounting Bases 50 mm us Type 4/4X/13

Type	Description	Specification	Catalog Number		Price
			Black Housing		
	BDW Pole Connection Box for VMR for horizontal mounting	NPT 1/2" M20 PG 16	841 502 900 841 501 900 841 503 900		47.16
	BDV Pole Connection Box for VMR for vertical mounting	NPT 1/2" M20 PG 16	841 512 900 841 511 900 841 513 900		67.13
	BDM Pole Connection Box for VMR for horizontal magnetic mounting	NPT 1/2" M20 PG 16	841 522 900 841 521 900 841 523 900		134.27

R/F - Refer to Factory.
Special Order Only.

① To complete the catalog no., replace the ^② with one of the following numbers for desired lens color: 1 = Amber, 2 = Red, 4 = Clear, 5 = Blue, 6 = Green, 7 = Yellow.








② Bulb not included. Order separately on page J39.

③ Silver housing available in quantities of 100 or more. Contact factory for more information.






Pole Mounting Bases 50 mm



Type	Description	Specification	Catalog Number				①
			Grey Housing	Black Housing	Price	Silver Housing	
 <p>VMR Pole Mount Base on aluminum tube with plastic foot</p>		5 cm	790 141 900	790 541 900	79.92	790 841 900	R/F
		10 cm	790 142 900	790 542 900	87.78	790 842 900	
		25 cm	790 143 900	790 543 900	97.27	790 843 900	
		40 cm	790 144 900	790 544 900	106.00	790 844 900	
		50 cm	790 145 900	790 545 900	110.86	790 845 900	
		60 cm	790 146 900	790 546 900	122.00	790 846 900	
 <p>VSR Pole Mount Base on stainless steel tube with zinc die cast foot powder coated</p>		5 cm	790 151 900	790 551 900	153.83	790 851 900	R/F
		10 cm	790 152 900	790 552 900	153.83	790 852 900	
		25 cm	790 153 900	790 553 900	181.33	790 853 900	
		40 cm	790 154 900	790 554 900	200.23	790 854 900	
		60 cm	790 156 900	790 556 900	223.44	790 856 900	
		80 cm	790 157 900	790 557 900	272.42	790 857 900	
 <p>VSW Pole Mount Base on aluminum tube for horizontal mounting with screw</p>		5 cm	790 171 900	790 571 900	153.83	790 871 900	R/F
		10 cm	790 172 900	790 572 900	156.41	790 872 900	
		25 cm	790 173 900	790 573 900	181.33	790 873 900	
		40 cm	790 174 900	790 574 900	200.23	790 874 900	
		50 cm	790 175 900	790 575 900	217.42	790 875 900	
		80 cm	790 177 900	790 577 900	272.42	790 877 900	
 <p>BSS Set for vertical mounting</p>		for VSW	200 400 900	200 800 900	43.31		
 <p>VFR Quick Release Pole Mount on aluminum tube with foot adapter for quick mounting</p>		10 cm	790 182 900	790 582 900	217.00	790 882 900	R/F
		25 cm	790 183 900	790 583 900	228.00	790 883 900	
		40 cm	790 184 900	790 584 900	239.00	790 884 900	
 <p>VNW Base for Horizontal Mounting VMW Base for Horizontal Mounting</p>		1/2" NPT	790 130 900	790 530 900	52.79	790 830 900	R/F
		M20	790 120 900	790 520 900	52.79	790 820 900	
 <p>VMV Base for vertical mounting</p>			790 140 900	790 540 900	60.67	790 840 900	

Accessories

 <p>Safety Screw Set (5)</p>	All Modules		700 000 900	6.23
 <p>Replacement Cap</p>	All Modules	698 803 002	698 803 003	6.41
 <p>Replacement Gaskets (5 per bag)</p>	Pole Mount Base		698 800 002	4.73
	Vertical Base		698 800 000	4.73
<p>Replacement O-Rings (5 per bag)</p>	Surface Mount Base		698 800 001	3.38
	Modules, bases, caps		698 800 003	4.98

R/F - Refer to Factory.
Special Order Only.

① Silver housing available in quantities of 100 or more. Contact factory for more information.