




Beacons P 75 mm ø CE

Type	Description	Specifications	Catalog Number	Price
	Replace ☉ with lens color		Black Housing ①	
<b>Low Model Lens</b>  PCL on Horizontal Mount (included)	<b>PCL</b> Integrated LED Steady/Flashing Beacon	24 V AC/DC <del>110/120 V AC</del> 230/240 V AC	<b>861 50☉ 405</b> <del>861 50☉ 310</del> <b>861 50☉ 313</b>	177.03
	<b>PFL</b> Integrated LED Multi-Strobe Beacon <i>Amber or red only</i>	24 V AC/DC <del>110/120 V AC</del> 230/240 V AC	<b>861 51☉ 405</b> <del>861 51☉ 310</del> <b>861 51☉ 313</b>	203.59
	<b>PXL</b> Strobe Beacon (Xenon tube included)	<del>110/120 V AC, -2 J</del> <del>230/240 V AC, -2 J</del> <del>10-100 V DC / 20-70 V AC, -2 J</del>	<b>861 52☉ 310</b> <del>861 52☉ 313</del> <b>861 52☉ 410</b>	<del>190.31</del>
<b>High Model Lens</b>  PCH on Horizontal Mount (included)	<b>PCH</b> Integrated LED Steady/Flashing Beacon	24 V AC/DC <del>110/120 V AC</del> 230/240 V AC	<b>860 50☉ 405</b> <del>860 50☉ 310</del> <b>860 50☉ 313</b>	234.57
	<b>PFH</b> Integrated LED Multi-Strobe Beacon <i>Amber or red only</i>	24 V AC/DC <del>110/120 V AC</del> 230/240 V AC	<b>860 51☉ 405</b> <del>860 51☉ 310</del> <b>860 51☉ 313</b>	247.84
	<b>PXH</b> Strobe Beacon (Xenon tube included)	<del>110/120 V AC, -5 J</del> <del>230/240 V AC, -5 J</del> <del>10-100 V DC / 20-70 V AC, -5 J</del>	<b>860 52☉ 310</b> <del>860 52☉ 313</del> <b>860 52☉ 410</b>	<del>199.16</del>
	<b>PMH</b> Integrated LED Multi-Color Beacon Red-Yellow-Green	24 V AC/DC <del>110/120 V AC</del> 230/240 V AC	<b>860 550 405</b> <del>860 550 310</del> <b>860 550 313</b>	402.75
	<b>PVW</b> Vertical Mounting Bracket		<b>860 600 900</b>	32.75
	<b>PMR</b> Pole Mount Base on aluminum tube with plastic foot	10 cm	<b>860 702 900</b>	75.24
		25 cm	<b>860 703 900</b>	84.09

Pre-wired for versatile mounting options.

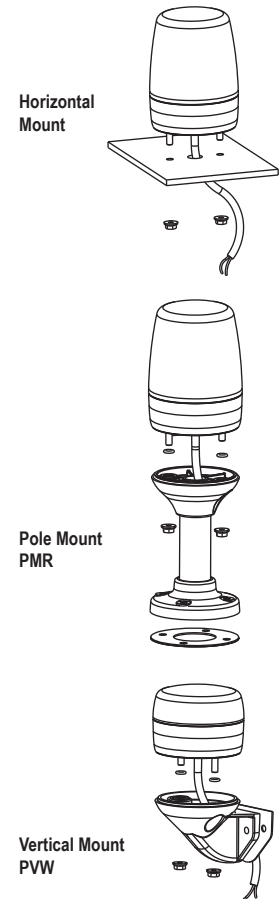

Beacons and Alarms

① To complete the catalog no., replace the ☉ with one of the following numbers for desired lens color: 1 = Amber, 2 = Red, 4 = Clear, 5 = Blue, 6 = Green, 7 = Yellow.